

---

This is a reproduction of a library book that was digitized by Google as part of an ongoing effort to preserve the information in books and make it universally accessible.

Google™ books

<https://books.google.com>



HAND BOOK  
OF GASOLINE  
AUTOMOBILES

ABT

1 9 1 Digitized by Google




HAL OF AUT

OF GASOLINE  
AUTOMOBILES



1 9 1 3

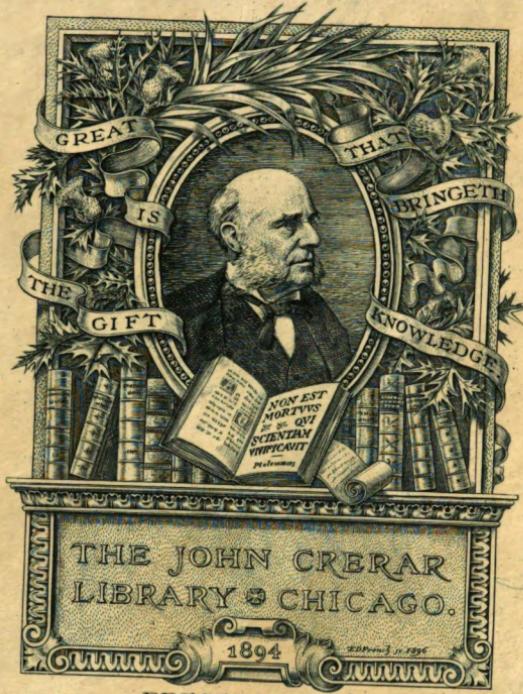

THE JOHN CRERAR  
LIBRARY • CHICAGO.

PRESENTED BY  
Association of licensed  
automobile manufacturers.





TENTH ANNUAL  
HANDBOOK OF  
**GASOLINE**  
**AUTOMOBILES**



# HAND BOOK OF GASOLINE AUTOMOBILES



1913

A U T O M O B I L E  
B O A R D O F T R A D E

THE  
AUTOMOBILE  
YEARBOOK

Copyright, 1913, by the  
AUTOMOBILE BOARD OF TRADE  
New York City, N. Y.

Engraved and Printed by  
Clarkson & Reed  
New York

## TENTH ANNUAL ANNOUNCEMENT

**S**O successful were the results from the previous issues of the Hand Book, that they fully justify its present standardized form as a permanent annual publication for the convenience of the prospective purchaser of an automobile, besides being accepted as a standard authority on the subject with which it deals. Its illustrations and specifications fully and correctly describe the products of the principal manufacturers of automobiles throughout the United States.

All the machines herein described are subjected to one uniform series of interrogations. This makes comparison both easy and accurate, and enables the purchaser to select a machine best suited to his needs. Such a method of comparison is obviously of advantage to the purchaser.

Catalogues of individual makers, giving further details, can be obtained from the dealer in your vicinity, or can be had by addressing any company represented herein, using one of the "catalogue request blanks" in the back of the book.

January, 1913.

G. E. C.  
A.

337843

# ORGANIZATION OF AUTOMOBILE BOARD OF TRADE

## OFFICERS

Charles Clifton, <i>President</i>	.	.	Pierce-Arrow Motor Car Company
C. C. Hanch, <i>Vice-President</i>	.	.	Nordyke & Marmon Company
R. D. Chapin, <i>Secretary</i>	.	.	Hudson Motor Car Company
George Pope, <i>Treasurer</i>	.	.	Pope Manufacturing Company
H. A. Bonnell, <i>General Manager</i>	.	.	Automobile Board of Trade

## BOARD OF DIRECTORS

Charles Clifton	.	.	Pierce-Arrow Motor Car Company
C. C. Hanch	.	.	Nordyke & Marmon Company
S. T. Davis, Jr.	.	.	Locomobile Company of America
Hugh Chalmers	.	.	Chalmers Motor Company
S. D. Waldon	.	.	Packard Motor Car Company
W. C. Leland	.	.	Cadillac Motor Car Company
John N. Willys	.	.	Willys-Overland Company

## PATENTS COMMITTEE

C. C. Hanch	.	.	Nordyke & Marmon Company
W. H. Van Dervoort	.	.	Moline Automobile Company
L. H. Kittredge	.	.	Peerless Motor Car Company
L. E. Latta	.	.	United States Motor Company
A. Macauley	.	.	Packard Motor Car Company

## TRADE COMMITTEE

H. O. Smith	.	.	Premier Motor Manufacturing Company
E. C. Howard	.	.	Cadillac Motor Car Company
W. E. Metzger	.	.	Flanders Motor Company
C. W. Churchill	.	.	Winton Motor Car Company
W. T. White	.	.	The White Company

## STATISTICAL COMMITTEE

S. D. Waldon	.	.	Packard Motor Car Company
W. H. Whiteside	.	.	Stevens-Duryea Company
J. S. Clarke	.	.	Autocar Company

## SHOW COMMITTEE

George Pope	.	.	Pope Manufacturing Company
Alfred Reeves	.	.	United States Motor Company
M. L. Downs	.	.	Automobile Board of Trade

## LEGISLATION AND LAW COMMITTEE

G. H. Stilwell . . . . .	H. H. Franklin Manufacturing Company
Albert L. Pope . . . . .	Pope Manufacturing Company
J. I. Farley . . . . .	Auburn Automobile Company

## INTERCOURSE AND ARBITRATION COMMITTEE

G. E. Daniels . . . . .	Oakland Motor Car Company
W. C. Shepherd . . . . .	Matheson Automobile Company
G. A. Matthews . . . . .	Jackson Automobile Company

## GOOD ROADS COMMITTEE

R. D. Chapin . . . . .	Hudson Motor Car Company
S. D. Waldon . . . . .	Packard Motor Car Company
J. N. Willys . . . . .	Willys-Overland Company

## PUBLICITY COMMITTEE

Alfred Reeves . . . . .	United States Motor Company
H. W. Ford . . . . .	Chalmers Motor Company
J. J. Cole . . . . .	Cole Motor Car Company

## MECHANICAL COMMITTEE

A. L. Riker . . . . .	Locomobile Company of America
D. Ferguson . . . . .	Pierce-Arrow Motor Car Company
F. B. Stearns . . . . .	F. B. Stearns Company
C. W. Nash . . . . .	Buick Motor Company
H. E. Coffin . . . . .	Hudson Motor Car Company

## ALPHABETICAL INDEX

PAGES		PAGES	
Abbott Motor Co. . . . .	137-140	Mercer Automobile Co. . . . .	15-17
American Locomotive Co. . . . .	50	Mitchell-Lewis Motor Co. . . . .	123-125
American Motors Co. . . . .	156-158	Moline Automobile Co. . . . .	23-24
Auburn Automobile Co. . . . .	145-147	Moon Motor Car Co. . . . .	37-38
Buick Motor Co. . . . .	51-55	National Motor Vehicle Co. . . . .	129
Cadillac Motor Car Co. . . . .	93-99	Nordyke & Marmon Co. . . . .	66-67
Cartercar Co. . . . .	126-128	Oakland Motor Car Co. . . . .	141-142
Case T. M. Co. Motor Wks. . . . .	116-117	Olds Motor Works . . . . .	56-57
Chalmers Motor Co. . . . .	74-77	Packard Motor Car Co. . . . .	103-105
Cole Motor Car Co. . . . .	118	Paige-Detroit Motor Car Co. . . . .	48-49
Columbia Motor Car Co. . . . .	113-114	Peerless Motor Car Co. . . . .	18-22
Cunningham, Son & Co., Jas. . . . .	72-73	Pierce-Arrow Motor Car Co. . . . .	81-90
Dayton Motor Car Co. . . . .	109-112	Pope Manufacturing Co. . . . .	100-102
Flanders Motor Co. . . . .	130	Premier Motor Mfg. Co. . . . .	134-135
Franklin Mfg. Co., H. H. . . . .	70-71	Pullman Motor Car Co. . . . .	39-41
Garford Company . . . . .	42-45	Regal Motor Car Co. . . . .	159
Haynes Automobile Co. . . . .	68-69	Reo Motor Car Co. . . . .	143-144
Herreshoff Motor Co. . . . .	131-133	Selden Motor Vehicle Co. . . . .	115
Hudson Motor Car Co. . . . .	64-65	S. G. V. Company . . . . .	151-152
Ideal Motor Car Co. . . . .	160	Stearns Co., F. B. . . . .	25-26
Imperial Automobile Co. . . . .	148-150	Stevens-Duryea Co. . . . .	91-92
Inter-State Automobile Co. . . . .	155	Thomas Motor Car Co., E. R. . . . .	122
Jackson Automobile Co. . . . .	119-121	Velie Motor Vehicle Co. . . . .	136
Knox Automobile Co. . . . .	58	Warren Motor Car Co. . . . .	153-154
Locomobile Co. of America . . . . .	78-80	White Company . . . . .	59-63
Lozier Motor Co. . . . .	46-47	Willys-Overland Co. . . . .	29-35
Matheson Automobile Co. . . . .	36	Winton Motor Car Co. . . . .	27-28
Maxwell-Briscoe Motor Co. . . . .	106-108		

## ALPHABETICAL INDEX—Continued

### COMMERCIAL VEHICLES

	PAGES		PAGES
Autocar Company . . . . .	176-177	Peerless Motor Car Co. . . . .	179
Federal Motor Truck Co. . . . .	187	Pierce-Arrow Motor Car Co. . . . .	178
Garford Company . . . . .	161-163	Pope Manufacturing Co. . . . .	175
General Motor Truck Co. . . . .	182	Reliance Motor Truck Co. . . . .	183
Hewitt Motor Co. . . . .	167	Reo Motor Car Co. . . . .	185-186
Knox Automobile Co. . . . .	180	Saurer Motor Co. . . . .	166
Locomobile Co. of America . . . . .	164	Selden Motor Vehicle Co. . . . .	181
Mack Bros. Motor Car Co. . . . .	165	Velie Motor Vehicle Co. . . . .	184
Nordyke & Marmon Co. . . . .	173	White Company . . . . .	168-172
Packard Motor Car Co. . . . .	174		

## INDEX OF TRADE NAMES

	PAGES		PAGES
Abbott-Detroit . . . . .	137-140	Mitchell . . . . .	123-125
Alco . . . . .	50	Moline . . . . .	23-24
American . . . . .	156-158	Moon . . . . .	37-38
Auburn . . . . .	145-147	National . . . . .	129
Buick . . . . .	51-55	Oakland . . . . .	141-142
Cadillac . . . . .	93-99	Oldsmobile . . . . .	56-57
Cartercar . . . . .	126-128	Overland . . . . .	29-35
Case . . . . .	116-117	Packard . . . . .	103-105
Chalmers . . . . .	74-77	Paige . . . . .	48-49
Cole . . . . .	118	Peerless . . . . .	18-22
Columbia . . . . .	113-114	Pierce-Arrow . . . . .	81-90
Cunningham . . . . .	72-73	Pope-Hartford . . . . .	100-102
Flanders . . . . .	130	Premier . . . . .	134-135
Franklin . . . . .	70-71	Pullman . . . . .	39-41
Garford . . . . .	42-45	Regal . . . . .	159
Haynes . . . . .	68-69	Reo . . . . .	143-144
Herreshoff . . . . .	131-133	Selden . . . . .	115
Hudson . . . . .	64-65	S. G. V. . . . .	151-152
Imperial . . . . .	148-150	Stearns . . . . .	25-26
Inter-State . . . . .	155	Stevens-Duryea . . . . .	91-92
Jackson . . . . .	119-121	Stoddard-Dayton . . . . .	109-112
Knox . . . . .	58	Stutz . . . . .	160
Locomobile . . . . .	78-80	Thomas . . . . .	122
Lozier . . . . .	46-47	Velie . . . . .	136
Marmon . . . . .	66-67	Warren . . . . .	153-154
Matheson . . . . .	36	White . . . . .	59-63
Maxwell . . . . .	106-108	Winton . . . . .	27-28
Mercer . . . . .	15-17		

## INDEX OF TRADE NAMES

### COMMERCIAL VEHICLES

	<b>PAGES</b>		<b>PAGES</b>
Autocar . . . . .	176-177	Packard . . . . .	174
Federal . . . . .	187	Peerless . . . . .	179
Garford . . . . .	161-163	Pierce-Arrow . . . . .	178
G. M. C. . . . .	182-183	Pope-Hartford . . . . .	175
Hewitt . . . . .	167	Reo . . . . .	185-186
Knox . . . . .	180	Saurer . . . . .	166
Locomobile . . . . .	164	Selden . . . . .	181
Mack . . . . .	165	Velie . . . . .	184
Marmon . . . . .	173	White . . . . .	168-172

## A. L. A. M. HORSE-POWER RATING

The formula adopted is  $\frac{D^2 \times N}{2.5}$  D is the cylinder bore in inches, N the number of cylinders, and 2.5 a constant, based on the average view of the A.L.A.M. engineers as to a fair conservative rating for a four-cycle motor at one thousand feet per minute piston speed.

**TABLE OF HORSE-POWER FOR USUAL SIZES OF MOTORS,  
BASED ON A. L. A. M. FORMULA**

Bore		Horse-Power			
In.	M / M	1 Cyl.	2 Cyls.	4 Cyls.	6 Cyls.
2½	64	2½	5	10	15
2¾	68	2¾	5½	11	16½
2⅓	70	3	6	12 <sup>1</sup> / <sub>10</sub>	18 <sup>1</sup> / <sub>2</sub>
2⅔	73	3 <sup>5</sup> / <sub>16</sub>	6 <sup>5</sup> / <sub>8</sub>	13 <sup>3</sup> / <sub>4</sub>	19 <sup>3</sup> / <sub>8</sub>
3	76	3 <sup>1</sup> / <sub>2</sub>	7 <sup>1</sup> / <sub>2</sub>	14 <sup>2</sup> / <sub>5</sub>	21 <sup>3</sup> / <sub>5</sub>
3⅓	79	3 <sup>15</sup> / <sub>16</sub>	7 <sup>13</sup> / <sub>16</sub>	15 <sup>5</sup> / <sub>8</sub>	23 <sup>7</sup> / <sub>8</sub>
3⅔	83	4 <sup>1</sup> / <sub>4</sub>	8 <sup>1</sup> / <sub>2</sub>	16 <sup>8</sup> / <sub>10</sub>	25 <sup>2</sup> / <sub>5</sub>
3⅔	85	4 <sup>9</sup> / <sub>16</sub>	9 <sup>5</sup> / <sub>8</sub>	18 <sup>1</sup> / <sub>4</sub>	27 <sup>3</sup> / <sub>8</sub>
3½	89	4 <sup>1</sup> / <sub>10</sub>	9 <sup>4</sup> / <sub>5</sub>	19 <sup>3</sup> / <sub>5</sub>	29 <sup>2</sup> / <sub>5</sub>
3¾	92	5 <sup>1</sup> / <sub>4</sub>	10 <sup>1</sup> / <sub>2</sub>	20 <sup>1</sup> / <sub>4</sub>	31 <sup>1</sup> / <sub>2</sub>
3¾	95	5 <sup>5</sup> / <sub>8</sub>	11 <sup>1</sup> / <sub>4</sub>	22 <sup>1</sup> / <sub>2</sub>	33 <sup>3</sup> / <sub>4</sub>
3⅔	99	6	12	24	36 <sup>1</sup> / <sub>8</sub>
4	102	6 <sup>2</sup> / <sub>5</sub>	12 <sup>4</sup> / <sub>5</sub>	25 <sup>3</sup> / <sub>8</sub>	38 <sup>2</sup> / <sub>5</sub>
4⅓	105	6 <sup>13</sup> / <sub>16</sub>	13 <sup>5</sup> / <sub>8</sub>	27 <sup>1</sup> / <sub>4</sub>	40 <sup>6</sup> / <sub>5</sub>
4⅔	108	7 <sup>1</sup> / <sub>4</sub>	14 <sup>1</sup> / <sub>2</sub>	28 <sup>1</sup> / <sub>10</sub>	43 <sup>5</sup> / <sub>8</sub>
4⅔	111	7 <sup>5</sup> / <sub>8</sub>	15 <sup>5</sup> / <sub>16</sub>	30 <sup>5</sup> / <sub>8</sub>	45 <sup>1</sup> / <sub>8</sub>
4½	114	8 <sup>1</sup> / <sub>10</sub>	16 <sup>1</sup> / <sub>5</sub>	32 <sup>2</sup> / <sub>5</sub>	48 <sup>3</sup> / <sub>5</sub>
4¾	118	8 <sup>9</sup> / <sub>16</sub>	17 <sup>1</sup> / <sub>8</sub>	34 <sup>1</sup> / <sub>4</sub>	51 <sup>3</sup> / <sub>5</sub>
4¾	121	9	18	36 <sup>1</sup> / <sub>10</sub>	54 <sup>1</sup> / <sub>8</sub>
4⅔	124	9 <sup>1</sup> / <sub>2</sub>	19	38	57
5	127	10	20	40	60
5⅓	130	10 <sup>1</sup> / <sub>2</sub>	21	42	63
5⅔	133	11	22	44 <sup>1</sup> / <sub>10</sub>	66 <sup>1</sup> / <sub>2</sub>
5⅔	137	11 <sup>8</sup> / <sub>16</sub>	23	46	69 <sup>1</sup> / <sub>10</sub>
5½	140	12 <sup>1</sup> / <sub>10</sub>	24 <sup>1</sup> / <sub>5</sub>	48 <sup>1</sup> / <sub>2</sub>	72 <sup>3</sup> / <sub>5</sub>
5¾	143	12 <sup>5</sup> / <sub>8</sub>	25 <sup>5</sup> / <sub>16</sub>	50 <sup>5</sup> / <sub>8</sub>	75 <sup>1</sup> / <sub>8</sub>
5¾	146	13 <sup>1</sup> / <sub>4</sub>	26 <sup>1</sup> / <sub>2</sub>	53	79 <sup>1</sup> / <sub>2</sub>
5¾	149	13 <sup>13</sup> / <sub>16</sub>	27 <sup>5</sup> / <sub>8</sub>	55 <sup>1</sup> / <sub>4</sub>	82 <sup>1</sup> / <sub>10</sub>
6	152	14 <sup>4</sup> / <sub>5</sub>	28 <sup>4</sup> / <sub>5</sub>	57 <sup>3</sup> / <sub>8</sub>	86 <sup>3</sup> / <sub>5</sub>

To simplify reading of the above, the horse-power figures are approximate, but correct within one-sixteenth.


## **ILLUSTRATIONS AND SPECIFICATIONS**

---



M E R C E R  
A U T O M O B I L E  
C O M P A N Y  
T R E N T O N , N . J .

Price . . . . . \$2900  
Five-Passenger Touring Car . . . 2900

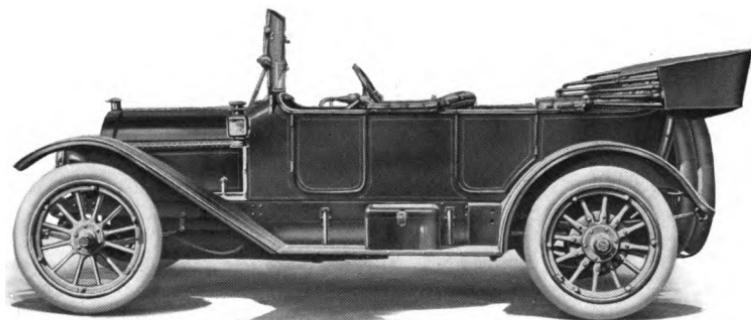


MODEL: MERCER 35-SERIES G

COLOR . . . . .	Brown, blue, green, gray or red.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Four persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5 inches.
WHEELBASE . . . . .	118 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRES DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	34 x 4 inches.	ELECTRIC SOURCE .	High tension magneto.
REAR . . . . .	34 x 4 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS .	Contracting on transmission and expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 32.4.	GEAR CHANGES . .	Four forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield and demountable rims.

M E R C E R  
A U T O M O B I L E  
C O M P A N Y  
T R E N T O N , N . J .

P r i c e . . . . . \$ 2600

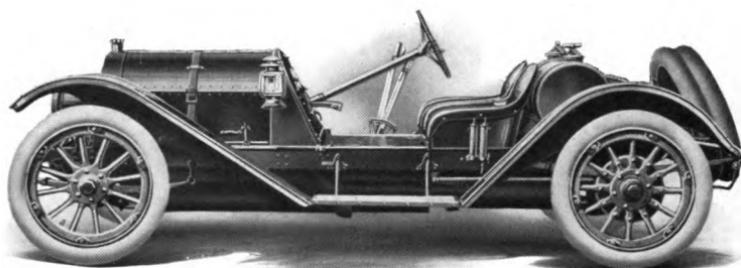


**MODEL: MERCER 35—SERIES J**

COLOR . . . . .	Yellow, blue or gray.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Two persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5 inches.
WHEELBASE . . . . .	108 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	32 x 4 inches.	ELECTRIC SOURCE . . . . .	High tension magneto.
REAR . . . . .	32 x 4 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . . . .	Contracting on transmission and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 30.6.	GEAR CHANGES . . . . .	Four forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes prestolite tank and demountable rims.

M E R C E R  
A U T O M O B I L E  
C O M P A N Y  
T R E N T O N , N . J .

P r i c e . . . . . \$ 2700

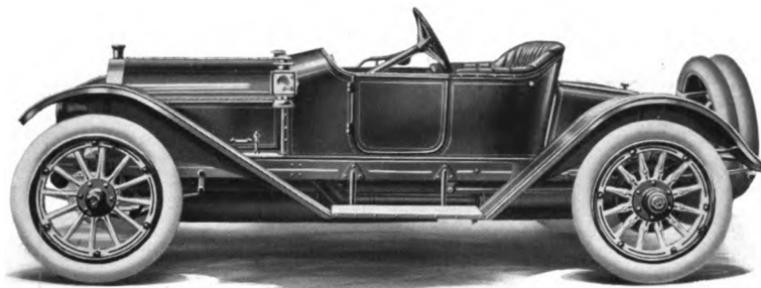

**MODEL: MERCER 35-SERIES K**


COLOR . . . . .	Blue, yellow or gray.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Two persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5 inches.
WHEELBASE . . . . .	108 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	32 x 4 inches.	ELECTRIC SOURCE .	High tension magneto.
REAR . . . . .	32 x 4 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . .	Contracting on transmission and expanding on both rear wheels.	TRANSMISSION . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 30.6.	GEAR CHANGES . . .	Four forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield and demountable rims.

MERCER AUTOMOBILE COMPANY, TRENTON, NEW JERSEY

**PEERLESS**  
**MOTOR CAR**  
**COMPANY**  
**CLEVELAND, OHIO**

Price . . . . .	\$4300
Four-Passenger Torpedo . . .	4300
Five-Passenger Touring Car . .	4300
Three-Passenger Coupe . . .	5000
Seven-Passenger Limousine . .	5300
Seven-Passenger Landaulet . .	5400
Berline Limousine . . . . .	5500

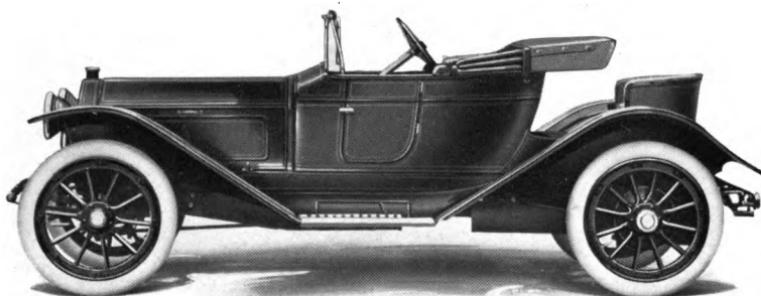


**MODEL: PEERLESS "38-SIX" ROADSTER**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Three persons.	BORE . . . . .	4 inches.
CLUTCH . . . . .	Expanding.	STROKE . . . . .	5½ inches.
WHEELBASE . . . . .	125 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Tubular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4½ inches.	ELECTRIC SOURCE . . . . .	High tension magneto and battery.
REAR . . . . .	36 x 4½ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 38.4.	GEAR CHANGES . . . . .	Four forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield and demountable rims.

**PEERLESS  
MOTOR CAR  
COMPANY**  
CLEVELAND, OHIO

Price . . . . .	\$5000
Seven-Passenger Touring Car	5000
Seven-Passenger Limousine	6000
Seven-Passenger Landaulet	6100
Berline Limousine . . . . .	6200

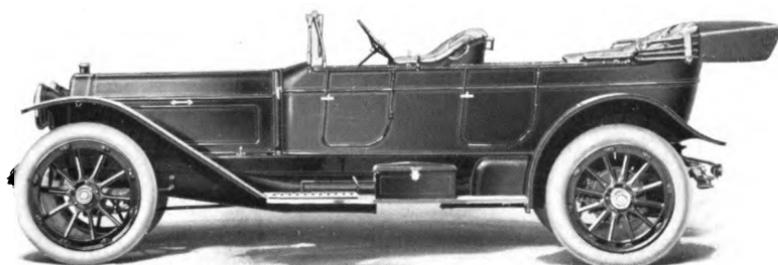


**MODEL: PEERLESS "48-SIX" TORPEDO**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Six persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Expanding.	STROKE . . . . .	6 inches.
WHEELBASE . . . . .	137 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Tubular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4½ inches.	ELECTRIC SOURCE .	High tension magneto and battery.
REAR . . . . .	37 x 5 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . .	Selective sliding gear.
HORSE-POWER . . . .	(A. L. A. M. rating) 48.6.	GEAR CHANGES . . .	Four forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield and demountable rims.

**PEERLESS  
MOTOR CAR  
COMPANY  
CLEVELAND, OHIO**

Price . . . . .	\$6000
Six-Passenger Torpedo . . . . .	6000
Seven-Passenger Limousine . . . . .	7000
Seven-Passenger Landaulet . . . . .	7100
Berline Limousine . . . . .	7200

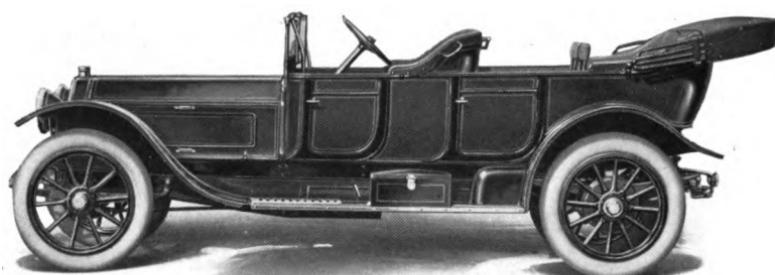

**MODEL: PEERLESS "60-SIX" TOURING CAR**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	5 inches.
CLUTCH . . . . .	Expanding.	STROKE . . . . .	7 inches.
WHEELBASE . . . . .	140 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Tubular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	38 x 5 1/2 inches.	ELECTRIC SOURCE .	High tension magneto and battery.
REAR . . . . .	38 x 5 1/2 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A.L.A.M. rating) 60.	GEAR CHANGES . . .	Four forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER .	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield and demountable rims.

**PEERLESS**  
**MOTOR CAR**  
**COMPANY**  
**CLEVELAND, OHIO**

Price . . . . .	\$5400
Seven-Passenger Touring . . .	4300
Six-Passenger Torpedo . . .	4300
Seven-Passenger Limousine . .	5300
Berline Limousine. . . . .	5500




**MODEL: PEERLESS "40-FOUR" LANDAULET**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	5 inches.
CLUTCH . . . . .	Expanding.	STROKE . . . . .	5½ inches.
WHEELBASE . . . . .	125 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Tubular.
<b>TIRE DIMENSIONS:</b>			
FRONT . . . . .	36 x 4½ inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	37 x 5 inches.	ELECTRIC SOURCE .	High tension magneto and battery.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . .	(A.L.A.M. rating) 40.	TRANSMISSION . . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . .	Four forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER	Right side drive and right hand control.

Price includes top, top hood, electric lighting, windshield and demountable rims.

**PEERLESS**  
**MOTOR CAR**  
**COMPANY**  
**CLEVELAND, OHIO**

Price . . . . .	\$4200
Limousine . . . . .	4200
Landaulet . . . . .	4300

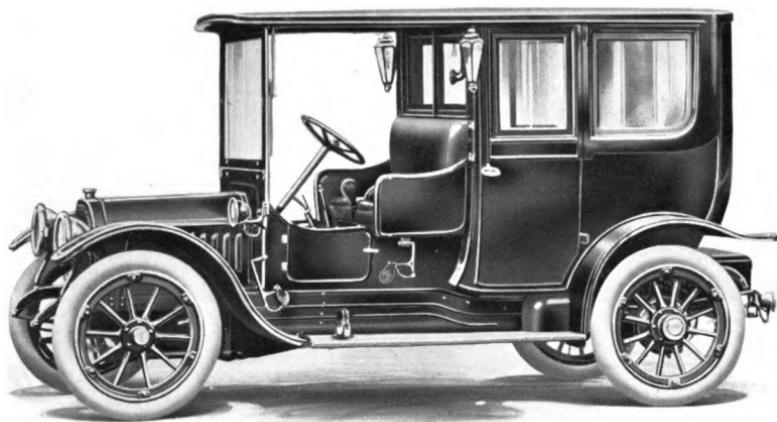


**MODEL: PEERLESS "24-FOUR" TOWN CAR**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Six persons.	BORE . . . . .	4 inches.
CLUTCH . . . . .	Expanding.	STROKE . . . . .	4½ inches.
WHEEL BASE . . . . .	113 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	54 inches.	RADIATOR . . . . .	Tubular.
TIRE DIMENSIONS:			
FRONT . . . . .	34 x 4 1/2 inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	34 x 4 1/2 inches.	ELECTRIC SOURCE .	High tension magneto and battery.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . .	(A. L. A. M. rating) 25.6.	TRANSMISSION . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . .	Four forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER	Right side drive and center control.

Price includes electric lighting, windshield and demountable rims.

MOLINE  
AUTOMOBILE  
COMPANY  
EAST MOLINE, ILL.

Price . . . . . \$1950

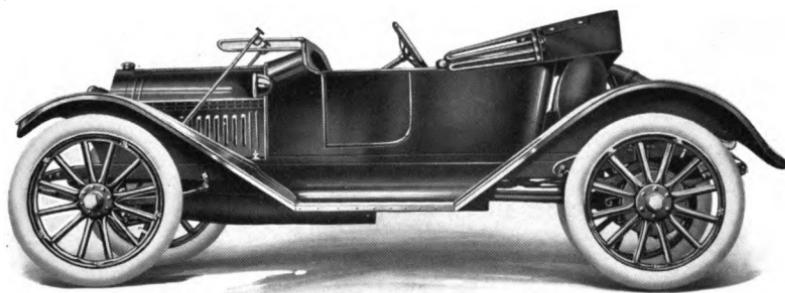


**MODEL: MOLINE DREADNAUGHT M-40 ROADSTER**

COLOR . . . . .	Body and running gear, blue-black; wheels, gray.	ARRANGED . . . . .	Vertically, under hood.
SEATING CAPACITY .	Two persons.	CAST . . . . .	In pairs.
CLUTCH . . . . .	Cone	BORE . . . . .	4½ inches.
WHEELBASE . . . . .	114 inches.	STROKE . . . . .	6 inches.
GAUGE . . . . .	56 or 60 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Flat vertical tube.
FRONT . . . . .	36 x 4 inches.	IGNITION . . . . .	Jump spark
REAR . . . . .	36 x 4 inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . . .	(A. L. A. M. rating) 27.2.	TRANSMISSION . . . . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . . . .	Three forward, one reverse.
POSITION OF DRIVER Right side drive and right hand control.			

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

MOLINE  
AUTOMOBILE  
COMPANY  
EAST MOLINE, ILL.

Price . . . . . \$1950

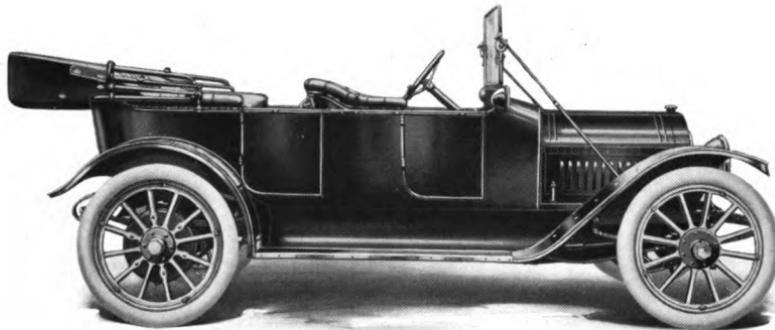


**MODEL: MOLINE DREADNAUGHT M-40 TOURING CAR**

COLOR . . . . .	Body and running gear, blue-black; wheels, gray.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Five persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	6 inches.
WHEELBASE . . . . .	124 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Flat vertical tube.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
REAR . . . . .	36 x 4 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 27.2.	GEAR CHANGES . . . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes electric lighting, electric self-starter, windshield and demountable rims.

THE F. B. STEARNS  
C O M P A N Y  
CLEVELAND, OHIO

Price . . . . .	\$5000
Five-Passenger Touring . . .	4850
Four-Passenger Touring . . .	4850
Three-Passenger Roadster . .	4850
Seven-Passenger Limousine .	6100
Seven-Passenger Landaulet .	6200

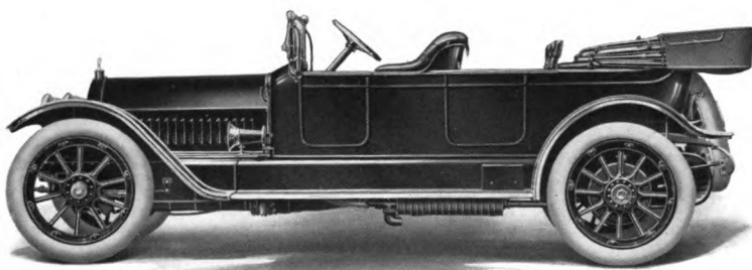


MODEL: STEARNS-KNIGHT SEVEN-PASSENGER TOURING CAR

COLOR . . . . .	Blue, maroon or green.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	4 $\frac{1}{4}$ inches.
CLUTCH . . . . .	Dry multiple disc.	STROKE . . . . .	5 $\frac{3}{4}$ inches.
WHEELBASE . . . . .	140 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 $\frac{1}{2}$ inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	37 x 5 inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
REAR . . . . .	37 x 5 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 43.8.	GEAR CHANGES . .	Four forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

**THE F. B. STEARNS  
C O M P A N Y  
CLEVELAND, OHIO**

Price . . . . .	\$3750
Seven-Passenger Touring . . .	3900
Four-Passenger Touring . . .	3750
Three-Passenger Roadster . .	3750
Seven-Passenger Limousine .	5000
Seven-Passenger Landaulet .	5100

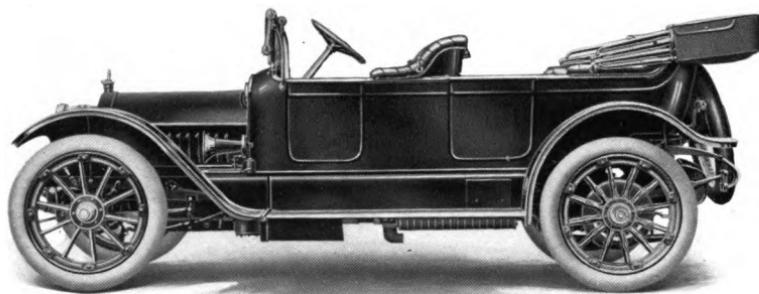

**MODEL: STEARNS-KNIGHT FIVE-PASSENGER TOURING CAR**


COLOR . . . . .	Blue, maroon or green.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4 $\frac{1}{4}$ inches.
CLUTCH . . . . .	Dry multiple disc.	STROKE . . . . .	5 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	121 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 $\frac{1}{2}$ inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
REAR . . . . .	36 x 4 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
Brake Systems . . .	Expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 28.9.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

PRINTED IN U.S.A. BY THE STEARNS-KNIGHT COMPANY, CLEVELAND, OHIO.

**THE WINTON  
MOTOR CAR  
COMPANY  
CLEVELAND, OHIO**

Price . . . . .	\$3000
Four-Passenger Touring . . .	3000
Six-Passenger Touring . . .	3250
Seven-Passenger Touring . . .	3250
Two-Passenger Roadster . . .	3000
Three-Passenger Roadster . . .	3000

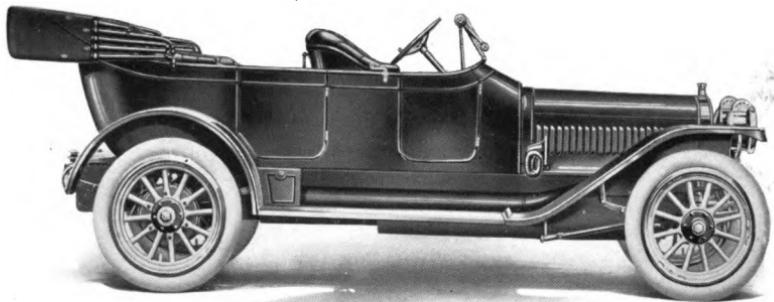


**MODEL: WINTON SIX TOURING CAR 17-D**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Five persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5 inches.
WHEELBASE . . . . .	130 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56½ or 60 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4½ inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
REAR . . . . .	36 x 4½ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 48.6.	GEAR CHANGES . . . . .	Four forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes prestolite tank, electric side and tail lights, self-starter and demountable rims.

**THE WINTON  
MOTOR CAR  
COMPANY**  
**CLEVELAND, OHIO**

Price . . . . .	\$4500
Landaulet . . . . .	4500
Three-quarter Limousine . . .	4250
Colonial Coupe . . . . .	4200

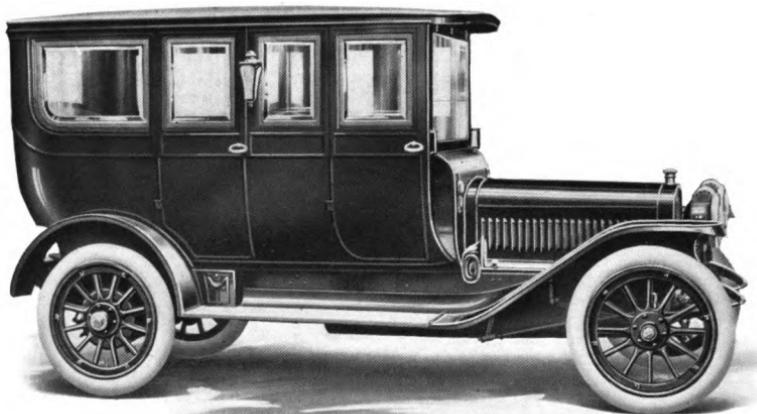


**MODEL: WINTON SIX LIMOUSINE 17-D**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	4 $\frac{1}{2}$ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5 inches.
WHEELBASE . . . . .	130 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 $\frac{3}{4}$ or 60 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 $\frac{1}{4}$ inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
REAR . . . . .	36 x 4 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . .	Selective sliding gear.
HORSE-POWER . . . .	(A. L. A. M. rating) 48.6.	GEAR CHANGES . . .	Four forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes prestolite tank, electric side and tail lights, self-starter and demountable rims.

W I L L Y S -  
O V E R L A N D  
C O M P A N Y  
T O L E D O , O H I O

Price . . . . . \$985

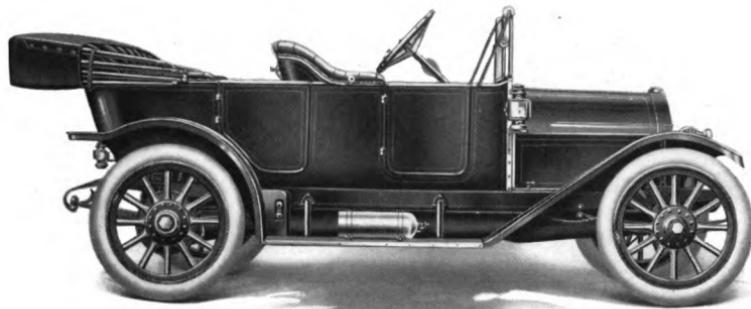


**MODEL: OVERLAND 69-T**

COLOR . . . . .	Body and running gear, Overland blue; wheels, gray.	ARRANGED . . . . .	Vertically, under hood.
SEATING CAPACITY .	Five persons.	CAST . . . . .	Separately.
CLUTCH . . . . .	Cone.	BORE . . . . .	4 inches.
WHEELBASE . . . . .	110 inches.	STROKE . . . . .	4½ inches.
GAUGE . . . . .	56 or 60 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Cellular.
FRONT . . . . .	32 x 3½ inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	32 x 3½ inches.	ELECTRIC SOURCE .	High tension magneto and dry batteries.
BRAKE SYSTEMS .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . .	(A. L. A. M. rating) 25.6.	TRANSMISSION . . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . .	Three forward, one reverse.
POSITION OF DRIVER Right side drive and left hand control.			

Price includes top, top hood, prestolite tank, self-starter, windshield and speedometer.

W I L L Y S -  
O V E R L A N D  
C O M P A N Y  
T O L E D O , O H I O

Price . . . . . \$985

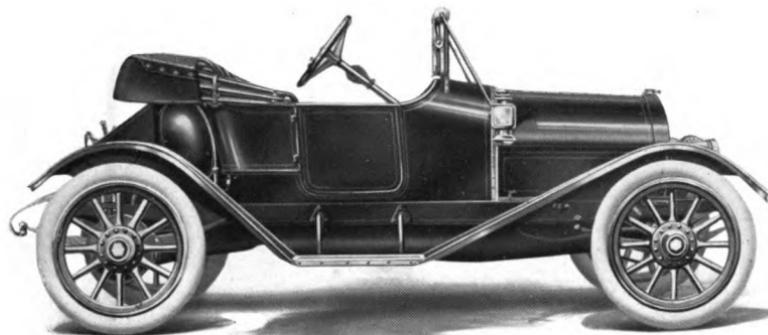


**MODEL: OVERLAND 69-R**

COLOR . . . . .	Body and running gear, Overland blue; wheels, gray.	CAST . . . . .	Separately.
SEATING CAPACITY .	Two persons.	BORE . . . . .	4 inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	4½ inches.
WHEELBASE . . . . .	110 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	32 x 3½ inches.	ELECTRIC SOURCE .	High tension magneto and dry batteries.
REAR . . . . .	32 x 3½ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 25.6.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and left hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, prestolite tank, self-starter, windshield and speedometer.

W I L L Y S -  
O V E R L A N D  
C O M P A N Y  
T O L E D O , O H I O

Price . . . . . \$1010

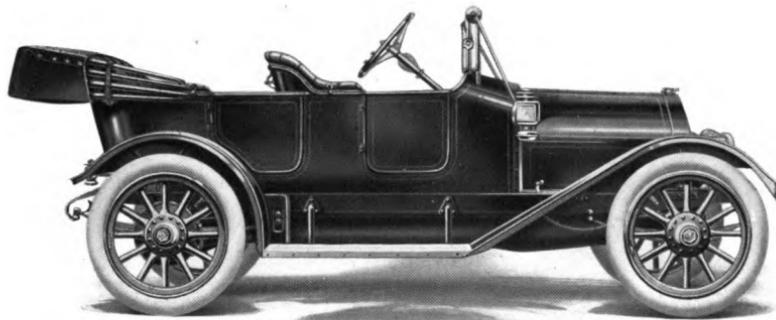


**MODEL: OVERLAND 69-F**

COLOR . . . . .	Body and running gear, Overland blue; wheels, gray.	ARRANGED . . . . .	Vertically, under hood.
SEATING CAPACITY .	Four persons.	CAST . . . . .	Separately.
CLUTCH . . . . .	Cone.	BORE . . . . .	4 inches.
WHEELBASE . . . . .	110 inches.	STROKE . . . . .	4½ inches.
GAUGE . . . . .	56 or 60 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Honeycomb.
FRONT . . . . .	32 x 3½ inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	32 x 3½ inches.	ELECTRIC SOURCE .	High tension magneto and dry batteries.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . .	(A. L. A. M. rating) 25.6.	TRANSMISSION . . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . .	Three forward, one reverse.
POSITION OF DRIVER Right side drive and left hand control.			

Price includes top, top hood, prestolite tank, self-starter, windshield and speedometer.

W I L L Y S -  
O V E R L A N D  
C O M P A N Y  
T O L E D O , O H I O

Price . . . . . \$1500

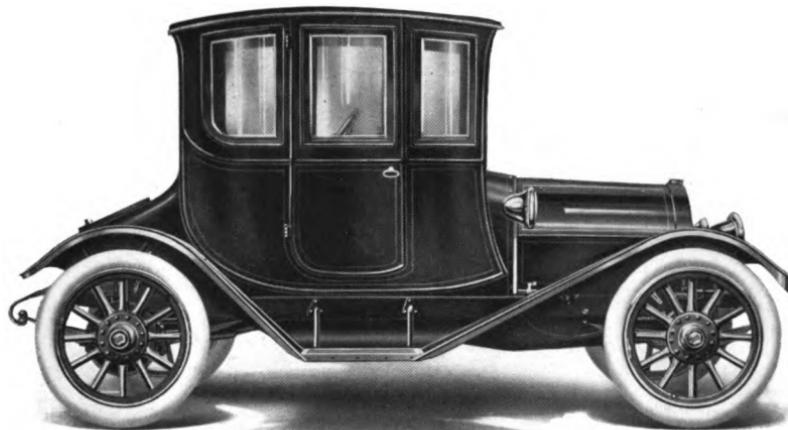


**MODEL: OVERLAND 69-COUPE**

COLOR . . . . .	Overland blue.	CAST . . . . .	Separately.
SEATING CAPACITY . . . . .	Three persons.	BORE . . . . .	4 inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	4½ inches.
WHEELBASE . . . . .	110 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	33 x 4 inches.	ELECTRIC SOURCE . . . . .	Magneto and storage battery charged by dynamo.
REAR . . . . .	33 x 4 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 25.6.	GEAR CHANGES . . . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER . . . . .	Right side drive and left hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes combination electric self-starter, electric side, head, tail and dome-lights and speedometer.

W I L L Y S -  
O V E R L A N D  
C O M P A N Y  
T O L E D O , O H I O

Price . . . . . \$1475

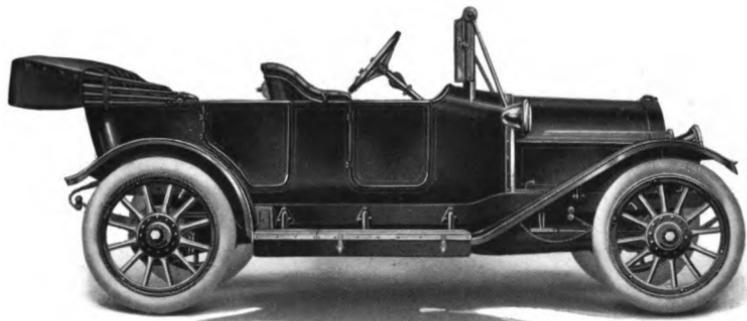


**MODEL: OVERLAND 71-T**

COLOR . . . . .	Brewster Green.	CAST . . . . .	Separately.
SEATING CAPACITY . . . . .	Five persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	4½ inches.
WHEELBASE . . . . .	114 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	34 x 4 inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery charged by dynamo.
REAR . . . . .	34 x 4 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 30.6.	GEAR CHANGES . . . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER . . . . .	Right side drive and left hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, prestolite tank, electric lighting, self-starter, windshield, speedometer and demountable rims.

W I L L Y S -  
O V E R L A N D  
C O M P A N Y  
T O L E D O , O H I O

P r i c e . . . . . \$1475

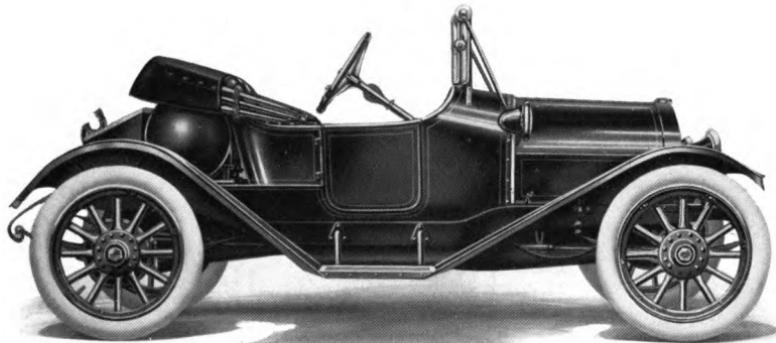

**MODEL: OVERLAND 71-R**


COLOR . . . . .	Brewster green.	CAST . . . . .	Separately.
SEATING CAPACITY . . . . .	Two persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	4½ inches.
WHEELBASE . . . . .	114 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	34 x 4 inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery charged by dynamo.
REAR . . . . .	34 x 4 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 30.6.	GEAR CHANGES . . . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER . . . . .	Right side drive and left hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, prestolite tank, electric lighting, self-starter, windshield, speedometer and demountable rims.

Copyright 1920 by Willys-Overland Company, Toledo, Ohio. All rights reserved. This advertisement is not a part of the printed catalog.

W I L L Y S -  
O V E R L A N D  
C O M P A N Y  
T O L E D O , O H I O

P r i c e . . . . \$ 1475

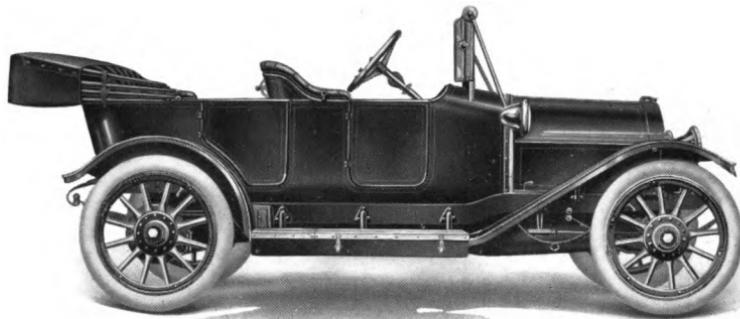

**MODEL: OVERLAND 71-F**

COLOR . . . .	Brewster green.	CAST . . . .	Separately.
SEATING CAPACITY .	Four persons.	BORE . . . .	4 $\frac{3}{8}$ inches.
CLUTCH . . . .	Cone.	STROKE . . . .	4 $\frac{1}{2}$ inches.
WHEELBASE . . . .	114 inches.	COOLING . . . .	Water.
GAUGE . . . .	56 or 60 inches.	RADIATOR . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . .	Jump spark.
FRONT . . . .	34 x 4 inches.	ELECTRIC SOURCE .	High tension magneto and storage battery charged by dynamo.
REAR . . . .	34 x 4 inches.	DRIVE . . . .	Shaft.
		TRANSMISSION . . .	Selective sliding gear.
		GEAR CHANGES . . .	Three forward, one reverse.
		POSITION OF DRIVER	Right side drive and left hand control.

Price includes top, top hood, prestolite tank, electric lighting, self-starter, windshield, speedometer and demountable rims.

M A T H E S O N  
A U T O M O B I L E  
C O M P A N Y  
WILKES-BARRE, PA.

Price . . . . .	\$4800
Five-Passenger Touring Car . . . . .	4800
Limousine . . . . .	6000
Berline-Limousine . . . . .	6500




**MODEL: MATHESON "SILENT SIX"—SERIES "C"**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Seven persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5 inches.
WHEELBASE . . . . .	135 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56½ inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:			
FRONT . . . . .	37 x 5 inches.	IGNITION . . . . .	Jump spark, double system.
REAR . . . . .	37 x 5 inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . . .	(A. L. A. M. rating) 48.6.	TRANSMISSION . . . . .	Selective sliding gear.
CYLINDERS . . . . .	Six.	GEAR CHANGES . . . . .	Three forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER . . . . .	Right side drive and center control.

Price includes top, prestolite tank, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

**MOON MOTOR  
CAR COMPANY**  
**ST. LOUIS, MO.**

Price . . . . .	\$1650
Five-Passenger Touring Car . . . . .	1650
Roadster . . . . .	1650
Speedster . . . . .	1650
Brougham Coupe . . . . .	1900

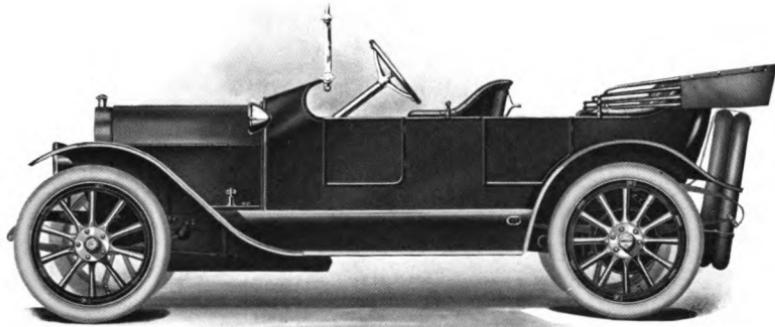


### MODEL: MOON "39" TORPEDO

COLOR . . . . .	Optional.	ARRANGED . . . . .	Vertically under hood.
SEATING CAPACITY . . . . .	Four persons.	CAST . . . . .	In pairs.
CLUTCH . . . . .	Multiple disc.	BORE . . . . .	4 inches.
WHEELBASE . . . . .	116 inches.	STROKE . . . . .	5½ inches.
GAUGE . . . . .	56 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Honeycomb.
FRONT . . . . .	34 x 4 inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	34 x 4 inches.	ELECTRIC SOURCE . . . . .	High tension magneto and dry batteries.
		DRIVE . . . . .	Shaft.
		TRANSMISSION . . . . .	Selective sliding gear.
		GEAR CHANGES . . . . .	Three forward, one reverse.
		POSITION OF DRIVER . . . . .	Left side drive and center control.

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

**MOON MOTOR  
CAR COMPANY**  
**ST. LOUIS, MO.**

Price . . . . .	\$1985
Five-Passenger Touring Car . . . . .	1985
Roadster . . . . .	1985
Speedster . . . . .	1985
Brougham Coupe . . . . .	2250
Limousine . . . . .	3000

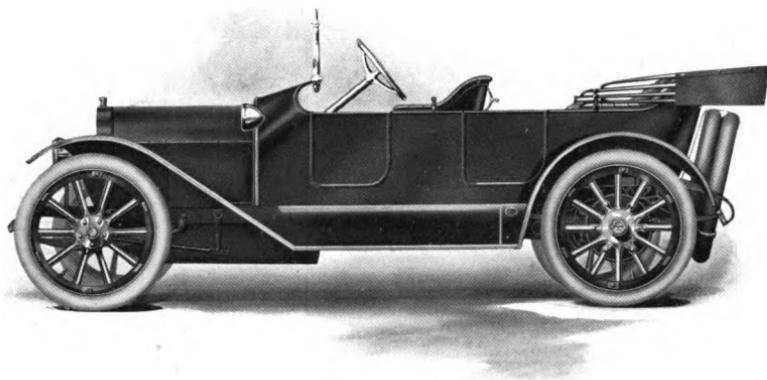


### MODEL: MOON "48" TORPEDO

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Four persons.	BORE . . . . .	4 $\frac{1}{2}$ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5 inches.
WHEELBASE . . . . .	121 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 inches.	ELECTRIC SOURCE . . . . .	High tension magneto and dry batteries.
REAR . . . . .	36 x 4 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 32.4.	GEAR CHANGES . . . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER . . . . .	Left side drive and center control.
ARRANGED . . . . .	Vertically under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

PULLMAN  
MOTOR CAR  
COMPANY  
YORK, PA.

Price . . . . \$1675  
Roadster . . . . 1675

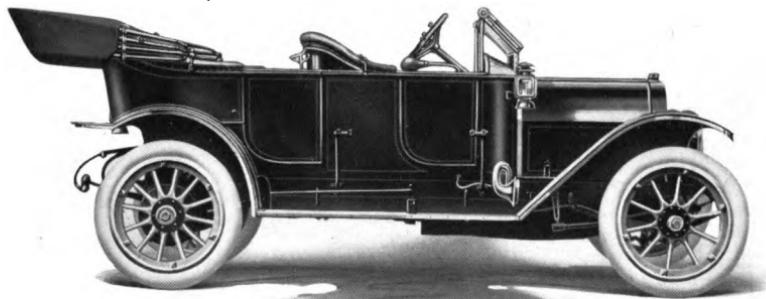

**MODEL: PULLMAN 4-36 TOURING CAR**


COLOR . . . .	Blue with white stripes; or body, blue; wheels, gray.	ARRANGED . . . .	Vertically, under hood.
SEATING CAPACITY .	Five persons.	CAST . . . .	In pairs.
CLUTCH . . . .	Cone.	BORE . . . .	4 $\frac{1}{2}$ inches.
WHEELBASE . . . .	118 inches.	STROKE . . . .	5 inches.
GAUGE . . . .	56 inches.	COOLING . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . .	Cellular.
FRONT . . . .	34 x 4 inches.	IGNITION . . . .	Jump spark.
REAR . . . .	34 x 4 inches.	ELECTRIC SOURCE . . . .	High tension magneto and dry batteries.
Brake Systems . . .	Contracting and expanding on both rear wheels.	DRIVE . . . .	Shaft.
HORSE-POWER . . .	(A. L. A. M. rating) 26.4.	TRANSMISSION . . . .	Selective sliding gear.
CYLINDERS . . . .	Four.	GEAR CHANGES . . . .	Three forward, one reverse.
POSITION OF DRIVER Right side drive and right hand control.			

Price includes top, top hood, prestolite tank, windshield, speedometer and demountable rims.

PRINTED IN U.S.A. BY THE PULLMAN MOTOR CAR COMPANY, YORK, PA.

PULLMAN  
MOTOR CAR  
COMPANY  
YORK, PA.

Price . . . . . \$2150

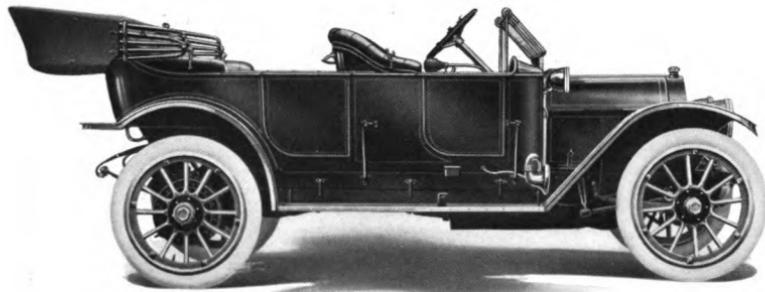


**MODEL: PULLMAN 4-44 TOURING CAR**

COLOR . . . . .	Blue with white stripes; or body, blue; wheels, gray.	ARRANGED . . . . .	Vertically, under hood.
SEATING CAPACITY .	Five persons.	CAST . . . . .	In pairs.
CLUTCH . . . . .	Cone.	BORE . . . . .	4 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	122 inches.	STROKE . . . . .	5 $\frac{1}{2}$ inches.
GAUGE . . . . .	56 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Cellular.
FRONT . . . . .	36 x 4 inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	36 x 4 inches.	ELECTRIC SOURCE .	High tension magneto and dry batteries.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels	DRIVE . . . . .	Shaft.
HORSE-POWER . . .	(A. L. A. M. rating) 32.4.	TRANSMISSION . . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . .	Four forward, one reverse.

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

P U L L M A N  
M O T O R C A R  
C O M P A N Y  
Y O R K , P A

Price . . . . . \$2750

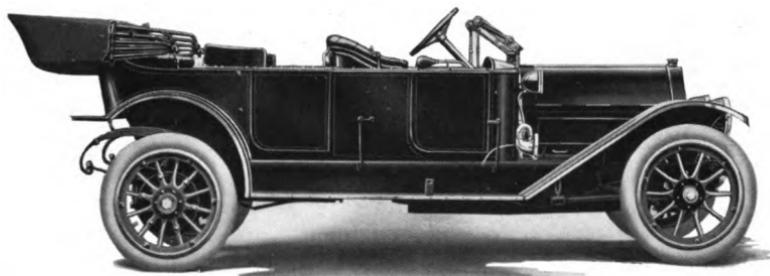


**MODEL: PULLMAN 6-66 TOURING CAR**

COLOR . . . . .	Blue with white stripes; or body, blue; wheels, gray.	ARRANGED . . . . .	Vertically, under hood.
SEATING CAPACITY .	Seven persons.	CAST . . . . .	In pairs.
CLUTCH . . . . .	Cone.	BORE . . . . .	4 $\frac{1}{2}$ inches.
WHEELBASE . . . . .	138 inches.	STROKE . . . . .	5 $\frac{1}{4}$ inches.
GAUGE . . . . .	56 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Cellular.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE .	High tension magneto and dry batteries.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . . .	(A. L. A. M. rating) 48.6.	TRANSMISSION . . . . .	Selective sliding gear.
CYLINDERS . . . . .	Six.	GEAR CHANGES . . . . .	Four forward, one reverse.
POSITION OF DRIVER Right side drive and right hand control.			

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

THE GARFORD  
C O M P A N Y  
ELYRIA, OHIO

Price . . . . . \$2750

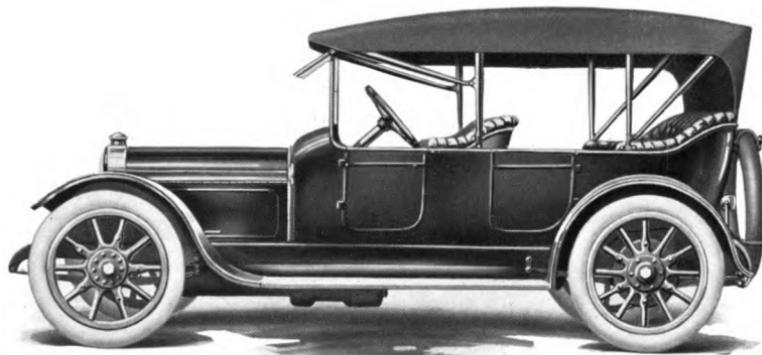

**MODEL: GARFORD TOURING CAR G-15**


COLOR . . . . .	Brewster green	CAST . . . . .	En bloc.
SEATING CAPACITY . . . . .	Five persons.	BORE . . . . .	3 $\frac{3}{4}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	6 inches.
WHEELBASE . . . . .	128 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE . . . . .	Storage battery charged by motor generator.
REAR . . . . .	36 x 4 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
Brake Systems . . . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 33.7.	GEAR CHANGES . . . . .	Four forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER . . . . .	Left side drive and center control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

PRINTED IN U.S.A. BY THE GARFORD COMPANY, ELYRIA, OHIO

THE GARFORD  
C O M P A N Y  
ELYRIA, OHIO

Price . . . . . \$4500  
Seven-Passenger Touring Car 4500

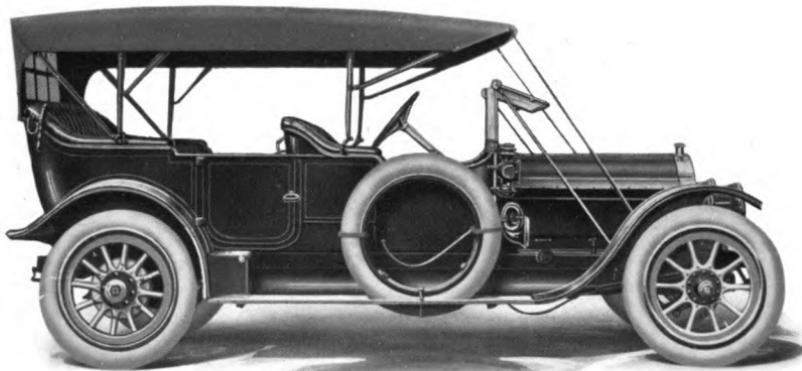


**MODEL: GARFORD TOURING CAR G-14**

COLOR . . . . .	Optional.	CAST . . . . .	En bloc.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4 $\frac{1}{4}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	135 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
REAR . . . . .	37 x 5 inches.	DRIVE . . . . .	Shaft.
		TRANSMISSION . .	Selective gear.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	GEAR CHANGES . .	Four forward, one reverse.
HORSE-POWER . . .	(A. L. A. M. rating) 43.8.	POSITION OF DRIVER	Right side drive and right hand control
CYLINDERS . . . . .	Six.		
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, windshield, speedometer and demountable rims.

**THE GARFORD  
C O M P A N Y  
ELYRIA, OHIO**

Price . . . . .	\$6000
Seven-Passenger Limousine . .	5600
Seven-Passenger Landaulet . .	5750

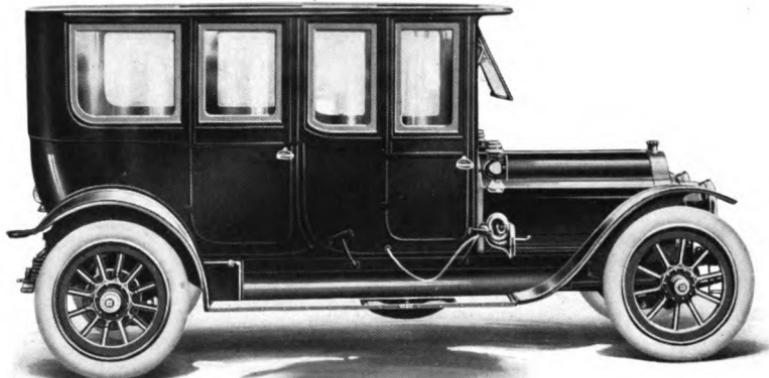


**MODEL: GARFORD BERLIN LIMOUSINE G-14**

COLOR . . . . .	Optional.	CAST . . . . .	En bloc.
SEATING CAPACITY . . . . .	Seven persons.	BORE . . . . .	4 $\frac{1}{4}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	135 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
REAR . . . . .	37 x 5 inches.	DRIVE . . . . .	Shaft.
Brake Systems . . . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 43.8.	GEAR CHANGES . . . . .	Four forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER . . . . .	Right side drive and right hand control
ARRANGED . . . . .	Vertically, under hood.		

Price includes electric lighting, speedometer and demountable rims.

THE GARFORD  
C O M P A N Y  
ELYRIA, OHIO

Price . . . . . \$4000  
Five-Passenger Landaulet . . . 4100

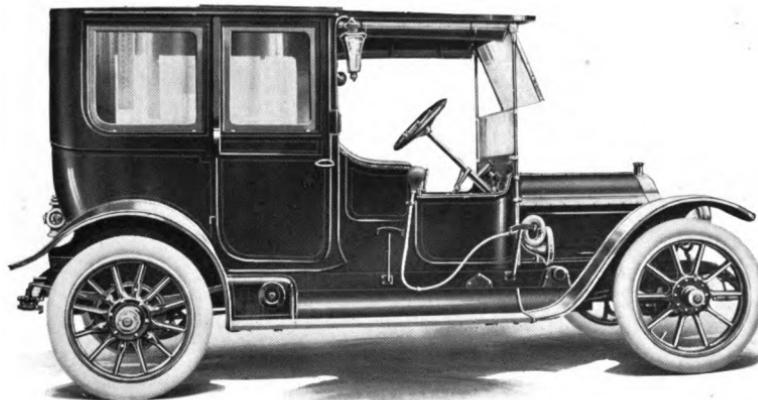

**MODEL: GARFORD LIMOUSINE G-12**


COLOR . . . . .	Optional.	CAST . . . . .	En bloc.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4 $\frac{1}{4}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	118 inches.	COOLING . . . . .	Water
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:			
FRONT . . . . .	34 x 4 $\frac{1}{2}$ inches.	IGNITION . . . . .	Make-and-break.
REAR . . . . .	34 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE .	Low tension magneto and storage battery.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . .	(A. L. A. M. rating) 28.9.	TRANSMISSION . . .	Selective gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . .	Four forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER	Right side drive and right hand control.

Price includes top, top hood, prestolite tank, windshield, speedometer and demountable rims.

THE GARFORD COMPANY ELYRIA, OHIO

**LOZIER MOTOR  
C O M P A N Y  
DETROIT, MICH.**

Price . . . . .	\$5000
Five-Passenger Lakewood Torpedo . . .	5000
Five-Passenger Larchmont Touring . . .	5000
Five-Passenger Briarcliff Toy Tonneau . .	5000
Three-Passenger Meadowbrook Runabout . .	5000
Seven-Passenger Knickerbocker Berlin . .	6500

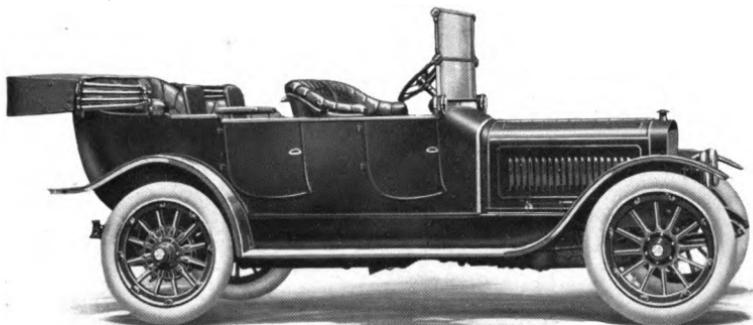


**MODEL: LOZIER "RIVERSIDE" TYPE 72**

COLOR . . . . .	Lozier blue.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Seven persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5½ inches.
WHEELBASE . . . . .	131 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:			
FRONT . . . . .	36 x 4 ½ inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	37 x 5 inches.	ELECTRIC SOURCE . . . . .	Dynamo and storage battery.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . . .	(A. L. A. M. rating) 51.6.	TRANSMISSION . . . . .	Selective sliding gear.
CYLINDERS . . . . .	Six.	GEAR CHANGES . . . . .	Four forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER	Left side drive and right hand control.

Price includes top, top hood, electric lighting, windshield, speedometer and demountable rims.

**LOZIER MOTOR  
C O M P A N Y**  
**DETROIT, MICH.**

Price . . . . .	\$3250
Two-Passenger Fairmount Runabout . . .	3250
Three-Passenger Touraine Coupe . . . .	3850
Five-Passenger Metropolitan Enclosed	
Limousine . . . . .	4450
Six-Passenger Coronado Limousine . . .	4450

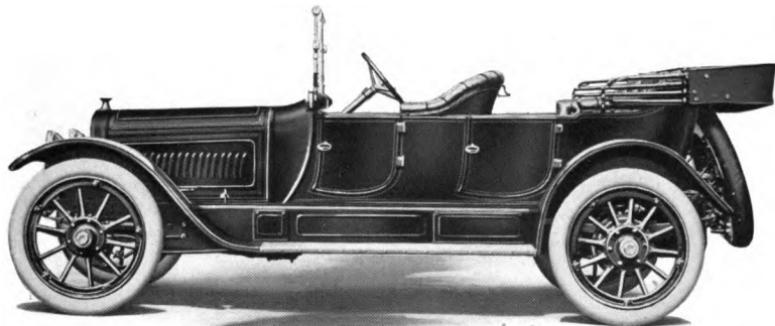


**MODEL: LOZIER "MONTCLAIR" TYPE 77**

COLOR . . . . .	Lozier blue.	CAST . . . . .	In blocks of three.
SEATING CAPACITY .	Five persons.	BORE . . . . .	3½ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5½ inches.
WHEELBASE . . . . .	127 ½ inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:			
FRONT . . . . .	36 x 4 ½ inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	36 x 4 ½ inches.	ELECTRIC SOURCE .	Dynamo and storage battery.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . .	(A. L. A. M. rating) 31.6.	TRANSMISSION . .	Selective sliding gear.
CYLINDERS . . . . .	Six	GEAR CHANGES . .	Three forward, one reverse
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER	Left side drive and right hand control.

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

PAIGE - DETROIT  
MOTOR CAR  
COMPANY  
DETROIT, MICH.

Price . . . . .	\$1275
Roadster . . . . .	1275
Speedster . . . . .	1275

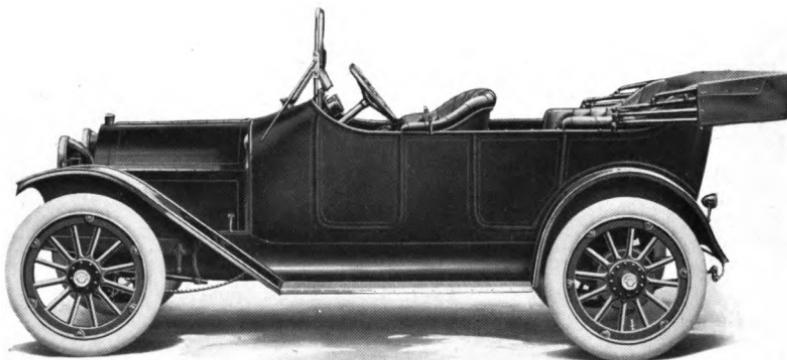


**[ MODEL: "PAIGE" FIVE-PASSENGER TOURING CAR 36 ]**

COLOR . . . . .	Body, blue; chassis, black.	CAST . . . . .	En bloc.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4 inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5 inches.
WHEELBASE . . . . .	116 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Vertical tube.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	34 x 4 inches.	ELECTRIC SOURCE .	High tension magneto
REAR . . . . .	34 x 4 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 25.6.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Left side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

**PAIGE-DETROIT  
MOTOR CAR  
COMPANY**  
**DETROIT, MICH.**

Price . . . . .	\$950
Roadster . . . . .	950
Speedster . . . . .	950

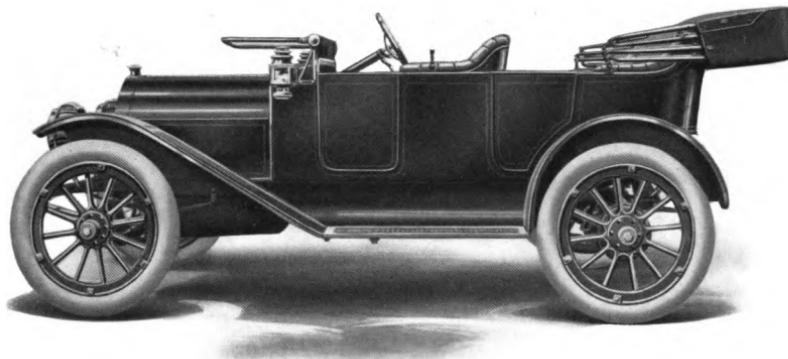

**MODEL: "PAIGE" FIVE-PASSENGER TOURING CAR 25**


COLOR . . . . .	Body, blue; chassis, black.	CAST . . . . .	En bloc.
SEATING CAPACITY .	Five persons.	BORE . . . . .	[3½ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	4 inches.
WHEELBASE . . . . .	110 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Vertical tube.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	32 x 3½ inches.	ELECTRIC SOURCE . . . . .	High tension magneto
REAR . . . . .	32 x 3½ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 22.5.	GEAR CHANGES . . . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, prestolite tank, windshield, speedometer and demountable rims.

**A M E R I C A N  
L O C O M O T I V E  
C O M P A N Y**

**1886 BROADWAY  
N E W Y O R K**


Price . . . . .	\$6000
Colonial Limousine . . . . .	6750
Berline Limousine . . . . .	7250
Five-Passenger . . . . .	6000

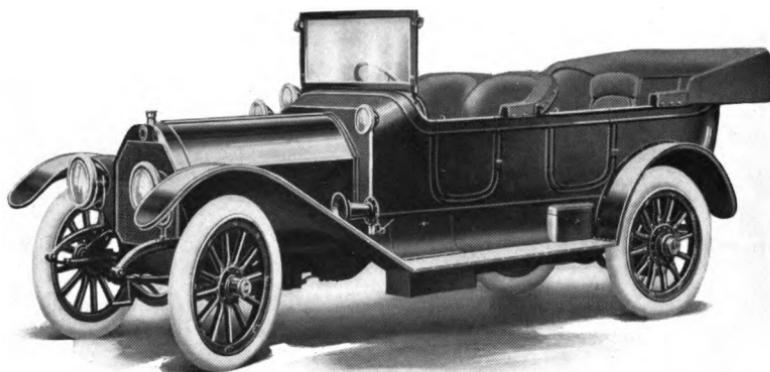

**MODEL: ALCO 11/60**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Seven persons.	BORE . . . . .	4 $\frac{3}{4}$ inches.
CLUTCH . . . . .	Dry plate.	STROKE . . . . .	5 $\frac{1}{2}$ inches.
WHEELBASE . . . . .	133 $\frac{1}{4}$ inches.	COOLING . . . . .	Water.
GAUGE . . . . .	55 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
REAR . . . . .	37 x 5 inches.	DRIVE . . . . .	Shaft.
Brake Systems . . . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 54.1.	GEAR CHANGES . . . . .	Four forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, windshield, speedometer and demountable rims.

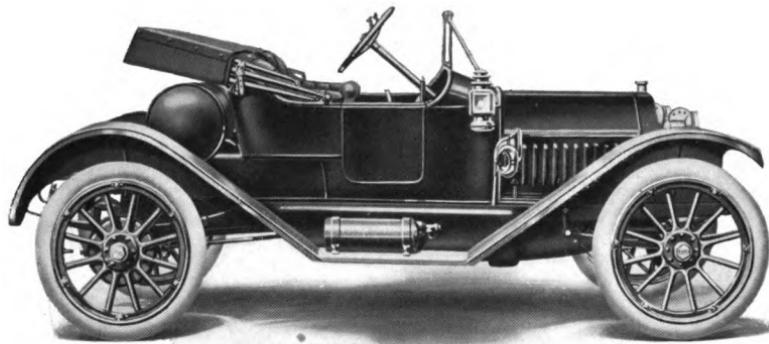


MODEL: BUICK 24

COLOR . . . . .	Body, gray or wine; running gear, blue-black.	ARRANGED . . . . .	Vertically, under hood.
SEATING CAPACITY .	Two persons.	CAST . . . . .	In pairs.
CLUTCH . . . . .	Cone.	BORE . . . . .	3 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	105 inches.	STROKE . . . . .	3 $\frac{1}{4}$ inches.
GAUGE . . . . .	56 or 60 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Vertical tube.
FRONT . . . . .	32 x 3 $\frac{1}{2}$ inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	32 x 3 $\frac{1}{2}$ inches.	ELECTRIC SOURCE .	High tension magneto and dry batteries.
BRAKE SYSTEMS . .	Contracting and ex-panding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . .	(A. L. A. M. rating) 22.5.	TRANSMISSION . . .	Sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . .	Three forward, one reverse.
Price includes top, top hood, prestolite tank, self-starter, windshield and demountable rims.			

Digitized by Google

B U I C K  
M O T O R  
C O M P A N Y  
F L I N T , M I C H .

Price. . . . . \$1050

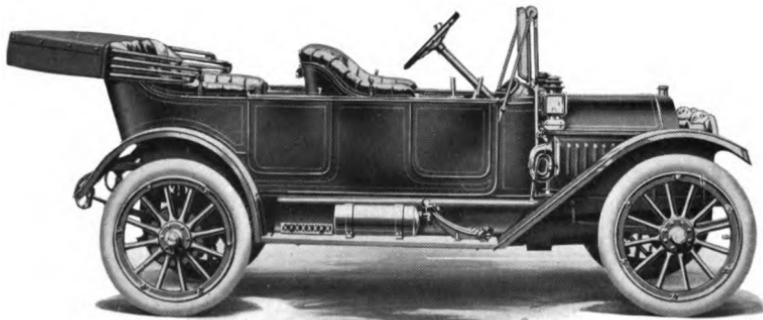


**MODEL: BUICK 25**

COLOR . . . . .	Body, gray or wine; running gear, blue-black.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Five persons.	BORE . . . . .	3 $\frac{3}{4}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	3 $\frac{3}{4}$ inches.
WHEELBASE . . . . .	105 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Vertical tube.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	32 x 3 $\frac{1}{2}$ inches.	ELECTRIC SOURCE .	High tension magneto and dry batteries.
REAR . . . . .	32 x 3 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 22.5.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, prestolite tank, self-starter, windshield and demountable rims.

B U I C K  
M O T O R  
C O M P A N Y  
F L I N T , M I C H .

P r i c e . . . . . \$ 1125

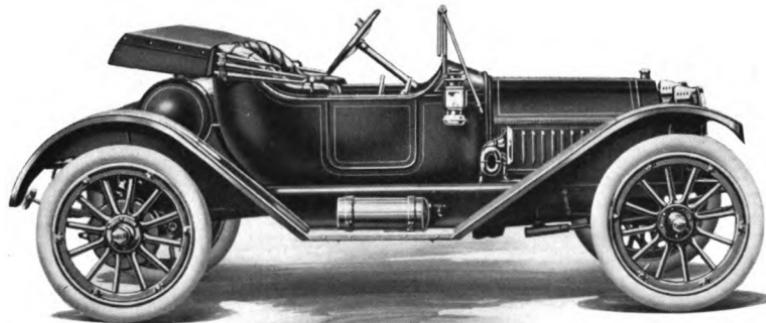


**MODEL: BUICK 30**

COLOR . . . . .	Gray or blue.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Two persons.	BORE . . . . .	4 inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	4 inches.
WHEELBASE . . . . .	108 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Vertical tube and plate.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	34 x 3½ inches.	ELECTRIC SOURCE . . .	High tension magneto and dry batteries.
REAR . . . . .	34 x 3½ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . .	Sliding gear.
HORSE-POWER . . . .	(A. L. A. M. rating) 25.6.	GEAR CHANGES . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically under hood.		

Price includes top, top hood, prestolite tank, electric side and tail lights, self-starter, windshield and demountable rims.

B U I C K  
M O T O R  
C O M P A N Y  
F L I N T , M I C H .

Price. . . . . \$1285

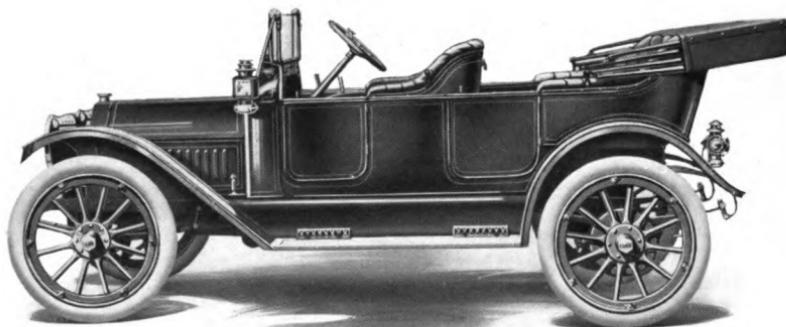


**MODEL: BUICK 31**

COLOR . . . . .	Body, gray or blue-black; running gear, blue-black.	ARRANGED . . . . .	Vertically, under hood.
SEATING CAPACITY .	Five persons.	CAST . . . . .	In pairs.
CLUTCH . . . . .	Cone.	BORE . . . . .	4 inches.
WHEELBASE . . . . .	108 inches.	STROKE . . . . .	4 inches.
GAUGE . . . . .	56 or 60 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Vertical tube.
FRONT . . . . .	34 x 4 inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	34 x 4 inches.	ELECTRIC SOURCE . . . . .	High tension magneto and dry batteries.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . . .	(A. L. A. M. rating) 25.6.	TRANSMISSION . . . . .	Sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . . . .	Three forward, one reverse.
POSITION OF DRIVER Right side drive and right hand control.			

Price includes top, top hood, prestolite tank, electric side and tail lights, self-starter, windshield and demountable rims.

B U I C K  
M O T O R  
C O M P A N Y  
F L I N T , M I C H .

Price . . . . . \$1650

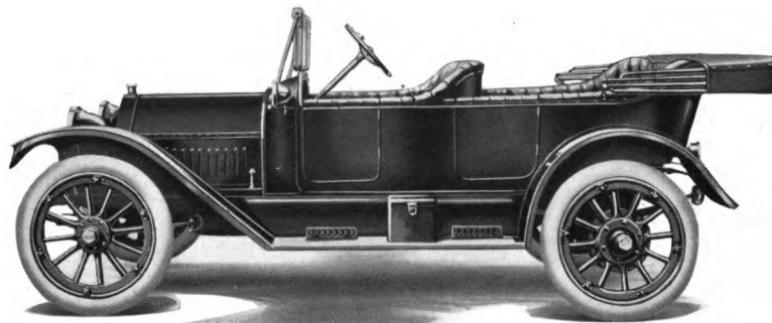


**MODEL: BUICK 40**

COLOR . . . . .	Body, gray or blue-black; running gear, black.	CAST. . . . .	En bloc.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4 $\frac{1}{4}$ inches.
CLUTCH. . . . .	Cone.	STROKE . . . . .	4 $\frac{1}{2}$ inches.
WHEELBASE . . . . .	115 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Vertical tube and plate.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 inches.	ELECTRIC SOURCE .	High tension magneto and dry batteries.
REAR. . . . .	36 x 4 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . .	Expanding on both rear wheels.	TRANSMISSION . .	Sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 28.9.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, self-starter, windshield and demountable rims.

O L D S  
M O T O R  
W O R K S  
L A N S I N G  
M I C H I G A N

Price . . . . . \$2500

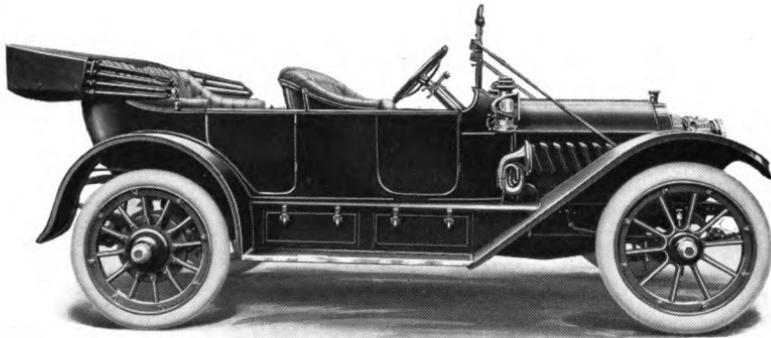


**MODEL: OLDSMOBILE DEFENDER TOURING CAR**

COLOR . . . . .	Brewster green, blue jay blue or warship gray.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Five persons.	BORE . . . . .	4 inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{1}{2}$ inches.
WHEELBASE . . . . .	116 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS : FRONT . . . . .	36 x 4 inches.	IGNITION . . . . .	Make-and-break.
REAR . . . . .	36 x 4 inches.	ELECTRIC SOURCE . . . . .	High tension magneto and dry batteries.
BRAKE SYSTEMS . . . . .	Contracting and ex- panding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . . .	(A. L. A. M. rating) 25.6.	TRANSMISSION . . . . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . . . .	Four forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.

Price includes top, top hood, prestolite tank, electric lighting, windshield, speedometer and  
demountable rims.

O L D S  
M O T O R  
W O R K S  
  
L A N S I N G  
M I C H I G A N

Price . . . . .	\$3350
Four-Passenger . . . . .	3200
Five-Passenger . . . . .	3200

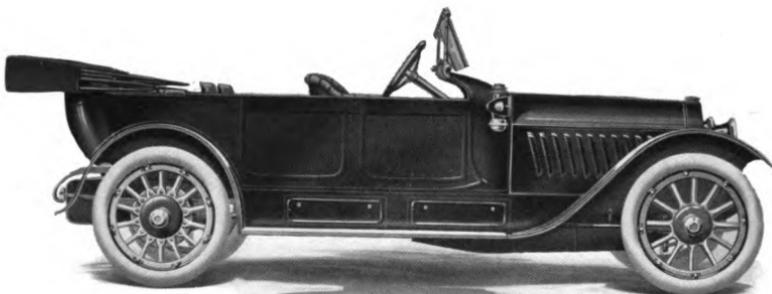


**MODEL: OLDSMOBILE "S3" SEVEN-PASSENGER TOURING CAR**

COLOR . . . . .	Brewster green, blue jay blue or black.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Seven persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	4¾ inches.
WHEELBASE . . . . .	135 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS :		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4½ inches.	ELECTRIC SOURCE . . . . .	High tension magneto.
REAR . . . . .	36 x 4½ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . . . .	Internal expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 40.9.	GEAR CHANGES . . . . .	Three forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric-lighting, self-starter, windshield, speedometer and demountable rims.

**KNOX AUTOMOBILE  
C O M P A N Y  
SPRINGFIELD, MASS.**

Price . . . . .	\$4350
Seven-Passenger Torpedo . . . . .	4350
Raceabout . . . . .	4350
Limousine . . . . .	5350
Berline . . . . .	5350
Landaulet . . . . .	5400

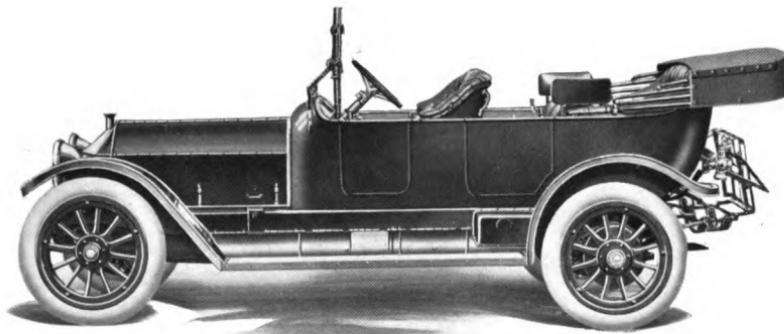


**MODEL: KNOX 16-SIX TOURING CAR-TYPE C**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Six persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Plate.	STROKE . . . . .	5½ inches.
WHEELBASE . . . . .	130 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:			
FRONT . . . . .	38 x 5 inches.	IGNITION . . . . .	Jump spark.
REAR. . . . .	38 x 5 inches.	ELECTRIC SOURCE . . . . .	High tension magneto and dry batteries.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . . .	(A. L. A. M. rating) 46.	TRANSMISSION . . . . .	Selective sliding gear.
CYLINDERS . . . . .	Six.	GEAR CHANGES . . . . .	Three forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER . . . . .	Optional.

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

THE WHITE  
COMPANY  
CLEVELAND, OHIO

Price . . . . . \$5000  
Five-Passenger Touring Car . . . . . 5000  
Roadster . . . . . 4800

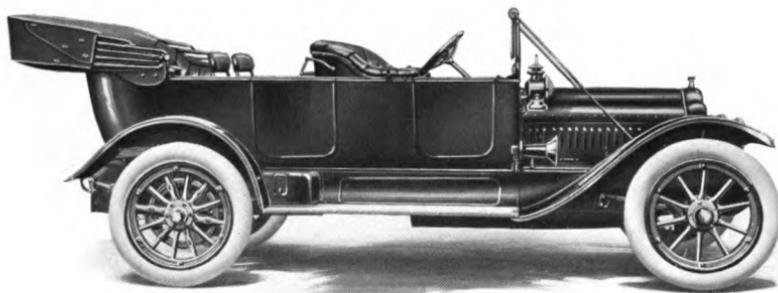


MODEL: WHITE "60" SEVEN-PASSENGER TOURING CAR

COLOR . . . . .	Dark green, maroon, Cleveland gray or battleship gray.	CAST . . . . .	En bloc.
SEATING CAPACITY . . . . .	Seven persons.	BORE . . . . .	4 $\frac{1}{4}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	132 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	37 x 5 inches	ELECTRIC SOURCE . . . . .	High tension mag- neto.
REAR . . . . .	37 x 5 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . . . .	Contracting and ex- panding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	60.	GEAR CHANGES . . . . .	Four forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER . . . . .	Left side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes electric lighting, electric self-starter and demountable rims.

THE WHITE  
COMPANY  
CLEVELAND, OHIO

Price . . . . . \$6300  
Coupe. . . . . 5400

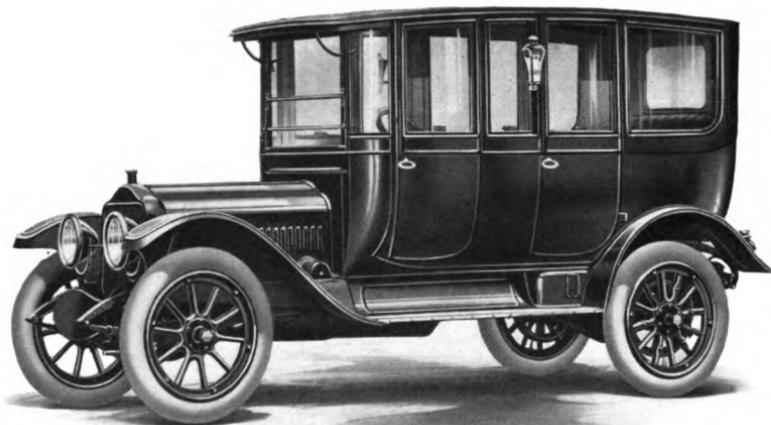


**MODEL: WHITE "60" BERLINE LIMOUSINE**

COLOR . . . . .	Dark green, maroon, Cleveland gray, or blue.	CAST . . . . .	En bloc.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	4 $\frac{1}{4}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{3}{4}$ inches.
WHEELBASE . . . . .	132 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	37 x 5 inches.	ELECTRIC SOURCE .	High tension magneto.
REAR . . . . .	37 x 5 inches.	DRIVE . . . . .	Shaft.
		TRANSMISSION .	Selective sliding gear.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	GEAR CHANGES .	Four forward, one reverse.
HORSE-POWER . . . .	60.	POSITION OF DRIVER	Left side drive and right hand control.
CYLINDERS . . . . .	Six.		
ARRANGED . . . . .	Vertically, under hood.		

Price includes electric lighting, electric self-starter and demountable rims.

**THE WHITE  
COMPANY  
CLEVELAND, OHIO**

Price . . . . .	\$3500
Five-Passenger Touring Car . . . . .	3300
Berline Limousine . . . . .	5000

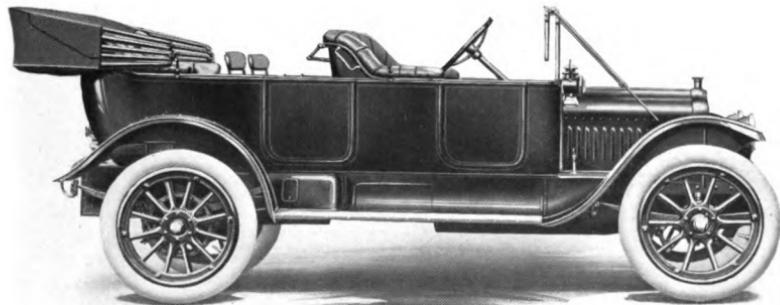

**MODEL: WHITE "40" SEVEN-PASSENGER TOURING CAR**

COLOR . . . . .	Dark green, maroon, Cleveland gray or battleship gray.	CAST . . . . .	En bloc.
SEATING CAPACITY . . . . .	Seven persons.	BORE . . . . .	4 $\frac{1}{4}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	120 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE . . . . .	High tension magneto.
REAR. . . . .	36 x 4 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	40.	GEAR CHANGES . . . . .	Four forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER . . . . .	Left side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes electric lighting, electric self-starter and demountable rims.

THE WHITE  
COMPANY  
CLEVELAND, OHIO

Price . . . . . \$4100  
Roadster . . . . . 3300




**MODEL: WHITE "40" COUPE**

COLOR . . . . .	Dark green, maroon, Cleveland gray or battleship gray.	CAST . . . . .	En bloc.
SEATING CAPACITY .	Three persons.	BORE . . . . .	4 $\frac{1}{4}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{3}{4}$ inches.
WHEELBASE . . . . .	120 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE	High tension mag-
REAR . . . . .	36 x 4 $\frac{1}{2}$ inches.		neto.
BRAKE SYSTEMS . .	Contracting and ex- panding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . .	40.	TRANSMISSION . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . .	Four forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER	Left side drive and right hand control.

Price includes electric lighting, electric self-starter and demountable rims.

THE WHITE  
C O M P A N Y  
CLEVELAND, OHIO

Price . . . . .	\$2500
Roadster . . . . .	2500
Coupe . . . . .	3250

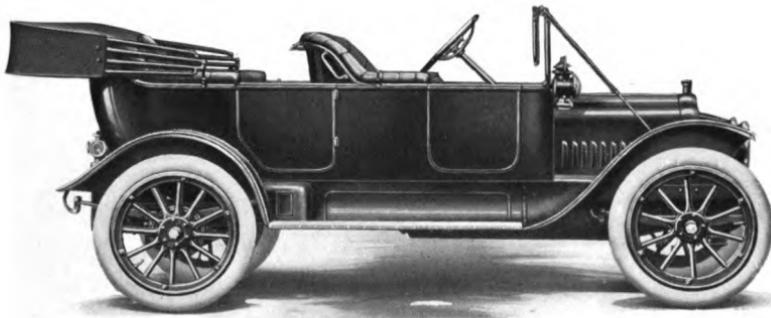

**MODEL: WHITE "30" TOURING CAR**


COLOR . . . . .	Dark green, maroon, Cleveland gray or battleship gray.	CAST . . . . .	En bloc.
SEATING CAPACITY .	Five persons.	BORE . . . . .	3 $\frac{3}{4}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{1}{2}$ inches.
WHEELBASE . . . . .	110 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	34 x 4 inches.	ELECTRIC SOURCE .	High tension magneto.
REAR . . . . .	34 x 4 inches.	DRIVE . . . . .	Shaft.
Brake Systems . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . .	Selective sliding gear.
HORSE-POWER . . . . .	30.	GEAR CHANGES . . .	Four forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER .	Left side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes electric lighting, electric self-starter and demountable rims.

THE WHITE COMPANY, CLEVELAND, OHIO

H U D S O N  
M O T O R C A R  
C O M P A N Y  
DETROIT, MICH.

Price . . . . .	\$1875
Torpedo . . . . .	1875
Roadster . . . . .	1875
Limousine . . . . .	3250
Coupe . . . . .	2350

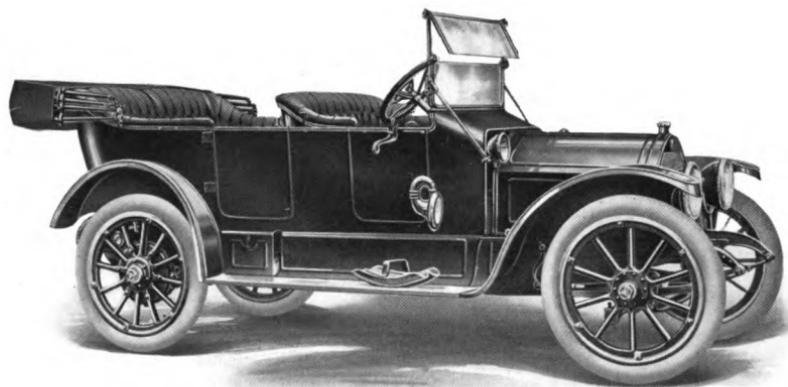


**MODEL: HUDSON "37" TOURING CAR**

COLOR . . . . .	Body, Richelieu blue or pearl gray; running gear, blue-black.	CAST . . . . .	En bloc.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5¼ inches.
WHEELBASE . . . . .	118 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Cellular.
TIRES DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	34 x 4 inches	ELECTRIC SOURCE .	Delco system.
REAR . . . . .	34 x 4 inches	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels	TRANSMISSION . . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 27.2.	GEAR CHANGES . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

H U D S O N  
MOTOR CAR  
C O M P A N Y  
DETROIT, MICH.

Price . . . . .	\$2450
Torpedo . . . . .	2450
Roadster . . . . .	2450
Limousine . . . . .	3750
Coupe . . . . .	2950
Seven-Passenger Touring Car	2600

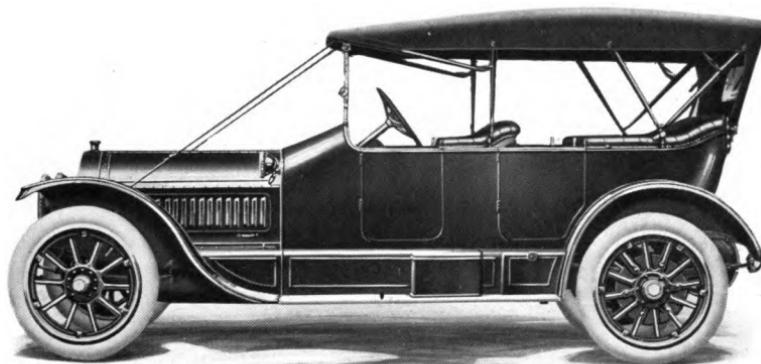


**MODEL: HUDSON "54" TOURING CAR**

COLOR . . . . .	Body, Richelieu blue or pearl gray; running gear, blue-black.	CAST . . . . .	In blocks of three.
SEATING CAPACITY . . . . .	Five persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5¼ inches.
WHEELBASE . . . . .	127 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:			
FRONT . . . . .	36 x 4½ inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	36 x 4½ inches.	ELECTRIC SOURCE . . . . .	Delco System.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . . .	(A. L. A. M. rating) 40.9.	TRANSMISSION . . . . .	Selective sliding gear.
CYLINDERS . . . . .	Six.	GEAR CHANGES . . . . .	Three forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

NORDYKE & MARMON  
C O M P A N Y  
INDIANAPOLIS, IND.

Price . . . . .	\$3000
Four-Passenger . . . . .	3000
Two-Passenger . . . . .	2900
Speedster . . . . .	2850
Seven-Passenger Limousine . . . . .	4000
Seven-Passenger Landaulet . . . . .	4100

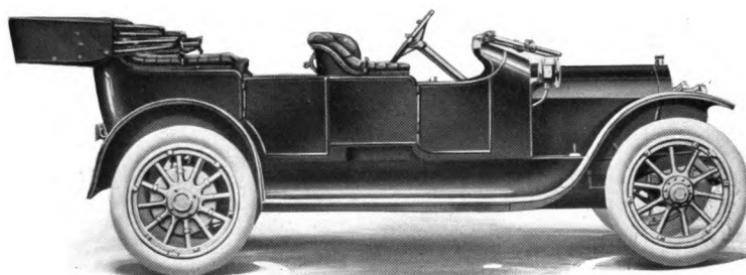


**MODEL: MARMON "THIRTY-TWO"**

COLOR . . . . .	Body, blue-black; running gear, olive green.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Five persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 inches.
WHEELBASE . . . . .	120 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56½ inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	35 x 4 ½ inches.	ELECTRIC SOURCE . . . . .	High tension magneto and dry batteries.
REAR . . . . .	35 x 4 ½ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . . . .	Internal expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 32.4.	GEAR CHANGES . . . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER . . . . .	Left side drive and center control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

**NORDYKE & MARMON  
C O M P A N Y  
INDIANAPOLIS, IND.**

Price . . . . .	\$5000
Five-Passenger . . . . .	5000
Four-Passenger . . . . .	5000
Two-Passenger . . . . .	5000
Seven-Passenger Limousine . .	6250
Seven-Passenger Landaulet . .	6350

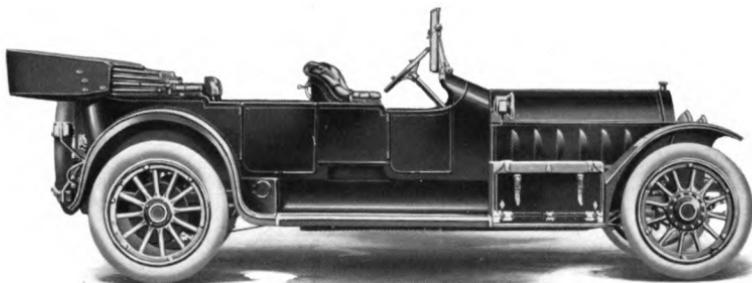


**MODEL: MARMON "SIX"**

COLOR . . . . .	Blue-black.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Dry multiple disc.	STROKE . . . . .	6 inches.
WHEELBASE . . . . .	145 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56½ inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4½ inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
REAR . . . . .	37 x 5 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Internal expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 48.6.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER	Left side drive and center control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

H A Y N E S  
A U T O M O B I L E  
C O M P A N Y  
KOKOMO, IND.

Price . . . . .	\$2250
Four-Passenger Touring Car .	2250
Two-Passenger Roadster . .	2250
Three-Passenger Coupe . .	2750
Seven-Passenger Limousine .	3400
Seven-Passenger Berlin Limou- sine . . . . .	3500

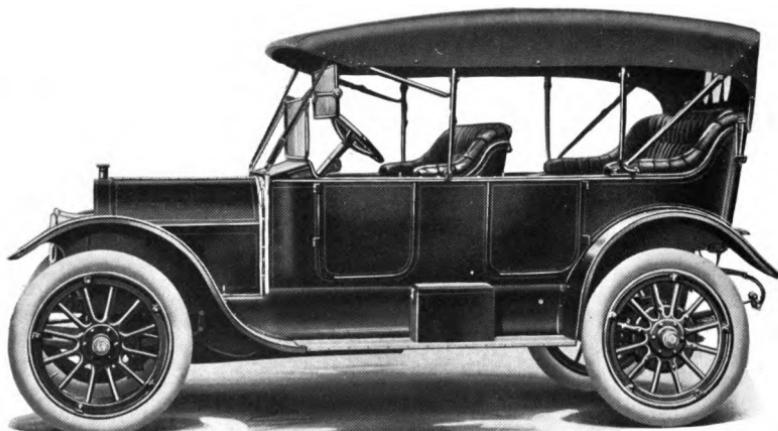


**MODEL: HAYNES FIVE-PASSENGER TOURING CAR 22**

COLOR . . . . .	Black, brown or gray.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4 $\frac{1}{2}$ inches.
CLUTCH . . . . .	Contracting band.	STROKE . . . . .	5 $\frac{1}{2}$ inches
WHEELBASE . . . . .	120 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
REAR . . . . .	36 x 4 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS .		TRANSMISSION .	Selective sliding gear.
Contracting and ex- panding on both rear wheels.		GEAR CHANGES .	Three forward, one reverse.
HORSE-POWER . . .		POSITION OF DRIVER	Right side drive and right hand control.
(A. L. A. M. rating) 32.4.			
CYLINDERS . . . . .			
Four.			
ARRANGED . . . . .			
Vertically, under hood.			

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

H A Y N E S  
A U T O M O B I L E  
C O M P A N Y  
KOKOMO, IND.

Price . . . . .	\$3500
Four-Passenger Touring Car .	2250
Five-Passenger Touring Car .	2250
Two-Passenger Roadster . .	2250
Three-Passenger Coupe . . .	2750

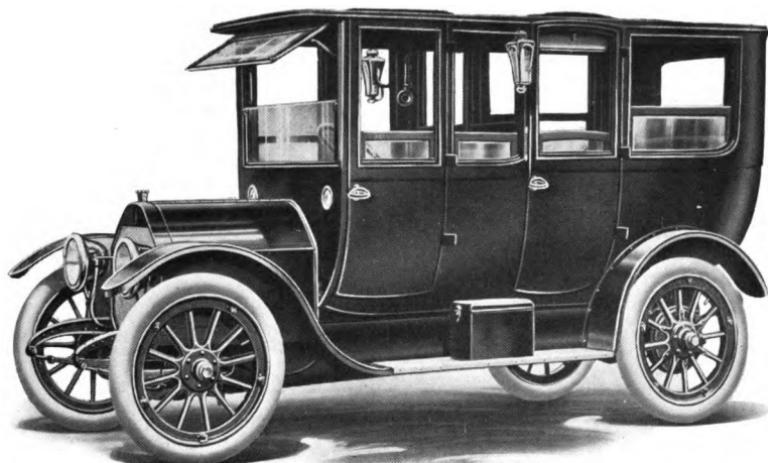


**MODEL: HAYNES LIMOUSINE**

COLOR . . . . .	Black.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	4 1/2 inches.
CLUTCH . . . . .	Contracting Band.	STROKE . . . . .	5 1/2 inches.
WHEELBASE . . . . .	120 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 1/2 inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
REAR . . . . .	36 x 4 1/2 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 32.4.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes electric lighting, electric self-starter, speedometer and demountable rims.

H. H. FRANKLIN  
MFG. COMPANY  
SYRACUSE, N. Y.

Price . . . . . \$3500  
Torpedo . . . . . 3500

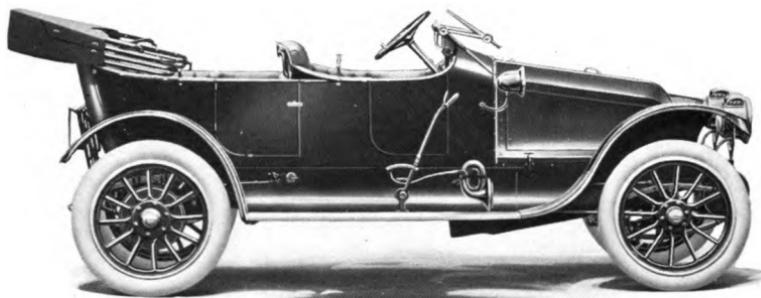


#### MODEL: FRANKLIN D TORPEDO-PHAETON

COLOR . . . . .	Blue.	CAST . . . . .	Separately.
SEATING CAPACITY . . . . .	Four persons.	BORE . . . . .	4 inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	4 inches.
WHEELBASE . . . . .	123 inches.	COOLING . . . . .	Air.
GAUGE . . . . .	56 inches.	IGNITION . . . . .	Jump spark.
TIRE DIMENSIONS:		ELECTRIC SOURCE . . . . .	High tension magneto.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
REAR . . . . .	37 x 5 inches.	TRANSMISSION . . . . .	Selective sliding gear.
BRAKE SYSTEMS . . . . .	Contracting on rear wheels and transmission brake drums.	GEAR CHANGES . . . . .	Three forward, one reverse.
HORSE-POWER . . . . .	(A. L. A. M. rating) 38.4.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.
CYLINDERS . . . . .	Six.		
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

H. H. FRANKLIN  
MFG. COMPANY  
SYRACUSE, N. Y.

Price . . . . . \$2900  
Victoria Phaeton . . . . . 2900

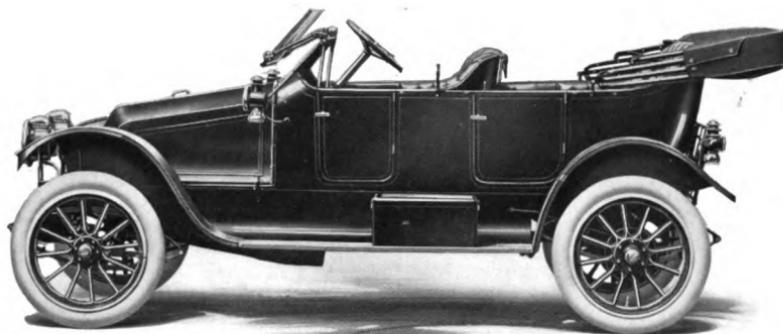


**MODEL: FRANKLIN M TOURING CAR**

COLOR . . . . .	Blue.	CAST . . . . .	Separately.
SEATING CAPACITY .	Five persons.	BORE . . . . .	3½ inches.
CLUTCH	Multiple disc.	STROKE . . . . .	4 inches.
WHEELBASE . . . .	116 inches.	COOLING . . . . .	Air.
GAUGE . . . . .	53½ inches.	IGNITION . . . . .	Jump spark.
TYRE DIMENSIONS:		ELECTRIC SOURCE .	High tension magneto.
FRONT . . . . .	34 x 4 1/2 inches.	DRIVE . . . . .	Shaft.
REAR . . . . .	34 x 4 1/2 inches.	TRANSMISSION . .	Selective sliding gear.
Brake Systems . .	Contracting on rear wheels and transmission brake drums.	GEAR CHANGES . .	Three forward, one reverse.
HORSE-POWER . . .	(A. L. A. M. rating) 31.6.	POSITION OF DRIVER	Right side drive and right hand control.
CYLINDERS . . . .	Six.		
ARRANGED . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

JAMES CUNNINGHAM  
SON & COMPANY  
ROCHESTER, NEW YORK

Price . . . . .	\$3500
Five-Passenger Phaeton . . .	3500
Four-Passenger Torpedo . . .	3500
Runabout . . . . .	3250

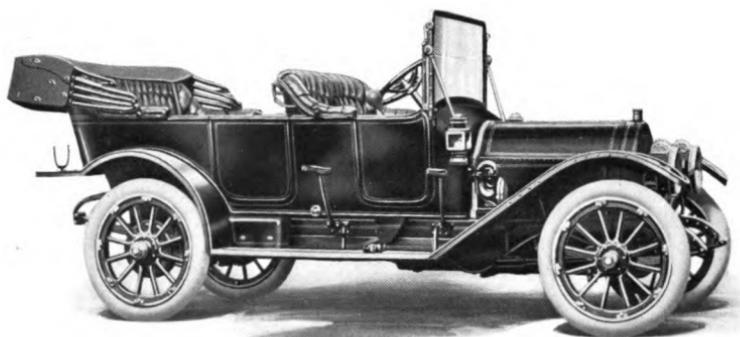


#### MODEL: M-CUNNINGHAM TOURING CAR

COLOR . . . . .	Optional	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Seven persons.	BORE . . . . .	4 $\frac{3}{4}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{1}{2}$ inches.
WHEELBASE . . . . .	124 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
REAR . . . . .	36 x 4 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
Brake Systems . . . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 36.1.	GEAR CHANGES . . . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER . . . . .	Left side drive and center control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

JAMES CUNNINGHAM  
SON & COMPANY  
ROCHESTER NEW YORK

Price . . . . .	\$4600
Landaulet . . . . .	4500
Limousine . . . . .	4500

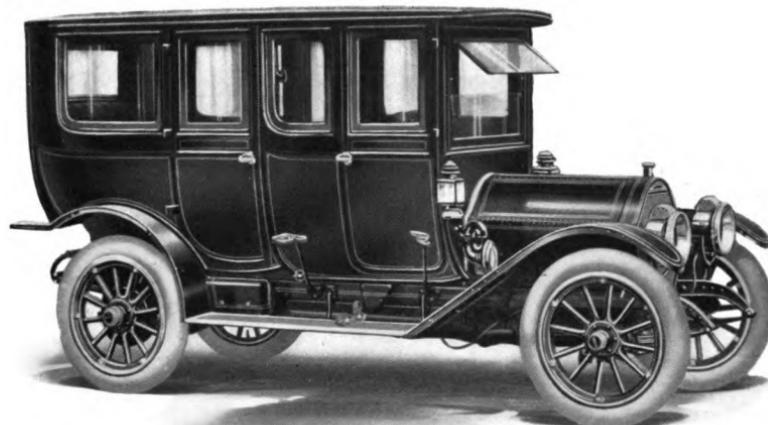


**MODEL: M-CUNNINGHAM BERLIN LIMOUSINE**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5¾ inches.
WHEELBASE . . . . .	124 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4½ inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
REAR . . . . .	36 x 4½ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 36.1.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Left side drive and center control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes electric lighting, self-starter, windshield, speedometer and demountable rims.

**CHALMERS  
M O T O R  
C O M P A N Y**  
**DETROIT, MICH.**

Price . . . . .	\$1950
Seven-Passenger Touring Car . . . . .	2150
Four-Passenger Torpedo . . . . .	1950
Roadster . . . . .	1950
Coupe . . . . .	2250
Limousine . . . . .	3250

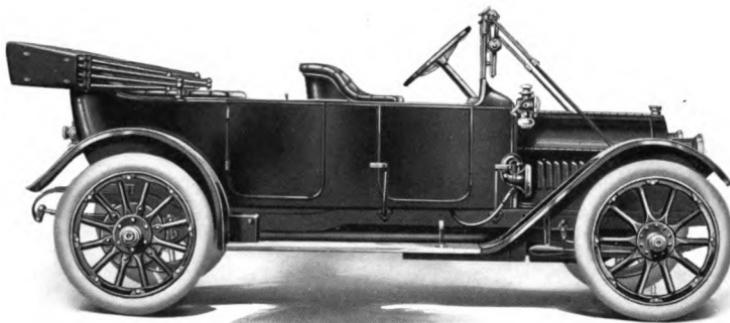


**MODEL: 17—CHALMERS "THIRTY-SIX" TOURING CAR**

COLOR . . . . .	Body, sterling blue; running gear, black.	CAST . . . . .	En bloc.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4 $\frac{1}{4}$ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	118 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 inches.	ELECTRIC SOURCE .	Low tension magneto and storage battery.
REAR . . . . .	36 x 4 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS .	Contracting and ex- panding on both rear wheels.	TRANSMISSION . . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 28.9.	GEAR CHANGES . . .	Four forward, one re- verse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

**CHALMERS  
MOTOR  
COMPANY**  
**DETROIT, MICH.**

Price . . . . .	\$2400
Five-Passenger Touring Car .	2400
Seven-Passenger Touring Car	2600
Roadster . . . . .	2400
Coupe . . . . .	2700
Limousine . . . . .	3700

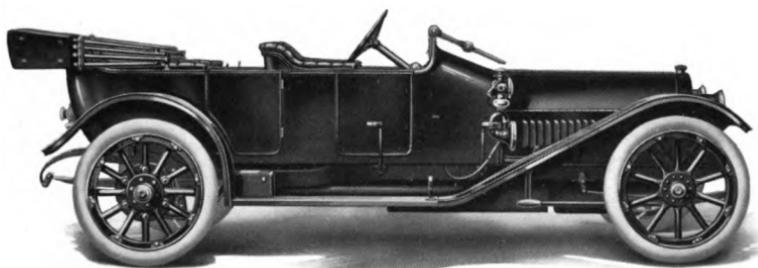


**MODEL: 18-CHALMERS "SIX" TORPEDO**

COLOR . . . . .	Body, sterling blue or Dunham gray; running gear, black.	ARRANGED . . . . .	Vertically, under hood.
SEATING CAPACITY .	Four persons.	CAST . . . . .	In blocks of three.
CLUTCH . . . . .	Multiple disc.	BORE . . . . .	4 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	130 inches.	STROKE . . . . .	5 $\frac{1}{4}$ inches.
GAUGE . . . . .	56 or 60 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Cellular.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE .	Low tension magneto and storage battery.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . .	(A. L. A. M. rating) 43.8.	TRANSMISSION . . .	Selective sliding gear.
CYLINDERS . . . . .	Six.	GEAR CHANGES . . .	Four forward, one reverse.
POSITION OF DRIVER Right side drive and right hand control.			

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

**CHALMERS**  
**MOTOR**  
**COMPANY**  
**DETROIT, MICH.**

Price . . . . .	\$2600
Five-Passenger Touring Car . . . . .	2400
Four-Passenger Torpedo . . . . .	2400
Roadster . . . . .	2400
Coupe . . . . .	2700
Limousine . . . . .	3700

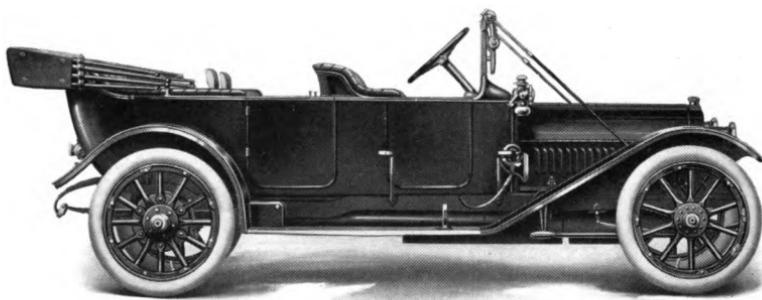


**MODEL: 18-CHALMERS "SIX" TOURING CAR**

<b>COLOR . . . . .</b>	Body, sterling blue; running gear, black.	<b>ARRANGED . . . . .</b>	Vertically, under hood.
<b>SEATING CAPACITY .</b>	Seven persons.	<b>CAST . . . . .</b>	In blocks of three.
<b>CLUTCH . . . . .</b>	Multiple disc.	<b>BORE . . . . .</b>	4 $\frac{1}{4}$ inches.
<b>WHEELBASE . . . . .</b>	130 inches.	<b>STROKE . . . . .</b>	5 $\frac{1}{4}$ inches.
<b>GAUGE . . . . .</b>	56 or 60 inches.	<b>COOLING . . . . .</b>	Water.
<b>TIRE DIMENSIONS:</b>		<b>RADIATOR . . . . .</b>	Cellular.
<b>FRONT . . . . .</b>	36 x 4 $\frac{1}{2}$ inches.	<b>IGNITION . . . . .</b>	Jump spark.
<b>REAR . . . . .</b>	36 x 4 $\frac{1}{2}$ inches.	<b>ELECTRIC SOURCE . . . . .</b>	Low tension magneto and storage battery.
<b>Brake Systems . . .</b>	Contracting and ex- panding on both rear wheels.	<b>DRIVE . . . . .</b>	Shaft.
<b>HORSE-POWER . . .</b>	(A. L. A. M. rating) 43.8.	<b>TRANSMISSION . . . . .</b>	Selective sliding gear.
<b>CYLINDERS . . . . .</b>	Six.	<b>GEAR CHANGES . . . . .</b>	Four forward, one reverse.

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

**CHALMERS  
MOTOR  
COMPANY**  
**DETROIT, MICH.**

Price . . . . .	\$3250
Five-Passenger Touring Car .	1950
Seven-Passenger Touring Car	2150
Four-Passenger Torpedo . .	1950
Roadster . . . . .	1950
Coupe . . . . .	2250

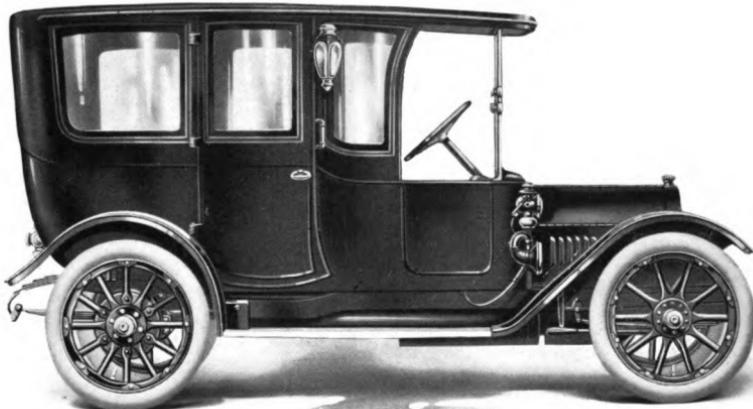

#### **MODEL: 17-CHALMERS "THIRTY-SIX" LIMOUSINE**

<b>COLOR</b> . . . . .	Body, valentine blue; running gear, black.	<b>CAST</b> . . . . .	En bloc.
<b>SEATING CAPACITY</b>	Seven persons.	<b>BORE</b> . . . . .	4 $\frac{1}{4}$ inches.
<b>CLUTCH</b> . . . . .	Multiple disc.	<b>STROKE</b> . . . . .	5 $\frac{1}{4}$ inches.
<b>WHEELBASE</b> . . . . .	118 inches.	<b>COOLING</b> . . . . .	Water.
<b>GAUGE</b> . . . . .	56 or 60 inches.	<b>RADIATOR</b> . . . . .	Cellular.
<b>TIRE DIMENSIONS:</b>		<b>IGNITION</b> . . . . .	Jump spark.
FRONT . . . . .	37 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE	Low tension magneto and storage battery.
REAR . . . . .	37 x 4 $\frac{1}{2}$ inches.	DRIVE	Shaft.
<b>BRAKE SYSTEMS</b> . . .	Contracting and expanding on both rear wheels.	TRANSMISSION	Selective sliding gear.
<b>HORSE-POWER</b> . . . . .	(A. L. A. M. rating) 28.9.	GEAR CHANGES	Four forward, one reverse.
<b>CYLINDERS</b> . . . . .	Four.	<b>POSITION OF DRIVER</b>	Right side drive and right hand control.
<b>ARRANGED</b> . . . . .	Vertically, under hood.		

Price includes electric lighting, self-starter, wind shield, speedometer and demountable rims.

**LOCOMOBILE  
C O M P A N Y  
O F A M E R I C A**  
**B R I D G E P O R T  
C O N N E C T I C U T**

Price . . . . .	\$4300
Touring . . . . .	4300
Roadster . . . . .	4300
Limousine . . . . .	5350
Landaulet . . . . .	5450
Berline Limousine . . . . .	5550
Berline Landaulet . . . . .	5650




**MODEL: LOCOMOBILE TORPEDO—TYPE R**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Four persons.	BORE . . . . .	4 $\frac{1}{4}$ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5 inches.
WHEELBASE . . . . .	128 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	54 $\frac{1}{2}$ inches.	RADIATOR . . . . .	Honeycomb—dual system.
TIRE DIMENSIONS:			
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	IGNITION . . . . .	Jump spark — dual system.
REAR . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
BRAKE SYSTEMS . . . Contracting and expanding on both rear wheels.			
HORSE-POWER . . . . .	(A. L. A. M. rating) 43.8.	DRIVE . . . . .	Shaft.
CYLINDERS . . . . .	Six.	TRANSMISSION . . . . .	Selective sliding gear.
ARRANGED . . . . .	Vertically, under hood.	GEAR CHANGES . . . . .	Four forward, one reverse.
POSITION OF DRIVER Right side drive and right hand control.			

Price includes top, top hood, electric lighting, self-starter, windshield and demountable rims.

**LOCOMOBILE  
C O M P A N Y  
O F A M E R I C A**  
**B R I D G E P O R T**  
**C O N N E C T I C U T**

Price . . . . .	\$5000
Torpedo . . . . .	5000
Roadster . . . . .	5000
Limousine . . . . .	6000
Landaulet . . . . .	6100

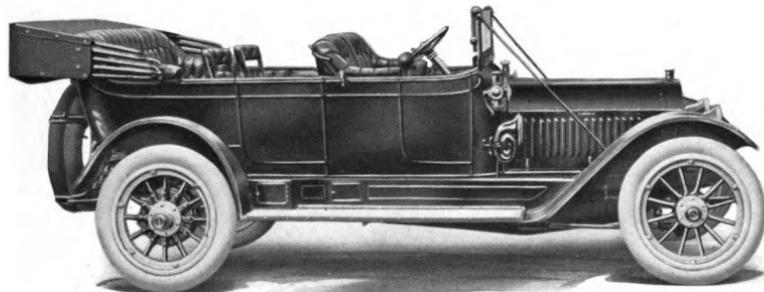

**MODEL: LOCOMOBILE SEVEN-PASSENGER TOURING CAR—TYPE M**


COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Seven persons.	BORE . . . . .	4 $\frac{1}{2}$ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5 $\frac{1}{2}$ inches.
WHEELBASE . . . . .	136 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	54 $\frac{1}{2}$ inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark — dual system.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
REAR . . . . .	37 x 5 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 48.6.	GEAR CHANGES . . . . .	Four forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, self-starter, windshield and demountable rims.

**LOCOMOBILE  
C O M P A N Y  
O F A M E R I C A**

**B R I D G E P O R T  
C O N N E C T I C U T**

Price . . . . .	\$3600
Touring . . . . .	3600
Roadster . . . . .	3600

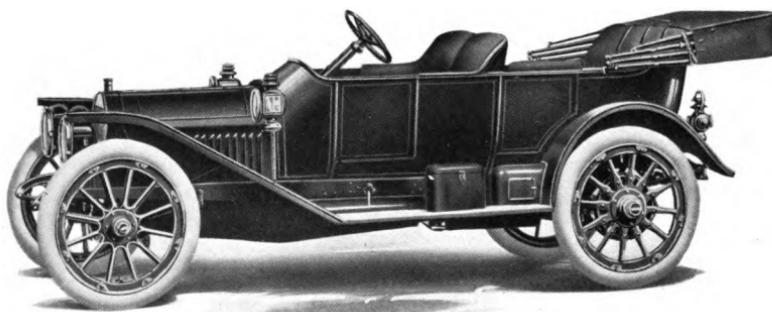


**MODEL: LOCOMOBILE TORPEDO—TYPE L**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Four persons.	BORE . . . . .	4 $\frac{1}{2}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	4 $\frac{1}{2}$ inches.
WHEELBASE . . . . .	120 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	54 $\frac{1}{2}$ inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:			
FRONT . . . . .	34 x 4 $\frac{1}{2}$ inches.	IGNITION . . . . .	Jump spark — dual system.
REAR . . . . .	34 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
BRAKE SYSTEMS . . . Contracting and expanding on both rear wheels.			
HORSE-POWER . . . . .	(A. L. A. M. rating) 32.4.	DRIVE . . . . .	Shaft.
CYLINDERS . . . . .	Four.	TRANSMISSION . . . . .	Selective sliding gear.
ARRANGED . . . . .	Vertically, under hood.	GEAR CHANGES . . . . .	Four forward, one reverse.
POSITION OF DRIVER Right side drive and right hand control.			

Price includes top, top hood, electric lighting, self-starter, windshield and demountable rims.

**PIERCE-ARROW  
MOTOR CAR  
COMPANY  
BUFFALO, N. Y.**

Price . . . . .	\$4300
Four-Passenger Touring Car	4300
Five-Passenger Touring Car	4300
Brougham . . . . .	5200
Landaulet . . . . .	5200

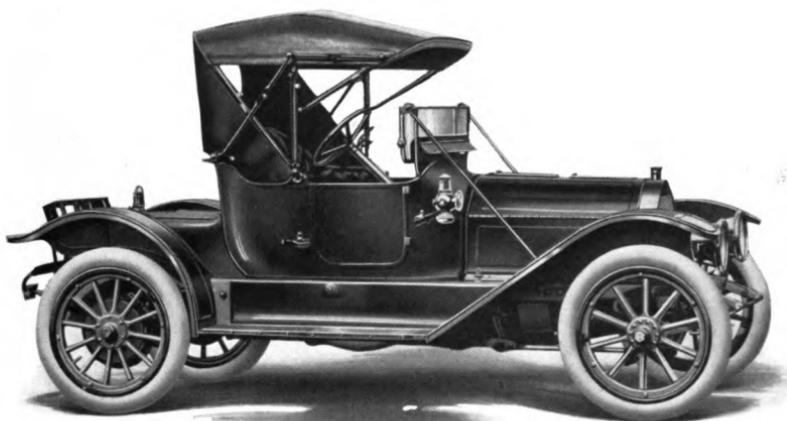


**MODEL: PIERCE-ARROW 38-C RUNABOUT**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Three persons.	BORE . . . . .	4 inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5½ inches.
WHEELBASE . . . . .	119 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	55 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4½ inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
REAR. . . . .	36 x 4½ inches.	DRIVE . . . . .	Shaft.
Brake Systems . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . . .	(A. L. A. M. rating) 38.4.	GEAR CHANGES . .	Four forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

**PIERCE-ARROW  
MOTOR CAR  
COMPANY**  
**BUFFALO, N. Y.**

Price . . . . .	\$4300
Runabout . . . . .	4300
Four-Passenger Touring Car . . . . .	4300
Brougham . . . . .	5200
Landaulet . . . . .	5200

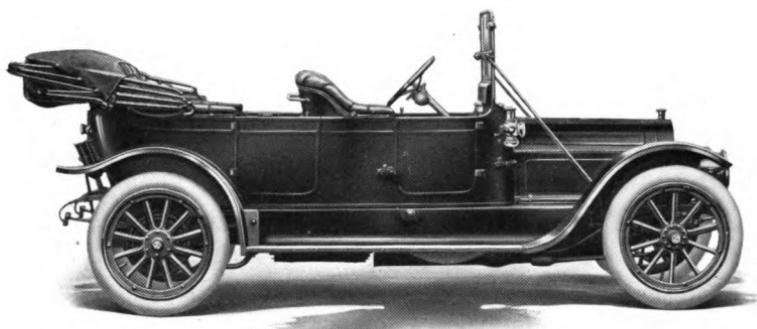


**MODEL: PIERCE-ARROW 38-C FIVE-PASSENGER TOURING CAR**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Five persons.	BORE . . . . .	4 inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5½ inches.
WHEELBASE . . . . .	132 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	55 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4½ inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
REAR . . . . .	36 x 4½ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 38.4.	GEAR CHANGES . . . . .	Four forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

**PIERCE-ARROW**  
**MOTOR CAR**  
**COMPANY**  
**BUFFALO, N. Y.**

Price . . . . .	\$5200
Runabout . . . . .	4300
Four-Passenger Touring Car . . . . .	4300
Five-Passenger Touring Car . . . . .	4300
Brougham . . . . .	5200

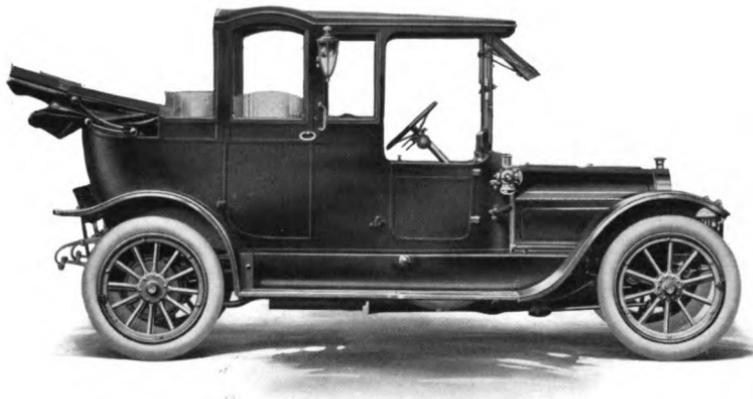

**MODEL: PIERCE-ARROW 38-C LANDAULET**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Six persons.	BORE . . . . .	4 inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5½ inches.
WHEELBASE . . . . .	132 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	55 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:			
FRONT . . . . .	36 x 4½ inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	36 x 4½ inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . . .	(A. L. A. M. rating) 38.4.	TRANSMISSION . . . . .	Selective sliding gear.
CYLINDERS . . . . .	Six.	GEAR CHANGES . . . . .	Four forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

**PIERCE-ARROW**  
**MOTOR CAR**  
**C O M P A N Y**  
**BUFFALO, N. Y.**

Price . . . . .	\$5200
Runabout . . . . .	4300
Four-Passenger Touring Car . . . . .	4300
Five-Passenger Touring Car . . . . .	4300
Landaulet . . . . .	5200




**MODEL: PIERCE-ARROW 38-C BROUHAM**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Six persons.	BORE . . . . .	4 inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5½ inches.
WHEELBASE . . . . .	132 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	55 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:			
FRONT . . . . .	36 x 4½ inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	36 x 4½ inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
		DRIVE . . . . .	Shaft.
		TRANSMISSION . . . . .	Selective sliding gear.
		GEAR CHANGES . . . . .	Four forward, one reverse.
		POSITION OF DRIVER . . . . .	Right side drive and right hand control.

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

**PIERCE-ARROW  
MOTOR CAR  
COMPANY**  
**BUFFALO, N. Y.**

Price . . . . .	\$4850
Runabout . . . . .	4850
Four-Passenger Touring Car .	4850
Seven-Passenger Touring Car	5000
Brougham . . . . .	6100
Landaulet . . . . .	6100
Suburban . . . . .	6100
Landau . . . . .	6100
Vestibule Suburban . . . .	6300
Vestibule Landau . . . . .	6300

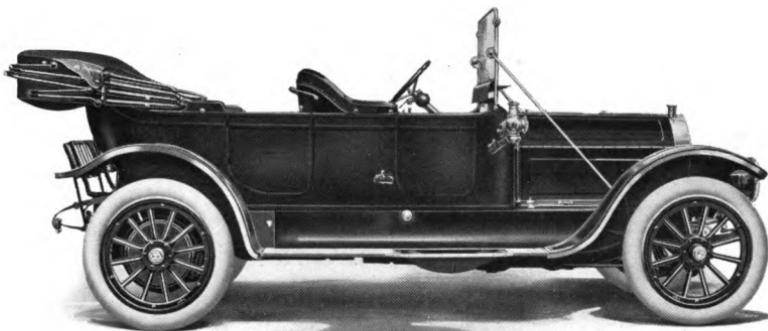


**MODEL: PIERCE-ARROW 48-B FIVE-PASSENGER TOURING CAR**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4 $\frac{1}{2}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{1}{2}$ inches.
WHEELBASE . . . . .	134 $\frac{1}{2}$ inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
<b>TIRE DIMENSIONS:</b>			
FRONT . . . . .	37 x 5 inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	37 x 5 inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . .	(A. L. A. M. rating) 48.6.	TRANSMISSION . . .	Selective sliding gear.
CYLINDERS . . . . .	Six.	GEAR CHANGES . . .	Four forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER	Right side drive and right hand control.

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

PIERCE-ARROW  
MOTOR CAR  
COMPANY  
BUFFALO, N. Y.

Price . . . . .	\$5000
Runabout . . . . .	4850
Four-Passenger Touring Car .	4850
Five-Passenger Touring Car .	4850
Brougham . . . . .	6100
Landaulet . . . . .	6100
Suburban . . . . .	6100
Landau . . . . .	6100
Vestibule Suburban . . . . .	6300
Vestibule Laudau . . . . .	6300

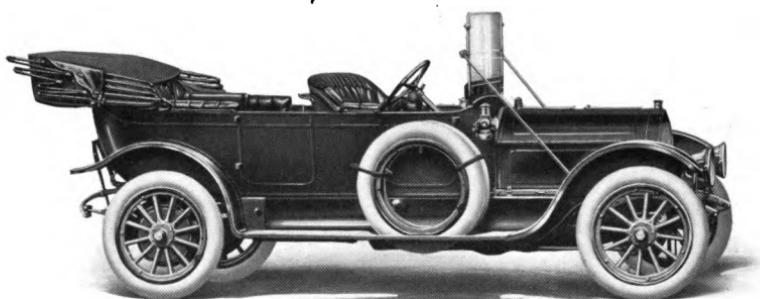


MODEL: PIERCE-ARROW 48-B SEVEN-PASSENGER TOURING CAR

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5½ inches.
WHEELBASE . . . .	142 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	37 x 5 inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
REAR. . . . .	37 x 5 inches.	DRIVE . . . . .	Shaft.
Brake Systems . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 48.6.	GEAR CHANGES . .	Four forward, one reverse.
CYLINDERS . . . .	Six.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

**PIERCE-ARROW  
MOTOR CAR  
COMPANY**  
**BUFFALO, N. Y.**

Price . . . . .	\$6100
Runabout . . . . .	4850
Four-Passenger Touring Car .	4850
Five-Passenger Touring Car .	4850
Seven-Passenger Touring Car	5000
Brougham . . . . .	6100
Landaulet . . . . .	6100
Suburban . . . . .	6100
Vestibule Landau . . . . .	6300
Vestibule Suburban . . . . .	6300

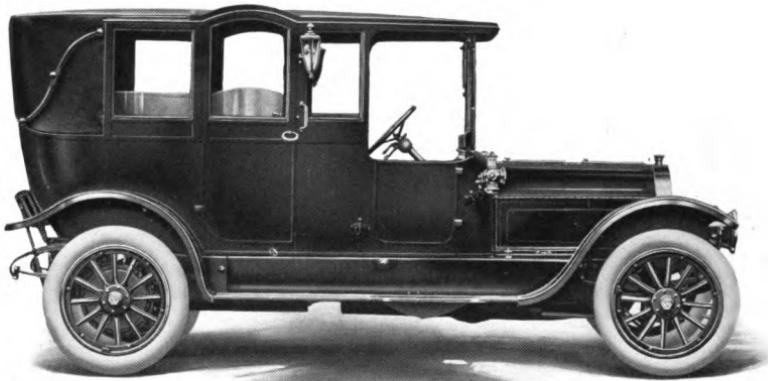


**MODEL: PIERCE-ARROW 48-B LANDAU**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	4 $\frac{1}{2}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{1}{2}$ inches.
WHEELBASE . . . .	142 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	37 x 5 inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
REAR . . . . .	37 x 5 inches.	Drive . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 48.6.	GEAR CHANGES . .	Four forward, one reverse.
CYLINDERS . . . .	Six.	POSITION OF DRIVER	Right side drive and right hand control
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

**PIERCE-ARROW  
MOTOR CAR  
COMPANY**  
**BUFFALO, N. Y.**

Price . . . . .	\$6100
Runabout . . . . .	4850
Four-Passenger Touring Car .	4850
Five-Passenger Touring Car .	4850
Seven-Passenger Touring Car	5000
Brougham . . . . .	6100
Landaulet . . . . .	6100
Landau . . . . .	6100
Vestibule Suburban . . . . .	6300
Vestibule Landau . . . . .	6300

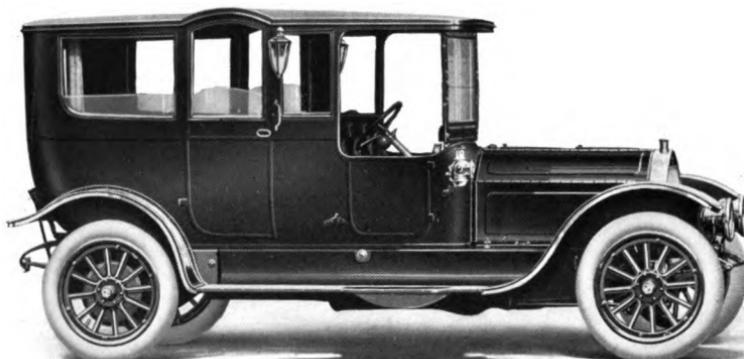


**MODEL: PIERCE-ARROW 48-B SUBURBAN**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	4 $\frac{1}{2}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{3}{4}$ inches.
WHEELBASE . . . . .	142 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	37 x 5 inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
REAR . . . . .	37 x 5 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 48.6.	GEAR CHANGES . .	Four forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

**PIERCE-ARROW  
MOTOR CAR  
COMPANY**  
**BUFFALO, N. Y.**

Price . . . . .	\$6000
Runabout . . . . .	5850
Four-Passenger Touring Car . . . . .	5850
Five-Passenger Touring Car . . . . .	5850
Brougham . . . . .	7100
Landaulet . . . . .	7100
Suburban . . . . .	7100
Landau . . . . .	7100
Vestibule Suburban . . . . .	7300
Vestibule Landau . . . . .	7300

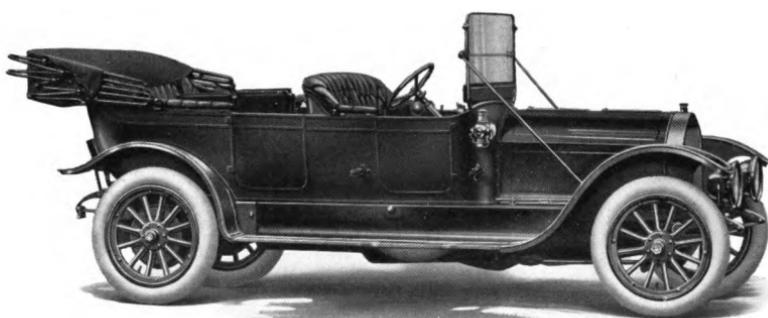


**MODEL: PIERCE-ARROW 66-A TOURING CAR**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Seven persons.	BORE . . . . .	5 inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	7 inches.
WHEELBASE . . . . .	147½ inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:			
FRONT . . . . .	37 x 5 inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	38 x 5½ inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . . .	(A. L. A. M. rating) 60.	TRANSMISSION . . . . .	Selective sliding gear.
CYLINDERS . . . . .	Six.	GEAR CHANGES . . . . .	Four forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

**PIERCE-ARROW**  
**MOTOR CAR**  
**C O M P A N Y**  
**BUFFALO, N. Y.**

Price . . . . .	\$7300
Runabout . . . . .	5850
Four-Passenger Touring Car .	5850
Five-Passenger Touring Car .	5850
Seven-Passenger Touring Car	6000
Brougham . . . . .	7100
Landaulet . . . . .	7100
Suburban . . . . .	7100
Landau . . . . .	7100
Vestibule Landau . . . . .	7300

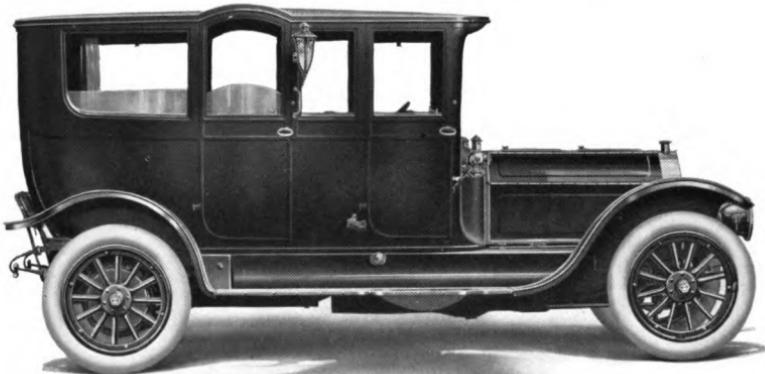


**MODEL: PIERCE-ARROW 66-A VESTIBULE SUBURBAN**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	5 inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	7 inches.
WHEELBASE . . . . .	147½ inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	37 x 5 inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
REAR. . . . .	38 x 5½ inches.	DRIVE . . . . .	Shaft.
Brake Systems . . . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 60.	GEAR CHANGES . . .	Four forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

**STEVENS-DURYEA  
C O M P A N Y  
CHICOPEE FALLS, MASS.**

Price . . . . .	\$4500
Two-Passenger Roadster . . . . .	4500
Two-Passenger Coupélet . . . . .	5000
Five-Passenger Convertible Phaeton . . . . .	5000
Five-Passenger Demi-Berline . . . . .	5550
Seven-Passenger Limousine . . . . .	5500
Seven-Passenger Berline . . . . .	5700

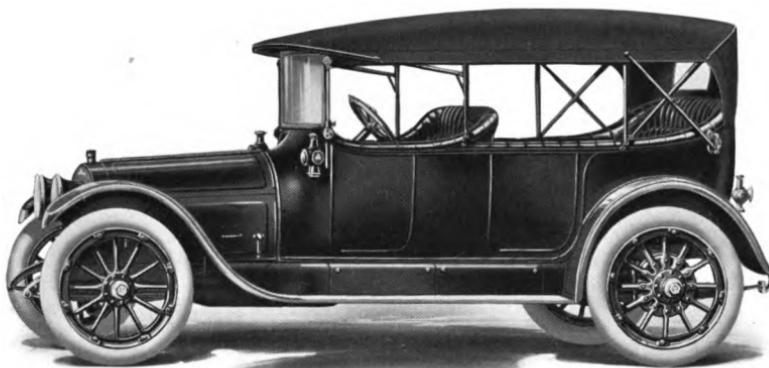


**MODEL: STEVENS-DURYEA "C-SIX" TOURING CAR**

COLOR . . . . .	English purple lake, lakelet green, mulberry red, visible blue or sapphire blue.	ARRANGED . . . . .	Vertically, under hood.
SEATING CAPACITY .	Five persons.	CAST . . . . .	In pairs.
CLUTCH . . . . .	Multiple disc.	BORE . . . . .	4 $\frac{1}{2}$ inches.
WHEELBASE . . . . .	131 inches.	STROKE . . . . .	5 $\frac{1}{4}$ inches.
GAUGE . . . . .	56 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Cellular.
FRONT . . . . .	37 x 4 $\frac{1}{2}$ inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	37 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . .	(A. I. A. M. rating) 44.6.	TRANSMISSION . .	Sliding gear.
CYLINDERS . . . . .	Six.	GEAR CHANGES . .	Three forward, one reverse.

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

**STEVENS-DURYEA  
C O M P A N Y  
CHICOPEE FALLS, MASS.**

Price . . . . .	\$5750
Seven-Passenger Touring . . . . .	4750
Seven-Passenger Convertible Phaeton . . . . .	5250
Seven-Passenger Berline . . . . .	5950

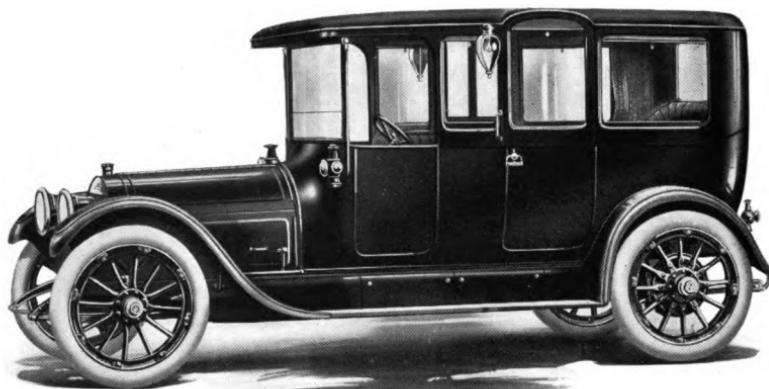


**MODEL: STEVENS-DURYEA "C-SIX" LIMOUSINE**

COLOR . . . . .	English purple lake, lakelet green, mulberry red, visible blue or sapphire blue.	ARRANGED . . . . .	Vertically, under hood.
SEATING CAPACITY .	Seven persons.	CAST . . . . .	In pairs.
CLUTCH . . . . .	Multiple disc.	BORE . . . . .	4 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	138 inches.	STROKE . . . . .	5 $\frac{1}{2}$ inches.
GAUGE . . . . .	56 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS: FRONT . . . . .	37 x 4 $\frac{1}{2}$ inches.	RADIATOR . . . . .	Cellular.
REAR . . . . .	37 x 5 inches.	IGNITION . . . . .	Jump spark.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	ELECTRIC SOURCE .	High tension magneto and storage battery.
HORSE-POWER . . .	(A. L. A. M. rating) 44.6.	DRIVE . . . . .	Shaft.
CYLINDERS . . . . .	Six.	TRANSMISSION . . . . .	Sliding gear.
Price includes electric lighting, self-starter, windshield, speedometer and demountable rims		GEAR CHANGES . . . . .	Three forward, one reverse.
		POSITION OF DRIVER . . . . .	Right side drive and right hand control.

**CADILLAC  
MOTOR CAR  
COMPANY**  
**DETROIT, MICH.**

**Price . . . \$1975**

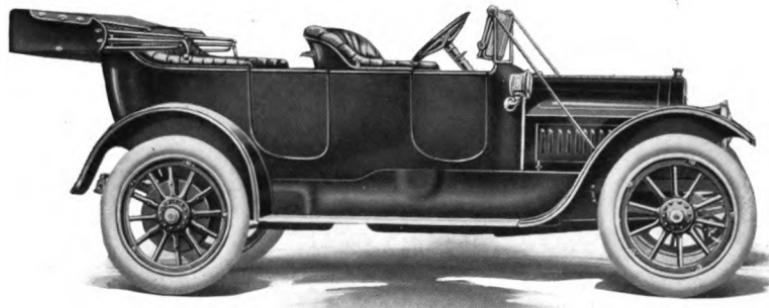


**MODEL: CADILLAC TOURING CAR**

COLOR . . . . .	Cadillac blue.	CAST . . . . .	Separately.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5¾ inches.
WHEELBASE . . . . .	120 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Tubular and plate.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4½ inches.	ELECTRIC SOURCE .	Delco dynamo, also distributor system.
REAR. . . . .	36 x 4½ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . . . .	40-50.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

C A D I L L A C  
M O T O R   C A R  
C O M P A N Y  
DETROIT. MICH.

Price . . . . . \$2075

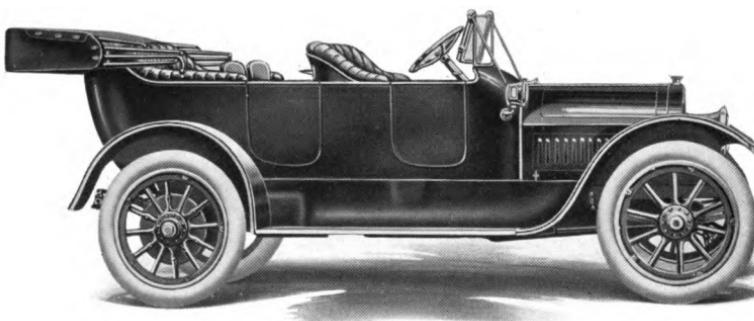


MODEL: CADILLAC SIX-PASSENGER TOURING CAR

COLOR . . . . .	Cadillac blue.	CAST . . . . .	Separately.
SEATING CAPACITY . . . . .	Six persons.	BORE . . . . .	4 $\frac{1}{2}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{3}{4}$ inches.
WHEELBASE . . . . .	120 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Tubular and plate.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE . . . . .	Delco dynamo, also distributor system.
REAR . . . . .	36 x 4 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	40-50.	GEAR CHANGES . . . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

C A D I L L A C  
M O T O R C A R  
C O M P A N Y  
DETROIT, MICH.

Price . . . . . \$1975

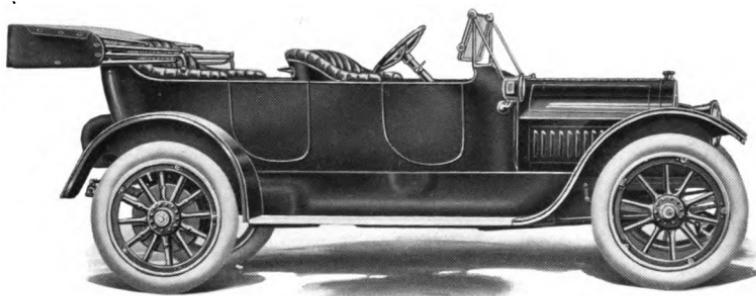


MODEL: CADILLAC PHAETON

COLOR . . . . .	Cadillac blue.	CAST . . . . .	Separately.
SEATING CAPACITY . . . . .	Four persons.	BORE . . . . .	4 $\frac{1}{2}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{3}{4}$ inches.
WHEELBASE . . . . .	120 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Tubular and plate.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE . . . . .	Delco dynamo, also distributor system.
REAR . . . . .	36 x 4 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	40-50.	GEAR CHANGES . . . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

CADILLAC  
MOTOR CAR  
COMPANY  
DETROIT, MICH.

Price . . . . . \$1975

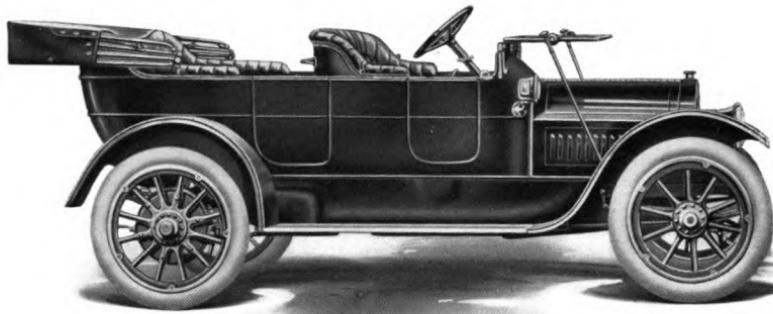

**MODEL: CADILLAC TORPEDO**

COLOR . . . . .	Cadillac blue.	CAST . . . . .	Separately.
SEATING CAPACITY .	Four persons.	BORE . . . . .	4 $\frac{1}{2}$ inches.
CLUTCH. . . . .	Cone.	STROKE . . . . .	5 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	120 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Tubular and plate.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE .	Delco dynamo, also distributor system.
REAR. . . . .	36 x 4 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . .	Selective sliding gear.
HORSE-POWER . . . . .	40-50.	GEAR CHANGES . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

CADILLAC  
MOTOR CAR  
COMPANY  
DETROIT, MICH.

Price . . . . . \$1975




**MODEL: CADILLAC ROADSTER**

COLOR . . . . .	Cadillac blue.	CAST . . . . .	Separately.
SEATING CAPACITY . . . . .	Two persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5¾ inches.
WHEELBASE . . . . .	120 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Tubular and plate.
TIRE DIMENSIONS:			
FRONT . . . . .	36 x 4½ inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	36 x 4½ inches.	ELECTRIC SOURCE . . . . .	Delco dynamo, also distributor system.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . . .	40-50.	TRANSMISSION . . . . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . . . .	Three forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

CADILLAC  
MOTOR CAR  
COMPANY  
DETROIT, MICH.

Price . . . . . \$2500

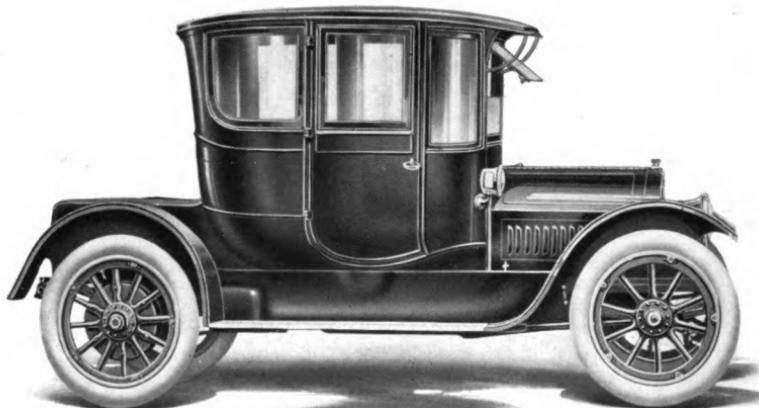

**MODEL: CADILLAC COUPE**

COLOR . . . . .	Cadillac Blue.	CAST . . . . .	Separately.
SEATING CAPACITY . . . . .	Four persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5¾ inches.
WHEELBASE . . . . .	120 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Tubular and Plate.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4½ inches.	ELECTRIC SOURCE . . . . .	Delco dynamo, also distributor system.
REAR . . . . .	36 x 4½ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	40-50.	GEAR CHANGES . . . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes electric lighting, electric self-starter, speedometer and demountable rims.

PRINTED IN U.S.A. BY THE CADILLAC MOTOR CAR COMPANY, DETROIT, MICHIGAN.

C A D I L L A C  
M O T O R C A R  
C O M P A N Y  
DETROIT, MICH.

Price . . . . . \$3250




**MODEL: CADILLAC LIMOUSINE**

COLOR . . . . .	Cadillac blue.	CAST . . . . .	Separately.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	4 $\frac{1}{2}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	120 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Tubular and plate.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE .	Delco dynamo, also distributor system.
REAR . . . . .	36 x 4 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . .	Selective sliding gear.
HORSE-POWER . . . . .	40-50.	GEAR CHANGES . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes electric lighting, electric self-starter, speedometer and demountable rims.

**POPE MANU-  
FACTURING  
C O M P A N Y**  
**HARTFORD, CONN.**

Price . . . . .	\$4250
Five-Passenger Phaeton . . .	4250
Two-Passenger Roadster . . .	4250
Seven-Passenger Limousine . .	5300
Seven-Passenger Landaulet . .	5300
Seven-Passenger Berline . . .	5550

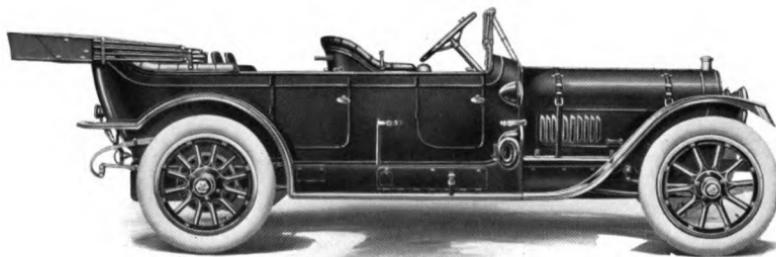


**MODEL: POPE-HARTFORD SEVEN-PASSENGER TOURING CAR 29**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	4 $\frac{1}{8}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{1}{8}$ inches.
WHEELBASE . . . . .	133 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Planetic.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	37 x 5 inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
REAR . . . . .	37 x 5 inches.	DRIVE . . . . .	Shaft.
		TRANSMISSION . . . . .	Selective sliding gear.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	GEAR CHANGES . . . . .	Four forward, one reverse.
HORSE-POWER . . . . .	60.	POSITION OF DRIVER .	Right side drive and right hand control.
CYLINDERS . . . . .	Six.		
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield and demountable rims.

POPE MANU-  
FACTURING  
COMPANY  
HARTFORD, CONN.

Price . . . . .	\$3250
Seven-Passenger Touring . . . . .	3500
Five-Passenger Phaeton . . . . .	3250
Two-Passenger Roadster . . . . .	3250
Seven-Passenger Limousine . . . . .	3300
Seven-Passenger Landaulet . . . . .	4300
Seven-Passenger Brougham . . . . .	4550

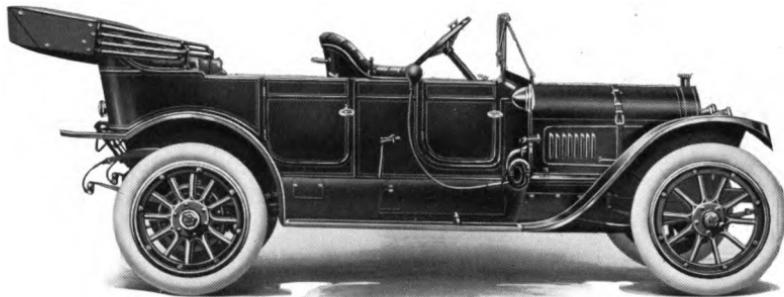

#### MODEL: POPE-HARTFORD FIVE-PASSENGER TOURING CAR 33


COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Five persons.	BORE . . . . .	4 $\frac{3}{4}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{1}{2}$ inches.
WHEELBASE . . . . .	124 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Planetic.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
REAR . . . . .	36 x 4 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	50.	GEAR CHANGES . . . . .	Four forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield and demountable rims.

POPE MANUFACTURING COMPANY  
HARTFORD, CONN.

Price . . . . .	\$2250
Four-Passenger Phaeton	2250
Two-Passenger Roadster	2250
Five-Passenger Limousine	3250
Three-Passenger Coupe . . .	2850

WRASSELL

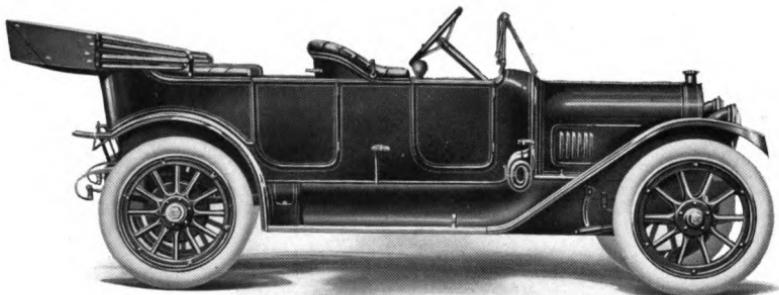


MODEL: POPE-HARTFORD FIVE-PASSENGER TOURING CAR 31

COLOR . . . . .	Pope blue, Pope lake or Pope gray.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4 $\frac{1}{2}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{1}{2}$ inches.
WHEELBASE . . . . .	118 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Planetic.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE	High tension magneto and storage battery.
REAR . . . . .	36 x 4 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . . .	40.	GEAR CHANGES . .	Four forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield and demountable rims.

P A C K A R D  
M O T O R C A R  
C O M P A N Y  
D E T R O I T, M I C H.

Price . . . . .	\$4750
Touring Car . . . . .	4850
Runabout . . . . .	4650
Limousine . . . . .	5850
Landaulet . . . . .	5950
Imperial Limousine . . . . .	6050
Brougham . . . . .	5800
Coupe . . . . .	5100

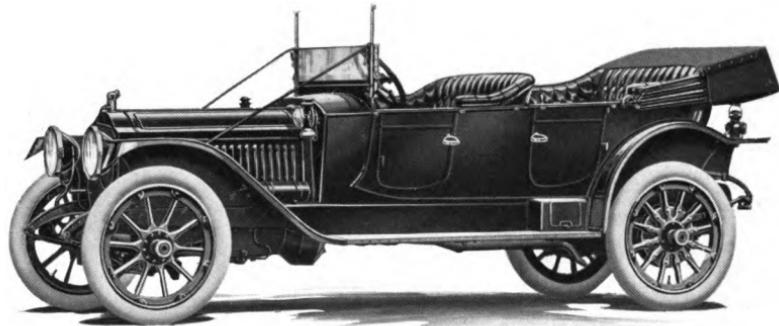


**MODEL: 1913 PACKARD "48" PHAETON**

COLOR . . . . .	Body and door panels, Packard blue striped with cream yellow; under body, body front, bonnet, radiator, fenders, etc., black; wheels, cream yellow striped with black.	CYLINDERS . . . . .	Six.
SEATING CAPACITY . . . . .	Five persons.	ARRANGED . . . . .	Vertically, under hood.
CLUTCH . . . . .	Dry plate.	CAST . . . . .	In pairs.
WHEELBASE . . . . .	139 inches.	BORE . . . . .	4½ inches.
GAUGE . . . . .	56 inches.	STROKE . . . . .	5½ inches.
TIRE DIMENSIONS:		COOLING . . . . .	Water.
FRONT . . . . .	36 x 4½ inches.	RADIATOR . . . . .	Cellular.
REAR . . . . .	37 x 5 inches.	IGNITION . . . . .	Jump spark.
Brake Systems . . . . .	Contracting and expanding on both rear wheels.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
HORSE-POWER . . . . .	(A. L. A. M. rating) 48.6.	DRIVE . . . . .	Shaft.
		TRANSMISSION . . . . .	Sliding gear.
		GEAR CHANGES . . . . .	Three forward, one reverse.
		POSITION OF DRIVER . . . . .	Right side drive and right hand control.

Price includes top, top hood, electric lighting, windshield and demountable rims.

P A C K A R D  
M O T O R C A R  
C O M P A N Y  
D E T R O I T, M I C H.

Price . . . . .	\$4150
Phaeton . . . . .	4150
Runabout . . . . .	4050
Limousine . . . . .	5200
Imperial Limousine . . . . .	5400
Landaulet . . . . .	5300
Brougham . . . . .	5200
Imperial Coupe . . . . .	4900
Coupe . . . . .	4500

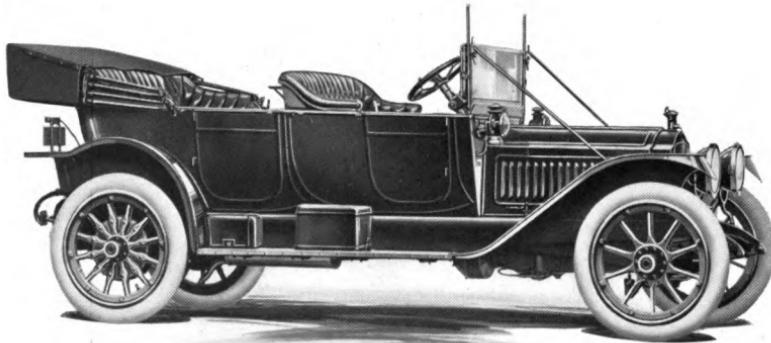

MODEL: 1913 PACKARD "38" TOURING CAR

COLOR . . . . .	Body and door panels, Packard blue striped with cream yellow; under body, body front, bonnet, radiator, fenders, etc., black; wheels, cream yellow striped with black.	HORSE-POWER . . . . .	(A. L. A. M. rating) 38.4.
SEATING CAPACITY .	Five persons.	CYLINDERS . . . . .	Six.
CLUTCH . . . . .	Dry plate.	ARRANGED . . . . .	Vertically, under hood.
WHEELBASE . . . . .	134 inches.	CAST . . . . .	In pairs.
GAUGE . . . . .	56 inches.	BORE . . . . .	4 inches.
TIRE DIMENSIONS:		STROKE . . . . .	5½ inches.
FRONT . . . . .	36 x 4 ½ inches.	COOLING . . . . .	Water.
REAR . . . . .	37 x 5 inches.	RADIATOR . . . . .	Cellular.
Brake Systems . . .	Contracting and expanding on both rear wheels.	IGNITION . . . . .	Jump spark.
		ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
		DRIVE . . . . .	Shaft.
		TRANSMISSION . . . . .	Sliding gear.
		GEAR CHANGES . . . . .	Three forward, one reverse.
		POSITION OF DRIVER . . . . .	Left side drive and left hand control.

Price includes top, top hood, electric lighting, electric self-starter, windshield and demountable rims.

P A C K A R D  
M O T O R C A R  
C O M P A N Y  
DETROIT, MICH.

Price . . . . .	\$5200
Touring Car . . . . .	4150
Phaeton . . . . .	4150
Runabout . . . . .	4050
Landaulet . . . . .	5300
Imperial Limousine . . . . .	5400
Brougham . . . . .	5200
Coupe . . . . .	4500
Imperial Coupe . . . . .	4900



MODEL: 1913 PACKARD "38" LIMOUSINE


COLOR . . . . .	Body, door panels and wheels, Packard blue striped with black; upper body, under body, fenders, etc., black.	ARRANGED . . . . .	Vertically, under hood.
SEATING CAPACITY . . . . .	Seven persons.	CAST . . . . .	In pairs.
CLUTCH . . . . .	Dry plate.	BORE . . . . .	4 inches.
WHEELBASE . . . . .	134 inches.	STROKE . . . . .	5½ inches.
GAUGE . . . . .	56 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Cellular.
FRONT . . . . .	36 x 4½ inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	37 x 5 inches.	ELECTRIC SOURCE . . . . .	Generator and storage battery.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . . .	(A. L. A. M. rating) 38.4.	TRANSMISSION . . . . .	Sliding gear.
CYLINDERS . . . . .	Six.	GEAR CHANGES . . . . .	Three forward, one reverse.
POSITION OF DRIVER		POSITION OF DRIVER	Left side drive and left hand control.

Price includes electric lighting, self-starter and demountable rims.

**MAXWELL - BRISCOE**  
**M O T O R**  
**C O M P A N Y**

3 WEST 61st STREET  
NEW YORK, N. Y.

Price . . . . . \$1675  
Roadster . . . . . 1625

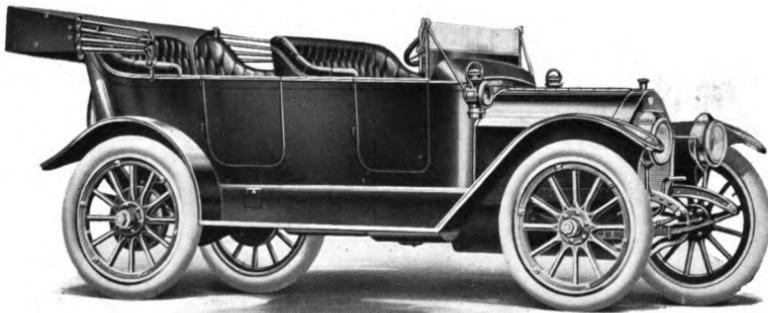

**MODEL: MAXWELL "40" TOURING CAR**


COLOR . . . . .	Body, royal blue; wheels, reseda gray.	ARRANGED . . . . .	Vertically, under hood.
SEATING CAPACITY .	Five persons.	CAST . . . . .	Separately.
CLUTCH . . . . .	Multiple disc.	BORE . . . . .	4½ inches.
WHEELBASE . . . . .	115 inches.	STROKE . . . . .	5¾ inches.
GAUGE . . . . .	56 or 60 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Honeycomb tubular.
FRONT . . . . .	36 x 4 inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	36 x 4 inches.	ELECTRIC SOURCE .	Low tension magneto and storage battery.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . .	(A. L. A. M. rating) 28.9.	TRANSMISSION . . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . .	Three forward, one reverse.
Price includes top, top hood, prestolite tank, self-starter, windshield, speedometer and demountable rims.			

MAXWELL MOTOR COMPANY, NEW YORK, N. Y.

**MAXWELL - BRISCOE**  
**M O T O R**  
**C O M P A N Y**

**3 WEST 61st STREET**  
**NEW YORK, N. Y.**

Price . . . . . \$1145  
Roadster . . . . . 1110

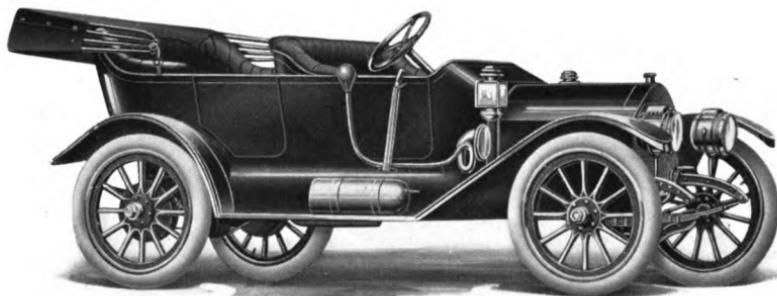

**MODEL: MAXWELL "30" TOURING CAR**

COLOR . . . . .	Body, black; wheels, Reseda gray.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4 inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	4½ inches.
WHEELBASE . . . . .	106 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Tubular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	32 x 3 ½ inches.	ELECTRIC SOURCE .	Low tension magneto and storage battery.
REAR . . . . .	32 x 3 ½ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Progressive sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 25.6.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDER . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, prestolite tank, self-starter and windshield.

**MAXWELL - BRISCOE**  
**M O T O R**  
**C O M P A N Y**

Price . . . . . \$785

3 WEST 61st STREET  
NEW YORK, N.Y.



**MODEL: MAXWELL "22" ROADSTER**


COLOR . . . . .	Brewster green with cream striping.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Two persons.	BORE . . . . .	3 $\frac{3}{4}$ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	4 inches.
WHEELBASE . . . . .	93 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Honeycomb tubular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	30 x 3 $\frac{1}{2}$ inches.	ELECTRIC SOURCE .	Low tension magneto and storage battery.
REAR . . . . .	30 x 3 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Progressive sliding gear.
HORSE-POWER . . . .	(A. L. A. M. rating) 22.5.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Left side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, prestolite tank, self-starter and windshield.

**DAYTON  
MOTOR CAR  
COMPANY**

**3 WEST 61st STREET  
NEW YORK, N. Y.**

Price . . . . .	\$5000
Roadster . . . . .	4900
Limousine . . . . .	6250

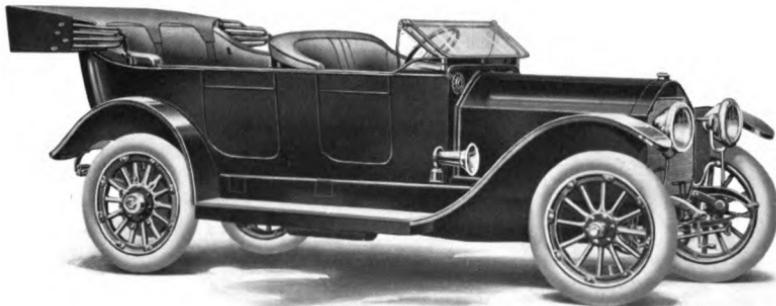

**MODEL: STODDARD-DAYTON KNIGHT**

COLOR . . . . .	Optional	CAST . . . . .	In threes.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	4 $\frac{1}{2}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{1}{2}$ inches.
WHEELBASE . . . . .	139 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 $\frac{1}{2}$ or 60 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark—double system.
FRONT . . . . .	36 x 5 inches.	ELECTRIC SOURCE .	High tension magneto, dynamo and storage battery.
REAR . . . . .	36 x 5 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . .	Selective sliding gear.
HORSE-POWER . . . .	(A. L. A. M. rating) 48.6.	GEAR CHANGES . . .	Three forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER	Left side drive and center control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, wind shield, speedometer and demountable rims.

**DAYTON  
MOTOR CAR  
COMPANY**

**3 WEST 61st STREET  
NEW YORK, N. Y.**

Price . . . . .	\$2800
Roadster . . . . .	2700
Limousine . . . . .	3900



**MODEL: STODDARD-DAYTON "48"**


COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	4 $\frac{3}{4}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 inches.
WHEELBASE . . . . .	123 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 $\frac{1}{2}$ or 60 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark—double system.
FRONT . . . . .	36 x 4 $\frac{1}{4}$ inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
REAR . . . . .	36 x 4 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . .	Selective sliding gear.
HORSE-POWER . . . .	(A. L. A. M. rating) 36.1.	GEAR CHANGES . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, windshield, speedometer and demountable rims.

**DAYTON  
MOTOR CAR  
COMPANY**

**3 WEST 61st STREET  
NEW YORK, N. Y.**

Price . . . . .	\$1850
Roadster . . . . .	1750
Landaulet . . . . .	2750
Coupe . . . . .	2350

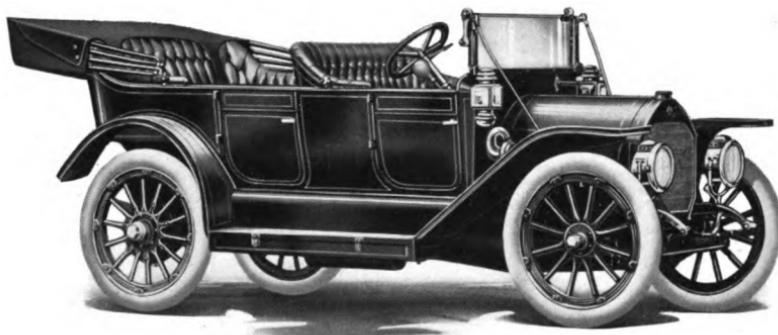

**MODEL: STODDARD-DAYTON "38"**


COLOR . . . . .	Optional.	CAST . . . . .	En bloc.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	4 $\frac{1}{2}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{1}{8}$ inches.
WHEELBASE . . . . .	114 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 $\frac{1}{2}$ or 60 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark — dual system.
FRONT . . . . .	36 x 4 inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
REAR . . . . .	36 x 4 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 32.4.	GEAR CHANGES . . . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, prestolite tank, windshield, speedometer and demountable rims.

**D A Y T O N  
MOTOR CAR  
C O M P A N Y**

**3 WEST 61st STREET  
NEW YORK, N. Y.**

Price . . . . .	\$1450
Roadster . . . . .	1350

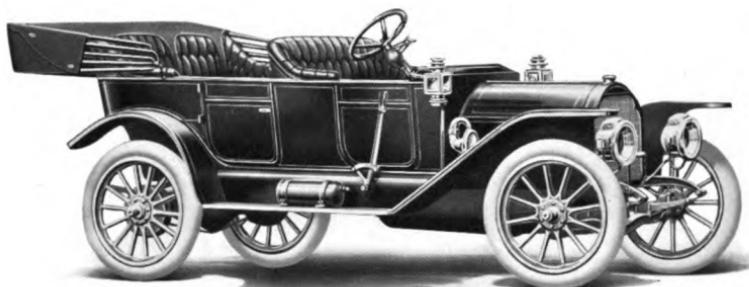

**MODEL: STODDARD-DAYTON "30"**


COLOR . . . . .	Optional	CAST . . . . .	En bloc.
SEATING CAPACITY .	Five persons	BORE . . . . .	4 inches.
CLUTCH. . . . .	Cone.	STROKE . . . . .	4½ inches.
WHEELBASE . . . . .	112 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56½ or 60 inches.	RADIATOR . . . . .	Cellular.
<b>TIRE DIMENSIONS:</b>			
FRONT . . . . .	33 x 4 inches.	IGNITION . . . . .	Jump spark — dual system.
REAR. . . . .	33 x 4 inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
<b>BRAKE SYSTEMS . . .</b> Contracting and expanding on both rear wheels.			
HORSE-POWER . . .	(A. L. A. M. rating) 25.6.	DRIVE . . . . .	Shaft.
CYLINDERS . . . . .	Four.	TRANSMISSION . . .	Selective sliding gear.
ARRANGED . . . . .	Vertically, under hood.	GEAR CHANGES . . .	Three forward, one reverse.
POSITION OF DRIVER Right side drive and right hand control.			

Price includes top, top hood and prestolite tank.

C O L U M B I A  
M O T O R C A R  
C O M P A N Y

3 W E S T 61<sup>st</sup> S T R E E T  
N E W Y O R K, N. Y.

Price . . . . .	\$3500
Limousine . . . . .	4800

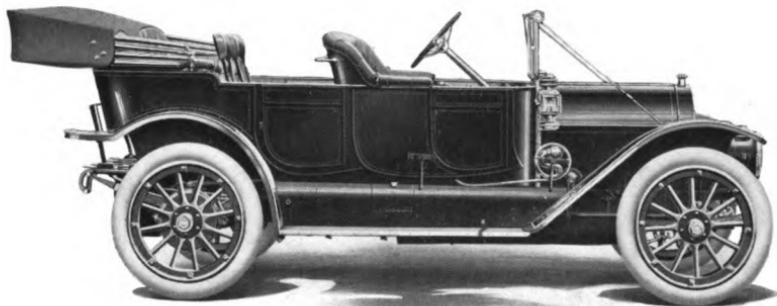

**MODEL: COLUMBIA CAVALIER**


COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	4 $\frac{7}{8}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{1}{2}$ inches.
WHEELBASE . . . .	120 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
REAR . . . . .	36 x 4 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 38.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . .	Pour.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric side and tail lights, prestolite tank, windshield, speedometer and demountable rims.

**C O L U M B I A  
M O T O R C A R  
C O M P A N Y**

3 WEST 61st STREET  
NEW YORK, N. Y.

Price . . . . .	\$4500
Two-Passenger Roadster . . .	4500
Close-Coupled Roadster . . .	4500
Limousine . . . . .	6000

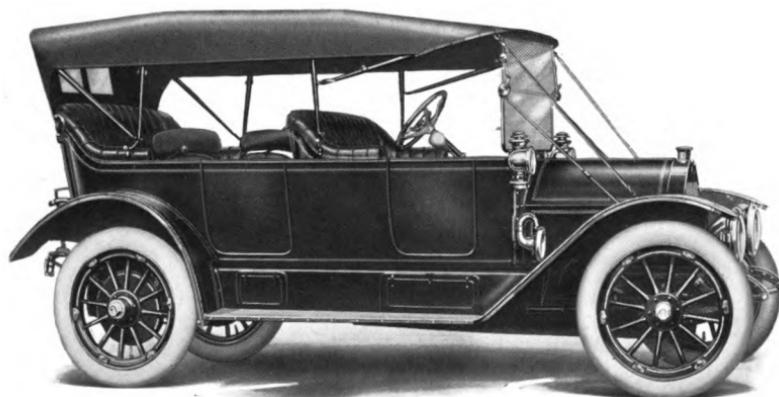


**MODEL: COLUMBIA KNIGHT**

COLOR . . . . .	Optional.	ARRANGED . . . . .	Vertically, under hood.
SEATING CAPACITY . . . . .	Seven persons.	CAST . . . . .	In pairs.
CLUTCH . . . . .	Cone.	BORE . . . . .	4½ inches.
WHEELBASE . . . . .	129 inches.	STROKE . . . . .	5¼ inches.
GAUGE . . . . .	56 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Cellular.
FRONT . . . . .	36 x 4½ inches or 37 x 5 inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	36 x 4½ inches or 37 x 5 inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . . .	(A. L. A. M. rating) 38.	TRANSMISSION . . . . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . . . .	Four forward, one reverse.
POSITION OF DRIVER		POSITION OF DRIVER	Right side drive and left hand control.

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

**SELDEN MOTOR  
VEHICLE  
COMPANY**  
**ROCHESTER  
NEW YORK**

Price . . . . .	\$2500
Seven-Passenger Touring Car . . .	2750
Four-Passenger Torpedo . . . . .	2500
Two-Passenger Roadster . . . . .	2500
Limousine. . . . .	3750

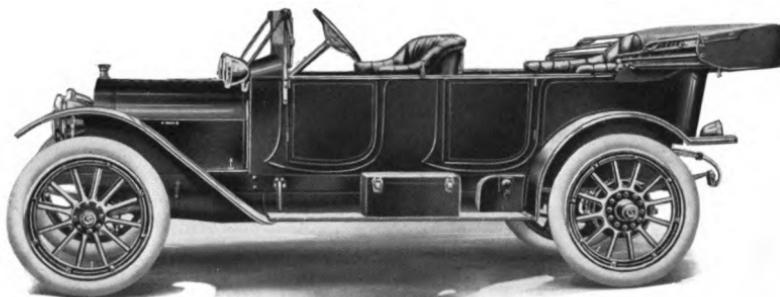


**MODEL: SELDEN TOURING CAR 48**

COLOR . . . . .	Selden blue.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4 $\frac{3}{4}$ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5 inches.
WHEELBASE . . . . .	125 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Square tube.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 inches.	ELECTRIC SOURCE .	High tension magneto and dry batteries.
REAR . . . . .	36 x 4 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 36.1.	GEAR CHANGES . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

J. I. CASE T. M.  
C O M P A N Y  
MOTOR WORKS  
RACINE, WIS.

Price . . . . . \$1500  
Two-Passenger Roadster . . . 1500

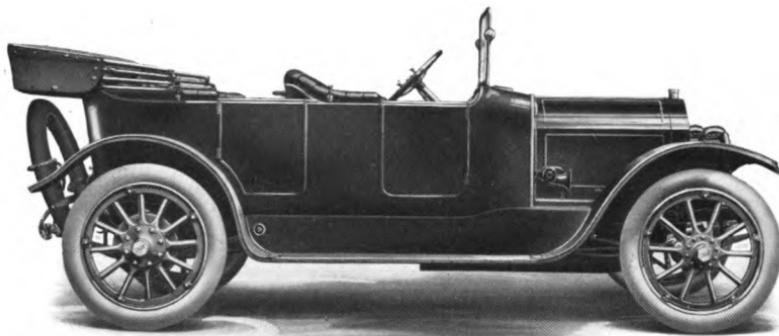


MODEL: CASE 30 TOURING CAR

COLOR . . . . .	Blue or gray.	CAST . . . . .	En bloc.
SEATING CAPACITY . . . . .	Five persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5¾ inches.
WHEELBASE . . . . .	115 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS : FRONT . . . . .	34 x 4 inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	34 x 4 inches.	ELECTRIC SOURCE . . . . .	Low tension magneto and dry batteries.
Brake Systems . . . . .	Internal expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . . .	(A. L. A. M. rating) 27.2.	TRANSMISSION . . . . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . . . .	Three forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER . . . . .	Right side drive and left hand control.

Price includes top, top hood, electric lighting, self-starter, windshield and demountable rims

J. I. CASE T. M.  
C O M P A N Y  
MOTOR WORKS  
RACINE, WIS.

Price . . . . .	\$2200
Seven-Passenger Touring . . .	2400
Limousine . . . . .	3200

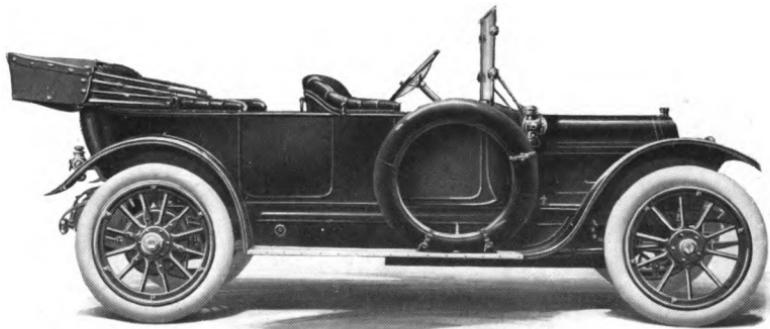


#### MODEL: CASE 40 TOURING CAR

COLOR . . . . .	Blue or gray.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Single disc.	STROKE . . . . .	5¾ inches.
WHEELBASE . . . . .	124 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Cellular
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	37 x 4½ inches.	ELECTRIC SOURCE .	Low tension magneto and dry batteries.
REAR . . . . .	37 x 4½ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 32.4.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims

**COLE MOTOR  
CAR COMPANY  
INDIANAPOLIS, IND.**

Price . . . . .	\$2485
Four-Passenger Toy Tonneau . . .	2485
Two-Passenger Roadster . . . .	2485
Four-Passenger Coupe . . . .	3000
Seven-Passenger Berline . . . .	
Limousine . . . . .	4250

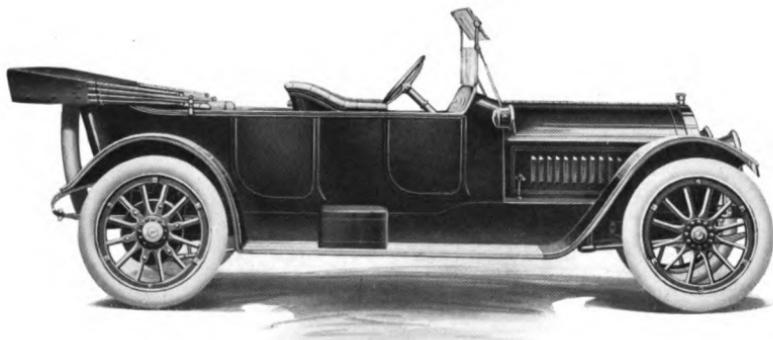


**MODEL: COLE "60" TOURING CAR**

COLOR . . . . .	Dark Cole blue with black mouldings.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	4¾ inches.
WHEELBASE . . . . .	132 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	37 x 4½ inches.	ELECTRIC SOURCE .	Delco System.
REAR . . . . .	37 x 4½ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS .	Contracting and expanding on both rear wheels.	TRANSMISSION .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 40.9.	GEAR CHANGES .	Three forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

J A C K S O N  
A U T O M O B I L E  
C O M P A N Y  
J A C K S O N , M I C H .

Price . . . . . \$1500

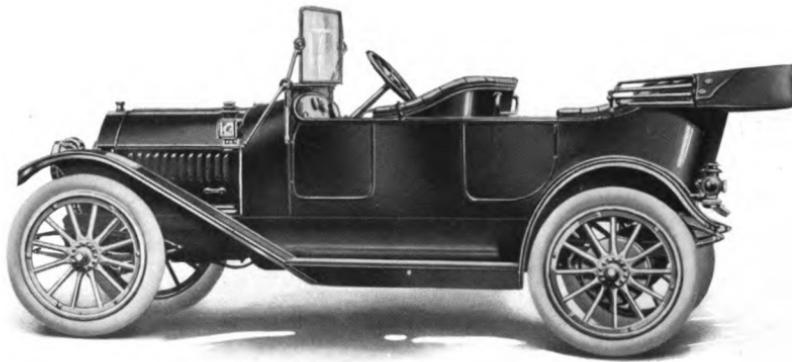


MODEL: JACKSON "OLYMPIC"

COLOR . . . . .	Dark maroon.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Five persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	4¾ inches
WHEELBASE . . . . .	115 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	34 x 4 inches	ELECTRIC SOURCE . . . . .	Low tension magneto and dry batteries.
REAR . . . . .	34 x 4 inches.	DRIVE . . . . .	Shaft.
Brake Systems . . . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 27.2.	GEAR CHANGES . . . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, prestolite tank, self-starter, windshield, speedometer and demountable rims.

J A C K S O N  
A U T O M O B I L E  
C O M P A N Y  
JACKSON, MICH.

Price . . . . . \$1975

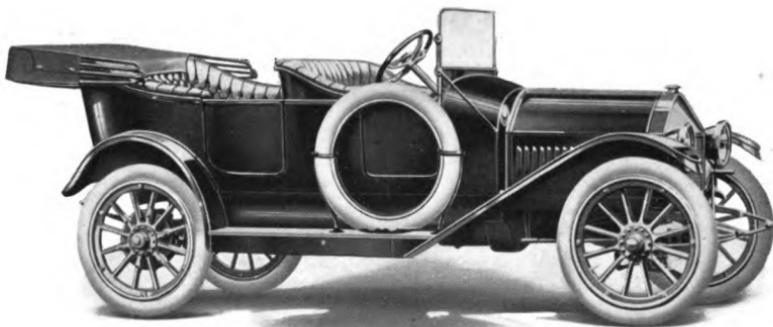


**MODEL: JACKSON "MAJESTIC"**

COLOR . . . . .	Dark blue.	ARRANGED . . . . .	Vertically, under hood.
SEATING CAPACITY .	Five persons.	CAST . . . . .	In pairs.
CLUTCH . . . . .	Cone.	BORE . . . . .	4 $\frac{1}{2}$ inches.
WHEELBASE . . . . .	124 inches.	STROKE . . . . .	5 $\frac{1}{4}$ inches.
GAUGE . . . . .	56 or 60 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Cellular.
FRONT . . . . .	36 x 4 inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	36 x 4 inches.	ELECTRIC SOURCE .	Low tension magneto and dry batteries.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . . .	(A. L. A. M. rating) 32.4.	TRANSMISSION . . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . .	Three forward, one reverse.
POSITION OF DRIVER Right side drive and right hand control.			

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

J A C K S O N  
A U T O M O B I L E  
C O M P A N Y  
J A C K S O N , M I C H .

Price . . . . . \$2650  
Five-Passenger Touring Car . . . . . 2500

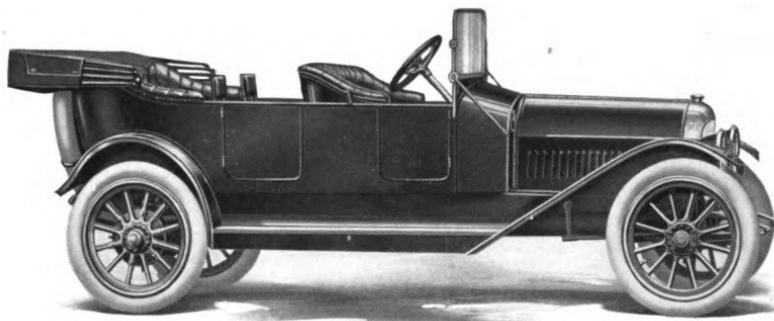


**MODEL: JACKSON "SULTANIC"**

COLOR . . . . .	Dark blue.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	4¾ inches.
WHEELBASE . . . . .	138 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4½ inches.	ELECTRIC SOURCE .	Low tension magneto.
REAR . . . . .	36 x 4¾ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and ex-panding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 40.9.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable wheels.

**E. R. THOMAS  
MOTOR CAR  
COMPANY**  
**BUFFALO, NEW YORK**

Price . . . . .	\$4800
Six-Passenger Touring Car . . . . .	4800
Five-Passenger Phaeton . . . . .	4750
Four-Passenger Surrey . . . . .	4700
Two-Passenger Runabout . . . . .	4600

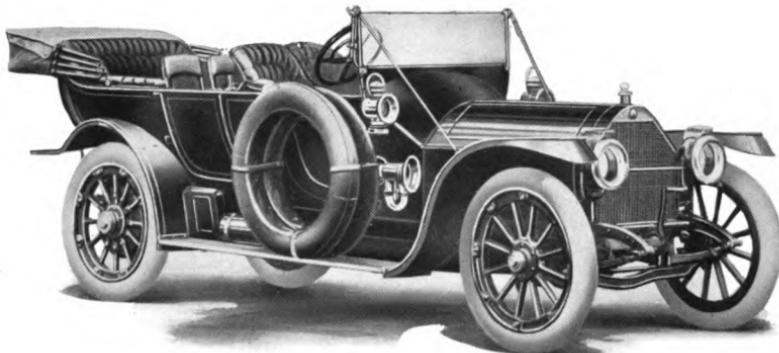


**MODEL: THOMAS 6-46**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5½ inches.
WHEELBASE . . . . .	134 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:			
FRONT . . . . .	36 x 4 ½ inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	37 x 5 inches.	ELECTRIC SOURCE .	High tension magneto
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . .	(A.L.A.M. rating) 46.	TRANSMISSION . .	Selective sliding gear.
CYLINDERS . . . . .	Six.	GEAR CHANGES . .	Three forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER	Right side drive and right hand control.

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims

MITCHELL - LEWIS  
M O T O R  
C O M P A N Y  
RACINE, WISCONSIN

Price . . . . . \$1500  
Two-Passenger . . . 1500

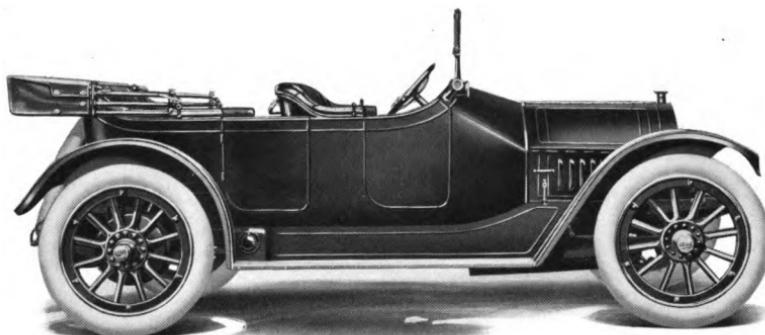


**MODEL: MITCHELL FIVE-PASSENGER TOURING CAR 5-4**

COLOR . . . . .	Body, dark Imperial French blue; running gear, black.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	7 inches.
WHEELBASE . . . . .	120 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Honeycomb tubular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 inches.	ELECTRIC SOURCE .	High tension magneto and battery.
REAR . . . . .	36 x 4 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Selective gear.
HORSE-POWER . . .	(A. L. A. M. rating) 28.9.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Left side drive and center control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

MITCHELL - LEWIS  
M O T O R  
C O M P A N Y  
RACINE, WISCONSIN

Price . . . . . \$1850  
Two-Passenger . . . 1850

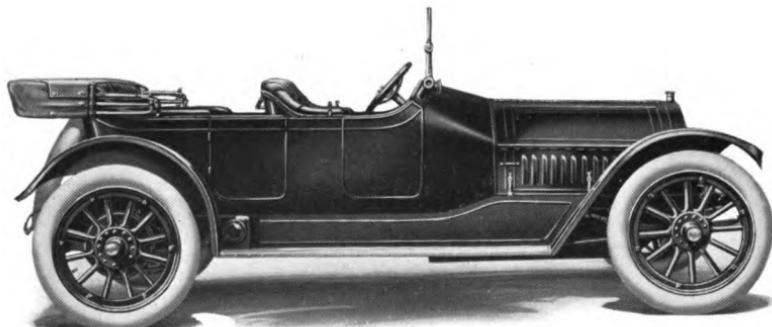


**MODEL: MITCHELL FIVE-PASSENGER TOURING CAR 5-6**

COLOR . . . . .	Body, dark Imperial French blue; running gear, black.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Five persons.	BORE . . . . .	4 inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	6 inches.
WHEELBASE . . . . .	132 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Honeycomb tubular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 inches.	ELECTRIC SOURCE . . . . .	High tension magneto and battery.
REAR . . . . .	36 x 4 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 38.4.	GEAR CHANGES . . . . .	Three forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER . . . . .	Left side drive and center control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

MITCHELL - LEWIS  
M O T O R  
C O M P A N Y  
RACINE, WISCONSIN

Price . . . . . \$2500

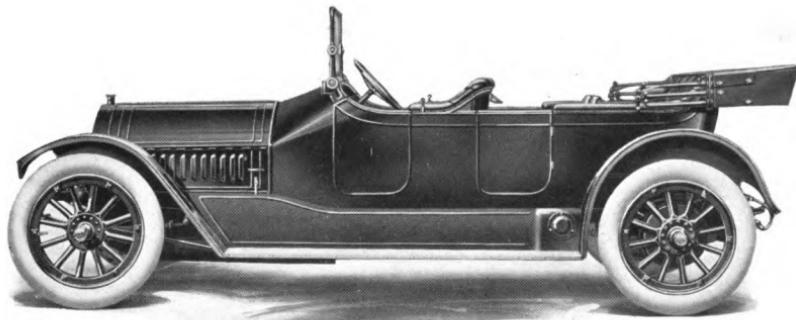

MODEL: MITCHELL SEVEN-PASSENGER TOURING CAR 7-6

COLOR . . . . .	Body, dark Imperial French blue; running gear, black.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	4 $\frac{1}{4}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	7 inches.
WHEELBASE . . . . .	144 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Honeycomb tubular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE .	High tension magneto and battery.
REAR . . . . .	36 x 4 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Selective gear.
HORSE-POWER . . .	(A. L. A. M. rating) 43.8.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER	Left side drive and center control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

**CARTERCAR  
COMPANY**  
PONTIAC, MICH.

Price . . . . .	\$1700
Roadster . . . . .	1600
Coupe . . . . .	1900



**MODEL: CARTERCAR FIVE-PASSENGER TOURING—5-A**

COLOR . . . . .	Raven blue and Cartercar gray.	ARRANGED . . . . .	Vertically, under hood.
SEATING CAPACITY .	Five persons.	CAST . . . . .	In pairs.
WHEELBASE . . . .	116 inches.	BORE . . . . .	4½ inches.
GAUGE . . . . .	56 or 60 inches.	STROKE . . . . .	4¾ inches.
TIRE DIMENSIONS:		COOLING . . . . .	Water.
FRONT . . . . .	36 x 4 inches.	RADIATOR . . . . .	Honeycomb.
REAR . . . . .	36 x 4 inches.	IGNITION . . . . .	Jump spark.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	ELECTRIC SOURCE . . . . .	Low tension magneto and dry batteries.
HORSE-POWER . . .	(A. L. A. M. rating) 27.2.	DRIVE . . . . .	Single chain.
CYLINDERS . . . . .	Four.	TRANSMISSION . . . . .	Friction.

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

CARTERCAR  
COMPANY  
PONTIAC, MICH.

Price . . . . .	\$1600
Coupe . . . . .	1900
Sedan . . . . .	2000




**MODEL: CARTERCAR TWO-PASSENGER ROADSTER—5-B**

COLOR . . . . .	Raven blue and Cartercar gray.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Two persons.	BORE . . . . .	4½ inches.
WHEELBASE . . . .	116 inches.	STROKE . . . . .	4¾ inches.
GAUGE . . . . .	56 or 60 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Honeycomb.
FRONT . . . . .	36 x 4 inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	36 x 4 inches.	ELECTRIC SOURCE .	Low tension magneto and dry batteries.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Single chain.
HORSE-POWER . . .	(A. L. A. M. rating) 27.2.	TRANSMISSION . .	Friction.
CYLINDERS . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims..

CARTERCAR  
C O M P A N Y  
PONTIAC, MICH.

Price . . . . .	\$1900
Roadster . . . . .	1600
Sedan . . . . .	2000

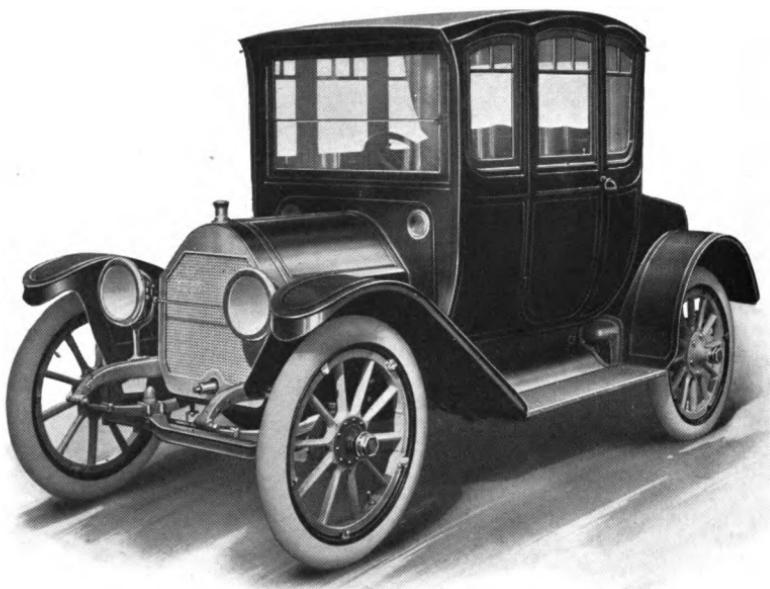


MODEL: CARTERCAR THREE-PASSENGER COUPE—5-C

COLOR . . . . .	Raven blue and Cartercar gray.	ARRANGED . . . . .	Vertically, under hood.
SEATING CAPACITY .	Three persons.	CAST . . . . .	In pairs.
WHEELBASE . . . .	116 inches.	BORE . . . . .	4½ inches.
GAUGE . . . . .	56 or 60 inches.	STROKE . . . . .	4¾ inches.
TIRE DIMENSIONS:		COOLING . . . . .	Water.
FRONT . . . . .	36 x 4 inches.	RADIATOR . . . . .	Honeycomb.
REAR . . . . .	36 x 4 inches.	IGNITION . . . . .	Jump spark.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	ELECTRIC SOURCE . .	Low tension magneto and dry batteries.
HORSE-POWER . . .	(A. L. A. M. rating) 27.2.	DRIVE . . . . .	Single chain.
CYLINDERS . . . .	Four.	TRANSMISSION . .	Friction.
Price includes electric lighting, electric self-starter, windshield, speedometer and demountable rims.			

Digitized by Google

NATIONAL  
MOTOR VEHICLE  
C O M P A N Y  
INDIANAPOLIS, IND.

Price . . . . .	\$3300
Semi-Racing Roadster . . . . .	2750
Speedway Roadster . . . . .	3150
Four-Passenger Toy Tonneau . . .	3300
Seven-Passenger Touring Car . .	3400

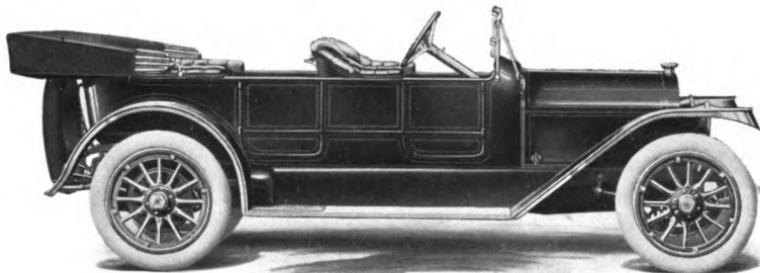


**MODEL: NATIONAL 40, IMPROVED SERIES "V"**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	6 inches.
WHEELBASE . . . . .	128 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS :		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4½ inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
REAR . . . . .	36 x 4½ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . .	40.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Left side drive and center control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

**F L A N D E R S**  
**M O T O R**  
**C O M P A N Y**  
**D E T R O I T , M I C H .**

Price . . . . .	\$2250
Roadster . . . . .	2200

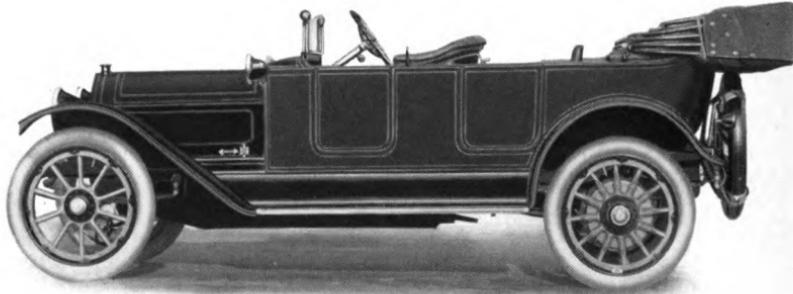


#### MODEL: FLANDERS 50-SIX TOURING CAR

COLOR . . . . .	Body, Flanders blue, black, or gray; running gear, black; wheels, gray with black stripe.	ARRANGED . . . . .	Vertically, under hood.
SEATING CAPACITY .	Seven persons.	CAST . . . . .	En bloc.
CLUTCH . . . . .	Cone.	BORE . . . . .	4 inches.
WHEELBASE . . . . .	130 inches.	STROKE . . . . .	4 $\frac{3}{4}$ inches.
GAUGE . . . . .	56 or 60 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Honeycomb.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE .	Low tension magneto.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . . .	(A. L. A. M. rating) 38.4.	TRANSMISSION . . .	Selective sliding gear.
CYLINDERS . . . . .	Six.	GEAR CHANGES . . .	Three forward, one reverse
POSITION OF DRIVER Right side drive and right hand control.			

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

**H E R R E S H O F F  
M O T O R C O M P A N Y  
D E T R O I T, M I C H.**

Price . . . . .	\$1850
Two-Passenger Roadster . . .	1850

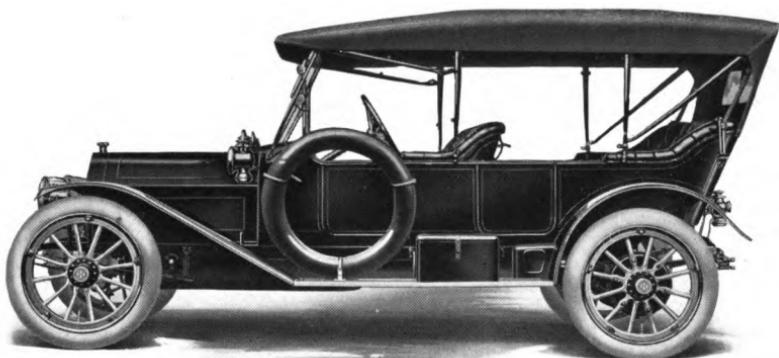


**MODEL: HERRESHOFF FIVE-PASSENGER TOURING CAR "SIX-36"**

COLOR . . . . .	B o d y , Herreshoff Royal blue; running gear, black; wheels, blue.	CYLINDERS . . . . .	Six.
SEATING CAPACITY .	Five persons.	ARRANGED . . . . .	Vertically, under hood.
CLUTCH. . . . .	Multiple disc.	CAST . . . . .	En bloc.
WHEELBASE . . . . .	124 inches.	BORE . . . . .	3½ inches.
GAUGE . . . . .	56 inches.	STROKE . . . . .	4½ inches.
TIRE DIMENSIONS:		COOLING . . . . .	Water.
FRONT . . . . .	34 x 4 inches.	RADIATOR . . . . .	Honeycomb.
REAR. . . . .	34 x 4 inches.	IGNITION . . . . .	Jump spark.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
HORSE-POWER . . .	(A. L. A. M. rating) 27.4.	DRIVE . . . . .	Shaft.
		TRANSMISSION . . .	Selective sliding gear.
		GEAR CHANGES . . .	Four forward, one reverse.
		POSITION OF DRIVER .	Left side drive and center control.

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

H E R R E S H O F F  
MOTOR COMPANY  
DETROIT, MICH.

Price . . . . . \$1350

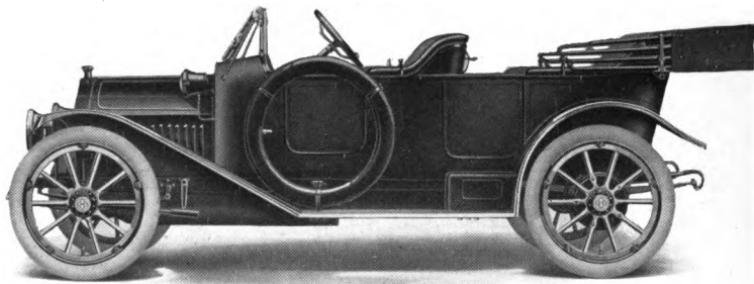


**MODEL: HERRESHOFF 30 TOURING CAR**

COLOR . . . . .	Body, Herreshoff Royal blue; running gear, black.	ARRANGED . . . . .	Vertically, under hood.
SEATING CAPACITY . . . . .	Five persons.	CAST . . . . .	En bloc.
CLUTCH . . . . .	Multiple disc.	BORE . . . . .	3½ inches.
WHEELBASE . . . . .	110 inches.	STROKE . . . . .	4½ inches.
GAUGE . . . . .	52 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Tubular.
FRONT . . . . .	32 x 3½ inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	32 x 3½ inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . . .	(A. L. A. M. rating) 18.2.	TRANSMISSION . . . . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . . . .	Four forward, one reverse.
POSITION OF DRIVER Left side drive and center control.			

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

**H E R R E S H O F F  
M O T O R C O M P A N Y  
D E T R O I T, M I C H.**

Price . . . . . \$1250

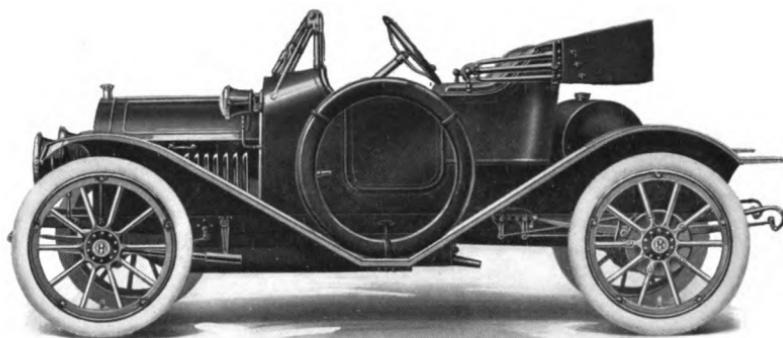


**MODEL: HERRESHOFF 30 RUNABOUT**

COLOR . . . . .	Body, Herreshoff Royal blue; running gear, black.	ARRANGED . . . . .	Vertically, under hood.
SEATING CAPACITY .	Two persons.	CAST . . . . .	En bloc.
CLUTCH . . . . .	Multiple disc.	BORE . . . . .	3½ inches.
WHEELBASE . . . . .	100 inches.	STROKE . . . . .	4½ inches.
GAUGE . . . . .	52 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Tubular.
FRONT . . . . .	32 x 3½ inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	32 x 3½ inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . . .	(A. L. A. M. rating) 18.2.	TRANSMISSION . . . . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . . . .	Four forward, one reverse.
POSITION OF DRIVER Left side drive and center control.			

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

P R E M I E R  
M O T O R M F G .  
C O M P A N Y  
INDIANAPOLIS, IND

Price . . . . .	\$2735
Limousine . . . . .	4250
Coupe . . . . .	3750
Clubman . . . . .	2735
Roadster . . . . .	2735

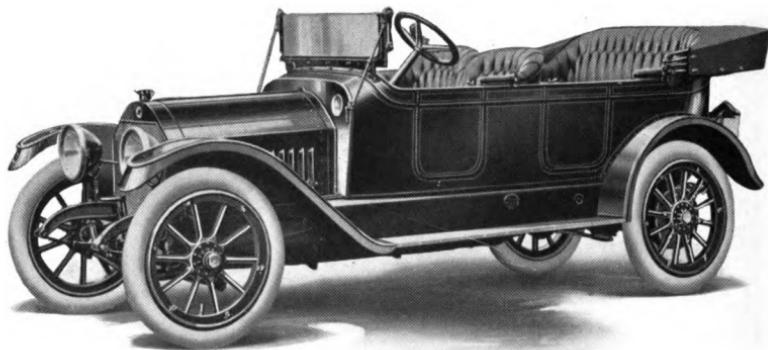


**MODEL: PREMIER 6-40 SERIES X**

COLOR . . . . .	Body, blue - black ; running gear, black	CAST. . . . .	In blocks of three.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4 inches.
CLUTCH. . . . .	Multiple disc.	STROKE . . . . .	5 inches.
WHEELBASE . . . . .	132 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 $\frac{1}{2}$ or 61 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE .	High tension dual magneto with storage battery.
REAR. . . . .	36 x 4 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and ex- panding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M rating) 38.4.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER	Left side drive and center control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

P R E M I E R  
M O T O R M F G.  
C O M P A N Y  
INDIANAPOLIS, IND.

Price . . . . .	\$4000
Coupe . . . . .	5000
Roadster . . . . .	4000
DeLuxe . . . . .	6000
Limousine . . . . .	5500
Clubman . . . . .	4000

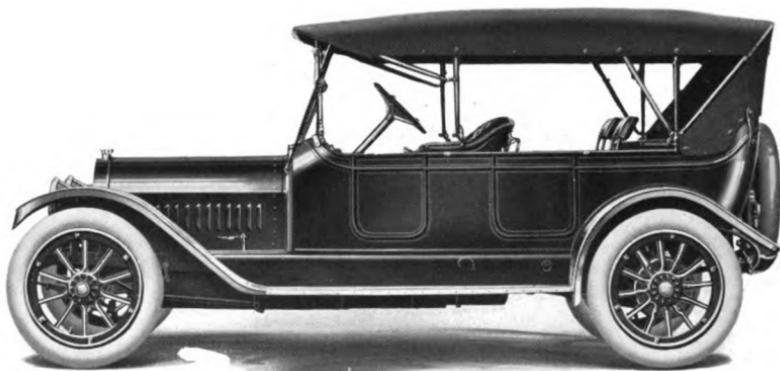


**MODEL: PREMIER 6-60 SERIES X**

COLOR . . . . .	Body, blue-black; running gear, black.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Seven persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5¼ inches.
WHEELBASE . . . . .	140 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56½ or 61 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS: FRONT . . . . .	37 x 5 inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	37 x 5 inches.	ELECTRIC SOURCE . . . . .	High tension dual magneto with storage battery.
BRAKE SYSTEMS . . . . .	Contracting and ex- panding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . . .	(A. L. A. M. rating) 48.6.	TRANSMISSION . . . . .	Selective sliding gear
CYLINDERS . . . . .	Six.	GEAR CHANGES . . . . .	Three forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER . . . . .	Left side drive and center control.

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

**VELIE MOTOR  
VEHICLE  
COMPANY**  
**MOLINE, ILL.**

Price . . . . .	\$2000
Four-Passenger Torpedo . . .	2000
Limousine . . . . .	3000

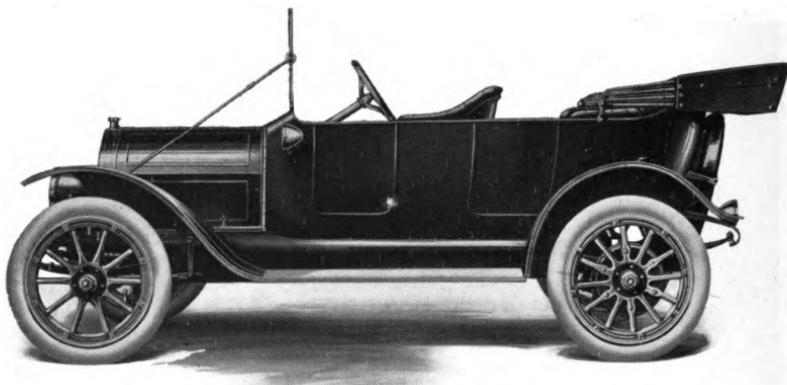


**MODEL: VELIE 40 TOURING CAR—S**

COLOR . . . . .	Dark blue or lake.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4 $\frac{1}{2}$ inches.
CLUTCH . . . . .	Multiple dry disc.	STROKE . . . . .	5 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	118 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 inches.	ELECTRIC SOURCE .	High tension magneto and dry batteries.
REAR . . . . .	36 x 4 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 32.4.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Left side drive and center control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

**ABBOTT MOTOR  
C O M P A N Y**  
**D E T R O I T , M I C H .**

Price . . . . . \$2100  
Five-Passenger Demi-Tonneau 2075

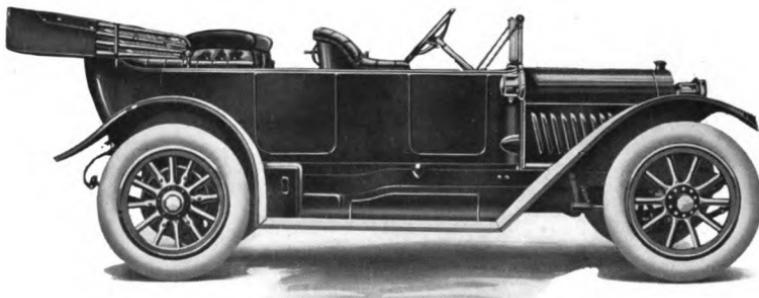


**MODEL: ABBOTT-DETROIT 44-50 TOURING CAR**

COLOR . . . . .	Body, medium blue, Derby red, or Napier green; chassis, black.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	4 $\frac{1}{2}$ inches.
CLUTCH . . . . .	Multiple dry disc.	STROKE . . . . .	5 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	121 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark — dual system.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
REAR . . . . .	36 x 4 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . .	Contracting and ex- panding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 32.4.	GEAR CHANGES . . . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer  
and demountable rims.

**ABBOTT MOTOR  
C O M P A N Y**  
**D E T R O I T , M I C H .**

Price . . . . . \$2075  
Touring Car . . . . . 2100

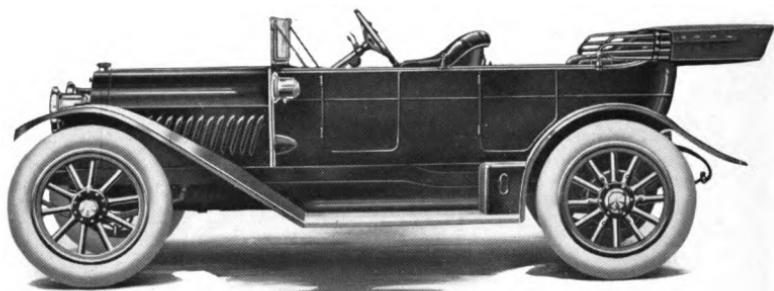


**MODEL: ABBOTT-DETROIT 44-50 DEMI-TONNEAU**

COLOR . . . . .	Body, medium blue, Derby red, or Napier green; chassis, black.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Five persons.	BORE . . . . .	4 $\frac{1}{2}$ inches
CLUTCH . . . . .	Multiple dry disc.	STROKE . . . . .	5 $\frac{1}{2}$ inches.
WHEELBASE . . . . .	121 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark — dual system.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
REAR . . . . .	36 x 4 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . . . .	Contracting and ex- panding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 32.4.	GEAR CHANGES . . . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield,  
speedometer and demountable rims.

**ABBOTT MOTOR  
C O M P A N Y**  
**D E T R O I T , M I C H .**

Price . . . . . \$1800  
Three-Passenger Roadster . 1800

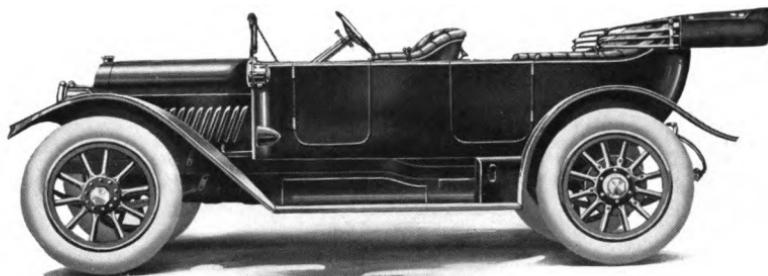


**MODEL: ABBOTT-DETROIT 34-40 TOURING CAR**

COLOR . . . . .	Medium blue, Derby red, or Napier green.	CAST . . . . .	En bloc.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Multiple dry disc.	STROKE . . . . .	5¼ inches.
WHEELBASE . . . . .	116 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark — dual system.
FRONT . . . . .	34 x 4 inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
REAR . . . . .	34 x 4 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	TRANSMISSION .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 27.2.	GEAR CHANGES .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

**ABBOTT MOTOR  
C O M P A N Y  
DETROIT, MICH.**

Price . . . . . \$1800  
Touring Car . . . . . 1800

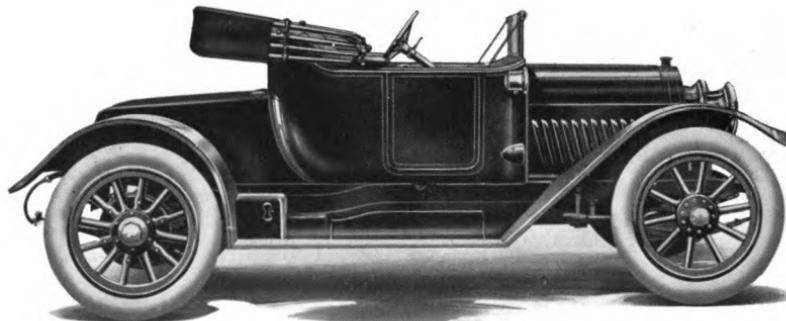


**MODEL: ABBOTT-DETROIT 34-40 ROADSTER**

COLOR . . . . .	Medium blue, Derby red, or Napier green.	CAST . . . . .	En bloc.
SEATING CAPACITY .	Three persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Multiple dry disc.	STROKE . . . . .	5¼ inches.
WHEELBASE . . . . .	116 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark — dual system.
FRONT . . . . .	34 x 4 inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
REAR . . . . .	34 x 4 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 27.2.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

O A K L A N D  
M O T O R C A R  
C O M P A N Y  
P O N T I A C, M I C H.

Price . . . . . \$1600

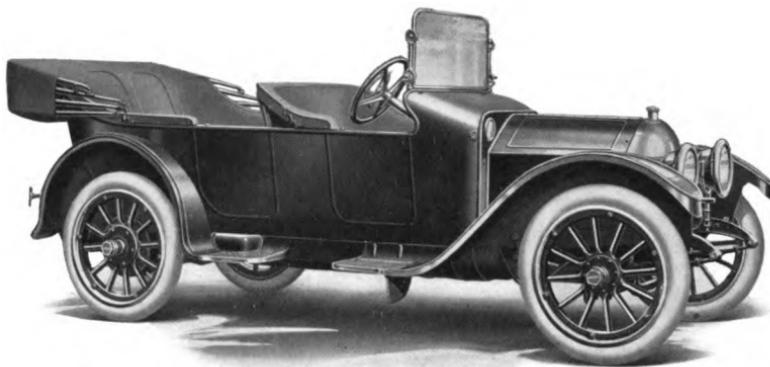


MODEL: OAKLAND 42

COLOR . . . . .	Warship or blue.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Five persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	4¾ inches.
WHEELBASE . . . . .	116 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:			
FRONT . . . . .	34 x 4 inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	34 x 4 inches.	ELECTRIC SOURCE . . . . .	Deaco system.
BRAKE SYSTEMS . . . . .	Internal expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . . .	(A. L. A. M. rating) 27.2.	TRANSMISSION . . . . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . . . .	Three forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.

Price includes electric lighting, self-starter and demountable rims.

OAKLAND  
MOTOR CAR  
COMPANY  
PONTIAC, MICH.

Price . . . . . \$2400

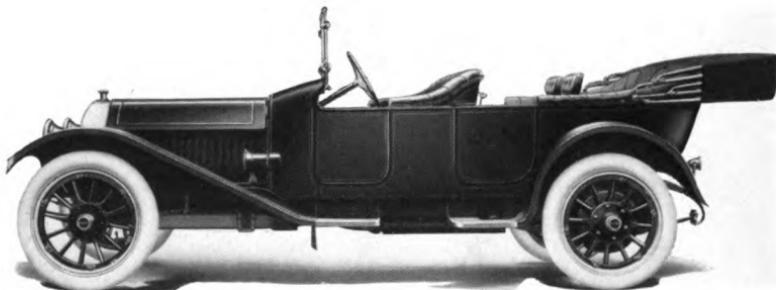

**MODEL: OAKLAND 6-60 GREYHOUND**


COLOR . . . . .	Warship or blue.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Seven persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	4¾ inches.
WHEELBASE . . . . .	130 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	34 x 4 ½ inches.	ELECTRIC SOURCE .	Deaco system.
REAR . . . . .	34 x 4 ½ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . .	Internal expanding on both rear wheels.	TRANSMISSION . . .	Selective sliding gear.
HORSE-POWER . . . .	(A. L. A. M. rating) 40.9.	GEAR CHANGES . . .	Three forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes electric lighting, self-starter and demountable rims.

Digitized by Google

**R E O M O T O R  
C A R C O M P A N Y**  
**L A N S I N G, M I C H.**


Price . . . . . \$1095

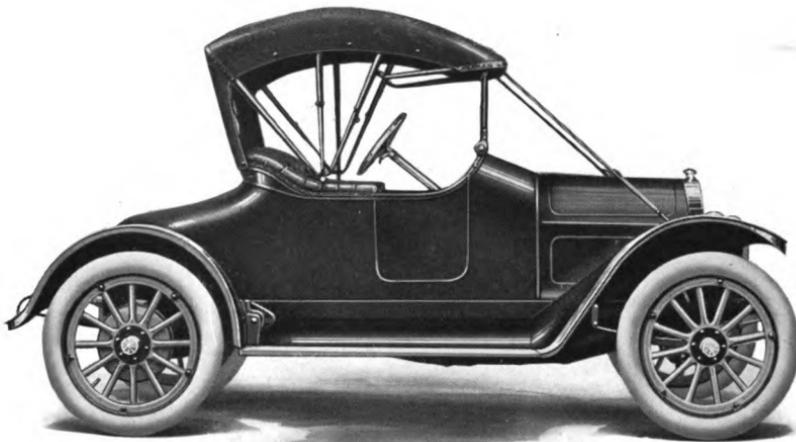

**MODEL: REO THE FIFTH S**

COLOR . . . . .	Body, battleship grey; running gear, black.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Two persons.	BORE . . . . .	4 inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	4½ inches.
WHEELBASE . . . . .	112 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Vertical tube.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	34 x 4 inches.	ELECTRIC SOURCE .	Low tension magneto and dry battery.
REAR . . . . .	34 x 4 inches.	DRIVE . . . . .	Shaft.
Brake Systems . . . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 25.6.	GEAR CHANGES . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Left side drive and center control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes electric lighting and demountable rims.

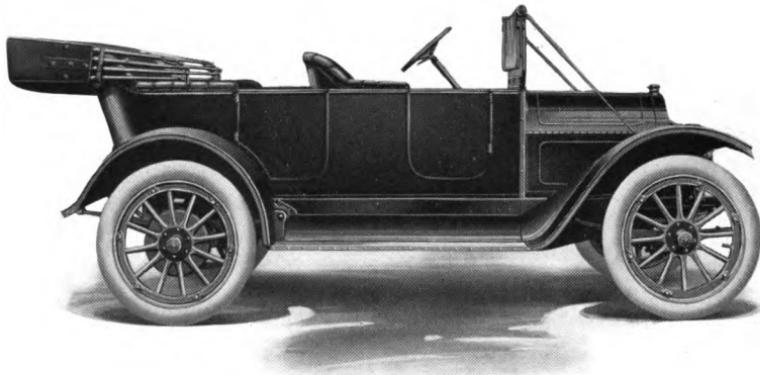

**MODEL: REO. THE FIFTH R-5**

COLOR . . . . .	Body, coach green; running gear, black.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4 inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	4½ inches.
WHEELBASE . . . . .	112 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Vertical tube.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	34 x 4 inches.	ELECTRIC SOURCE .	Low tension magneto and dry battery.
REAR . . . . .	34 x 4 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and ex- panding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 25.6.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Left side drive and center control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes electric lighting and demountable rims.

A U B U R N  
A U T O M O B I L E  
C O M P A N Y  
A U B U R N , I N D .

Price . . . . . \$1525



MODEL: AUBURN 37-L


COLOR . . . . .	Royal Blue.	CAST . . . . .	En bloc.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4 $\frac{1}{4}$ inches.
CLUTCH . . . . .	Disc.	STROKE . . . . .	4 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	115 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	35 x 4 inches.	ELECTRIC SOURCE .	High tension magneto.
REAR . . . . .	35 x 4 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 28.9.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, prestolite tank, windshield, speedometer and demountable rims.

A U B U R N  
A U T O M O B I L E  
C O M P A N Y

A U B U R N , I N D .

Price . . . . .	\$2150
Two-Passenger Roadster . . . . .	2150
Three-Passenger Coupe . . . . .	2600

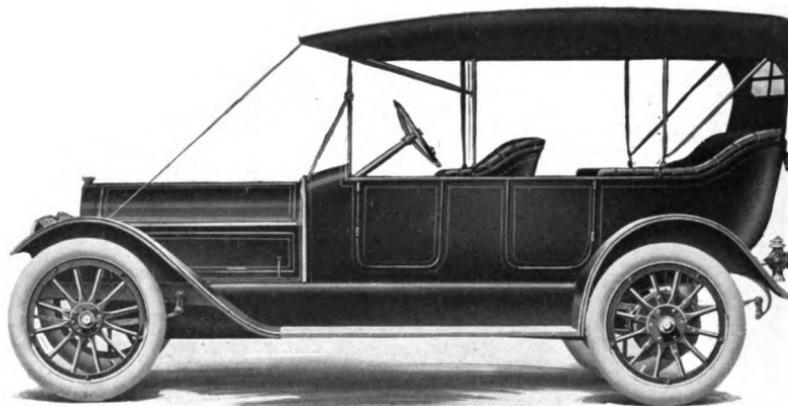


MODEL: AUBURN 6-45

COLOR . . . . .	Royal Blue or Purple Lake.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Five persons.	BORE . . . . .	3 $\frac{1}{4}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	130 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS :		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 inches.	ELECTRIC SOURCE .	High tension magneto
REAR . . . . .	36 x 4 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS .	Contracting and expanding on both rear wheels.	TRANSMISSION .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 33.7.	GEAR CHANGES .	Three forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, windshield, speedometer and demountable rims.

A U B U R N  
A U T O M O B I L E  
C O M P A N Y  
A U B U R N , I N D .

Price . . . . . \$1250  
Two-Passenger Roadster . . . 1250

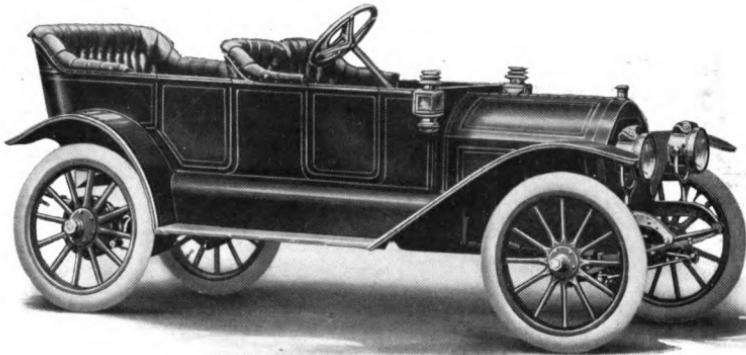


**MODEL: AUBURN 33-L**

COLOR . . . . .	Royal Blue.	ARRANGED . . . . .	Vertically, under hood.
SEATING CAPACITY .	Five persons.	CAST . . . . .	En bloc.
CLUTCH . . . . .	Cone.	BORE . . . . .	3 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	112 inches.	STROKE . . . . .	5 $\frac{1}{4}$ inches.
GAUGE . . . . .	56 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS :			
FRONT . . . . .	34 x 3 $\frac{1}{2}$ inches.	RADIATOR . . . . .	Honeycomb.
REAR . . . . .	34 x 3 $\frac{1}{2}$ inches.	IGNITION . . . . .	Jump spark.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	ELECTRIC SOURCE .	High tension magneto
HORSE-POWER . . .	(A. L. A. M. rating) 22.5.	DRIVE . . . . .	Shaft.
CYLINDERS . . . . .	Four.	TRANSMISSION . . .	Selective sliding gear.
GEAR CHANGES . . . . .			
Three forward, one reverse.			
POSITION OF DRIVER			
Right side drive and right hand control.			

Price includes top, top hood, prestolite tank, windshield and speedometer.

I M P E R I A L  
A U T O M O B I L E  
C O M P A N Y  
J A C K S O N , M I C H .

P r i c e . . . . . \$1875

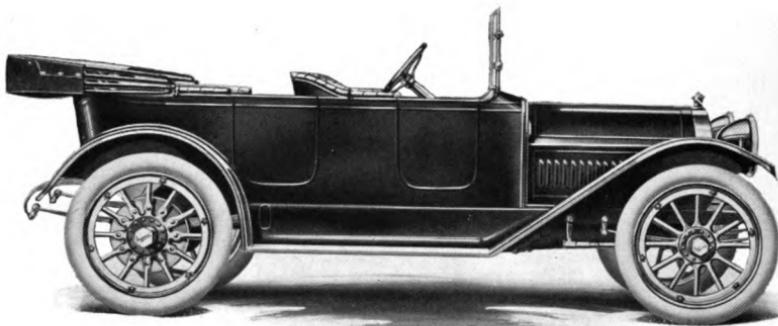


**MODEL: IMPERIAL 44**

COLOR . . . . .	Royal Blue.	CAST . . . . .	In pairs.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4 $\frac{3}{4}$ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	122 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Square tube cellular.
TIRE DIMENSIONS:			
FRONT . . . . .	36 x 4 inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	36 x 4 inches.	ELECTRIC SOURCE .	Low tension magneto and storage battery.
BRAKE SYSTEMS . . .	Expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . .	(A. L. A. M. rating) 36.1.	TRANSMISSION . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . .	Three forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER	Right side drive and left hand control.

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

IMPERIAL  
AUTOMOBILE  
COMPANY  
JACKSON, MICH.

Price . . . . \$1650

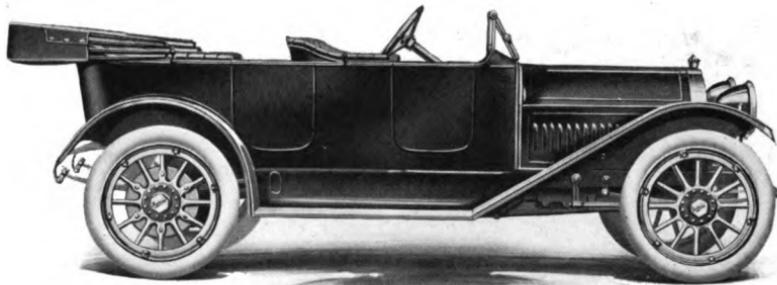


MODEL: IMPERIAL 34

COLOR . . . . .	Brewster Green.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Five persons.	BORE . . . . .	4 $\frac{1}{2}$ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	118 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Square tube cellular.
TIRE DIMENSIONS:			
FRONT . . . . .	34 x 4 inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	34 x 4 inches.	ELECTRIC SOURCE . . . . .	Low tension magneto and storage battery.
BRAKE SYSTEMS . . . . .	Expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . . .	(A. L. A. M. rating) 32.4.	TRANSMISSION . . . . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . . . .	Three forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER . . . . .	Right side drive and left hand control.

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

**IMPERIAL  
AUTOMOBILE  
COMPANY**  
**JACKSON, MICH.**

Price . . . . . \$1285  
Two-Passenger . . . . . 1285

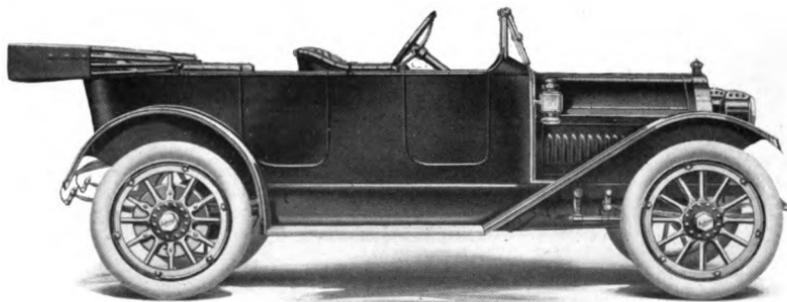


**MODEL: IMPERIAL 32**

COLOR . . . . .	Brewster Green.	CAST . . . . .	En bloc.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5½ inches.
WHEELBASE . . . . .	114 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Square tube cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	34 x 4 inches.	ELECTRIC SOURCE .	Low tension magneto and dry batteries.
REAR . . . . .	34 x 4 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . .	Expanding on both rear wheels.	TRANSMISSION . . .	Selective sliding gear.
HORSE-POWER . . . .	(A. L. A. M. rating) 27.2.	GEAR CHANGES . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and left hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, prestolite tank, windshield, speedometer and demountable rims.

THE S. G. V.  
C O M P A N Y  
R E A D I N G , P A .

Price	.....	\$2500
Four-Passenger Touring Car	.....	2500
Runabout	.....	2500
Limousine Brougham	.....	3500
Landa Brougham	.....	3500
Limousine	.....	3500
Landaulet	.....	3500
Dipped Roof Models	.....	3750

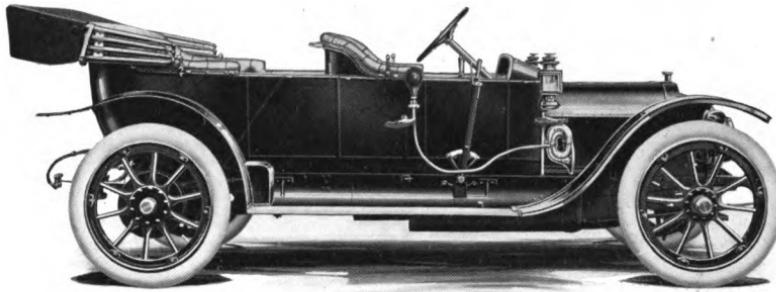


**MODEL: S. G. V. TOURING CAR "A"**

COLOR . . . . .	Optional.	CAST . . . . .	En bloc.
SEATING CAPACITY .	Five persons.	BORE . . . . .	3 $\frac{1}{4}$ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	4 $\frac{1}{2}$ inches.
WHEELBASE . . . . .	116 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	34 x 4 inches.	ELECTRIC SOURCE .	High tension magneto
REAR . . . . .	34 x 4 inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . .	Contracting on transmission and expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . . .	(A. L. A. M. rating) 22.5.	GEAR CHANGES . .	Four forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes prestolite tank and demountable rims.

THE S. G. V.  
C O M P A N Y  
R E A D I N G , P A .

Price . . . . .	\$4250
Touring Car . . . . .	3250
Runabout . . . . .	3000
Landau Brougham . . . . .	4000
Limousine Brougham . . . . .	4000
Limousine . . . . .	4000
Landaulet . . . . .	4000

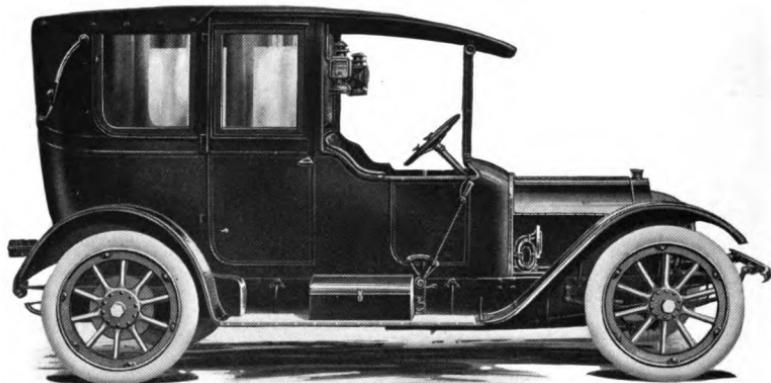


**MODEL: S. G. V. DIPPED ROOF LANDAULET "D"**

COLOR . . . . .	Optional.	CAST . . . . .	En bloc.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4 inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5½ inches.
WHEELBASE . . . . .	118 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:			
FRONT . . . . .	35 x 4 ½ inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	35 x 4 ½ inches.	ELECTRIC SOURCE .	High tension magneto.
BRAKE SYSTEMS . . .	Contracting on transmission and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . . .	(A. L. A. M. rating) 25.6.	TRANSMISSION . . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . .	Four forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER	Right side drive and right hand control.

Price includes prestolite tank and demountable rims.

W A R R E N  
MOTOR CAR  
C O M P A N Y  
DETROIT, MICH.

Price . . . . . \$2600

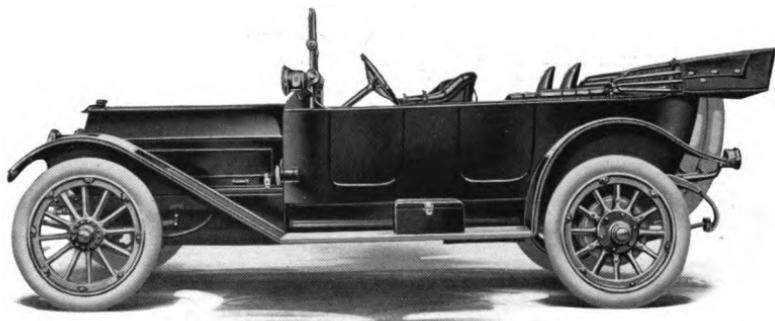


MODEL: WARREN "RESOLUTE"

COLOR . . . . .	Blue or maroon.	CAST . . . . .	En bloc.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4 inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 inches.
WHEELBASE . . . . .	130 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE .	High tension magneto and dry batteries.
REAR . . . . .	36 x 4 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 38.4.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER	Right side drive, and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

W A R R E N  
MOTOR CAR  
C O M P A N Y  
DETROIT, MICH.

Price . . . . . \$1850

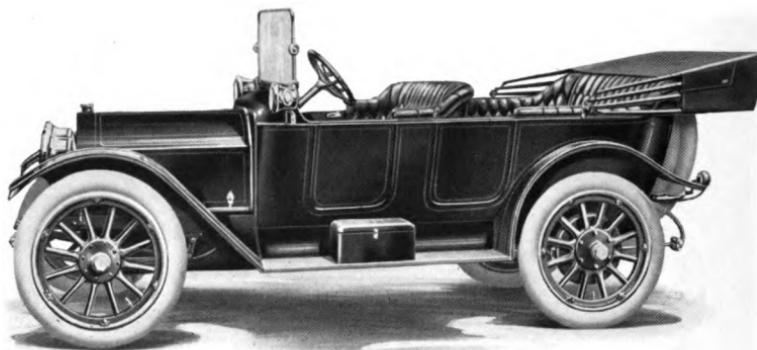


MODEL: WARREN "PILGRIM"

COLOR . . . . .	Blue or gray.	CAST . . . . .	En bloc.
SEATING CAPACITY . . . . .	Five persons.	BORE . . . . .	4 $\frac{1}{4}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	4 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	116 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 inches.	ELECTRIC SOURCE . . . . .	High tension magneto and dry batteries.
REAR . . . . .	36 x 4 inches.	DRIVE . . . . .	Shaft.
Brake Systems . . . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 28.9.	GEAR CHANGES . . . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, windshield, speedometer and demountable rims.

INTER-STATE  
AUTOMOBILE  
COMPANY  
MUNCIE, IND.

Price . . . . . \$2750

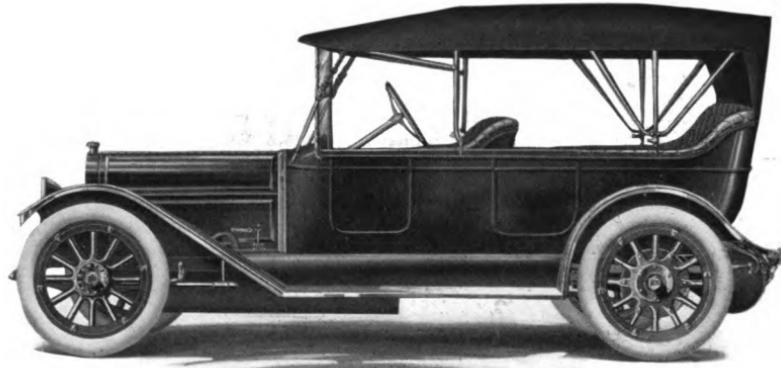

**MODEL: INTER-STATE TOURING CAR 45**


COLOR . . . . .	Dark green or dark blue.	CAST . . . . .	En bloc.
SEATING CAPACITY .	Five persons.	BORE . . . . .	4 inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5 inches.
WHEELBASE . . . . .	132 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Double magneto and battery.
FRONT . . . . .	36 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE .	High tension magneto and dynamo storage system.
REAR . . . . .	36 x 4 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . . . .	Internal expanding on both rear wheels.	TRANSMISSION . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 38.4.	GEAR CHANGES . . .	Four forward, one reverse.
CYLINDERS . . . . .	Six.	POSITION OF DRIVER .	Left side drive and center control
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

**A M E R I C A N  
M O T O R S  
C O M P A N Y**

INDIANAPOLIS, IND.

Price . . . . .	\$4500
Four-Passenger Touring Car . . .	4250
Six-Passenger Limousine . . . . .	6000

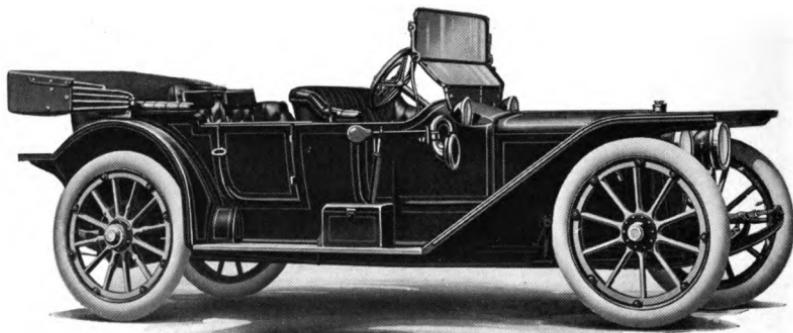

**MODEL: "AMERICAN TRAVELER"—56-A**


COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Six persons.	BORE . . . . .	5½ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5½ inches.
WHEELBASE . . . . .	140 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	41 x 4½ inches.	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
REAR . . . . .	41 x 4½ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . . . .	Double internal expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A.L.A.M. rating) 46.	GEAR CHANGES . . . . .	Four forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, electric lighting, electric self-starter, windshield, speedometer and demountable rims.

**A M E R I C A N  
M O T O R S  
C O M P A N Y**

INDIANAPOLIS, IND.

Price . . . . .	\$2350
Two-Passenger Runabout . . .	2350
Five-Passenger Coupe . . .	3500

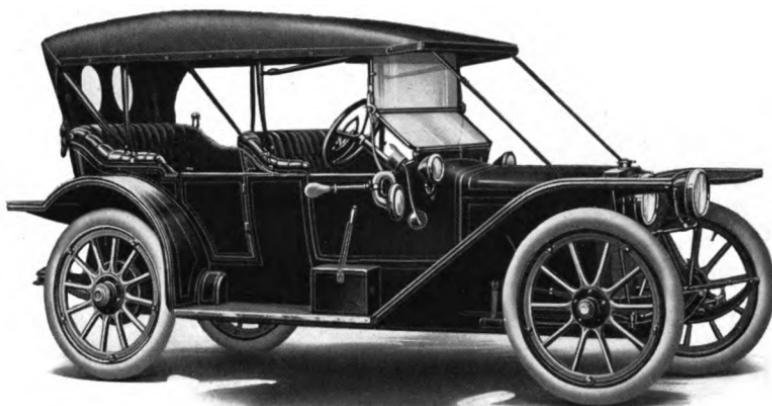

**MODEL: "AMERICAN TOURIST"—34-A**


COLOR . . . . .	Body, American wine, blue-black or French gray; fenders, black; running gear, gray.	ARRANGED . . . . .	Vertically, under hood.
SEATING CAPACITY .	Four persons.	CAST . . . . .	En bloc.
CLUTCH . . . . .	Cone.	BORE . . . . .	4 $\frac{1}{2}$ inches.
WHEELBASE . . . . .	118 inches.	STROKE . . . . .	5 inches.
GAUGE'. . . . .	56 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Cellular.
FRONT . . . . .	37 x 4 inches.	IGNITION . . . . .	Jump spark.
REAR. . . . .	37 x 4 inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
BRAKE SYSTEMS . .	Internal expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . .	(A. L. A. M. rating) 32.4.	TRANSMISSION . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . .	Three forward, one reverse.
POSITION OF DRIVER		POSITION OF DRIVER	Right side drive and right hand control.

Price includes top, top hood, electric lighting, self-starter, windshield, speedometer and demountable rims.

**A M E R I C A N  
M O T O R S  
C O M P A N Y**

INDIANAPOLIS, IND.

Price . . . . . \$1475  
Three-Passenger Colonial Coupe 2000

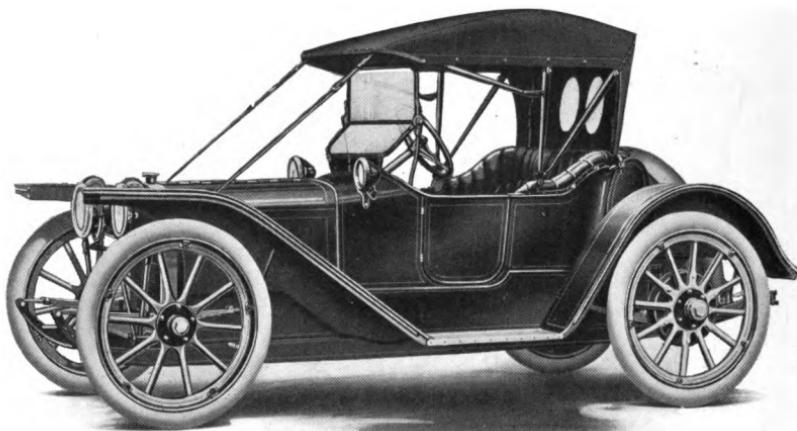

**MODEL: "AMERICAN SCOUT"—22-B**


COLOR . . . . .	Body, American wine; running gear, gray.	CAST . . . . .	En bloc.
SEATING CAPACITY .	Two persons.	BORE . . . . .	4 inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 inches.
WHEELBASE . . . . .	105 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Cellular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 3½ inches.	ELECTRIC SOURCE .	High tension magneto and storage battery.
REAR . . . . .	36 x 3½ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . .	Internal expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . .	(A. L. A. M. rating) 25.6.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes top, top hood, prestolite tank, electric lighting, self-starter, windshield, speedometer and demountable rims.

R E G A L  
MOTOR CAR  
C O M P A N Y

DETROIT, MICH.

Price . . . . .	\$950
Roadster . . . . .	900
Coupe . . . . .	1250

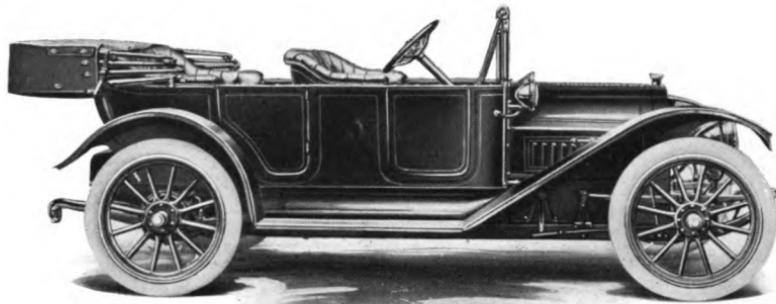


**MODEL: REGAL UNDERSLUNG TOURING CAR—"T"**

COLOR . . . . .	Dark blue with light blue striping.	CAST . . . . .	En bloc.
SEATING CAPACITY .	Four persons.	BORE . . . . .	3 $\frac{3}{4}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	4 $\frac{1}{2}$ inches.
WHEELBASE . . . . .	108 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 or 60 inches.	RADIATOR . . . . .	Vertical tubular.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	32 x 3 $\frac{1}{2}$ inches.	ELECTRIC SOURCE .	High tension magneto and dry batteries.
REAR . . . . .	32 x 3 $\frac{1}{2}$ inches.	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . . .	Selective sliding gear.
HORSE-POWER . . . .	25.	GEAR CHANGES . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER .	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes electric lighting and demountable rims.

**IDEAL MOTOR  
CAR COMPANY**  
**INDIANAPOLIS, IND.**

Price . . . . . \$2300

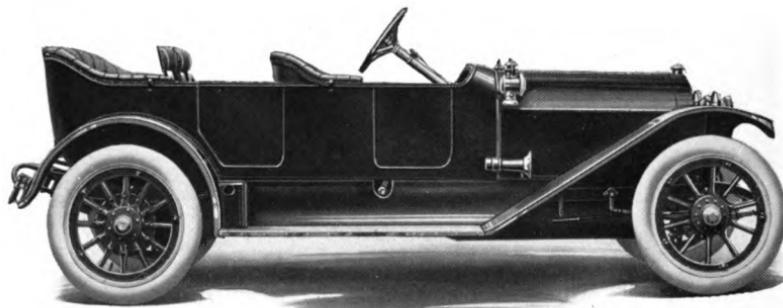


**MODEL: STUTZ TOURING CAR—6-B**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
SEATING CAPACITY . . . . .	Six persons.	BORE . . . . .	4 $\frac{1}{4}$ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5 inches.
WHEELBASE . . . . .	130 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:			
FRONT . . . . .	34 x 4 $\frac{1}{2}$ inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	34 x 4 $\frac{1}{2}$ inches.	ELECTRIC SOURCE . . . . .	High tension magneto.
BRAKE SYSTEMS . . . . .	Internal expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . . . .	(A. L. A. M. rating) 43.8.	TRANSMISSION . . . . .	Selective sliding gear.
CYLINDERS . . . . .	Six.	GEAR CHANGES . . . . .	Three forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.

Price includes electric lighting and demountable rims.

THE GARFORD  
C O M P A N Y  
ELYRIA, OHIO

Price, Chassis . . . . \$2850

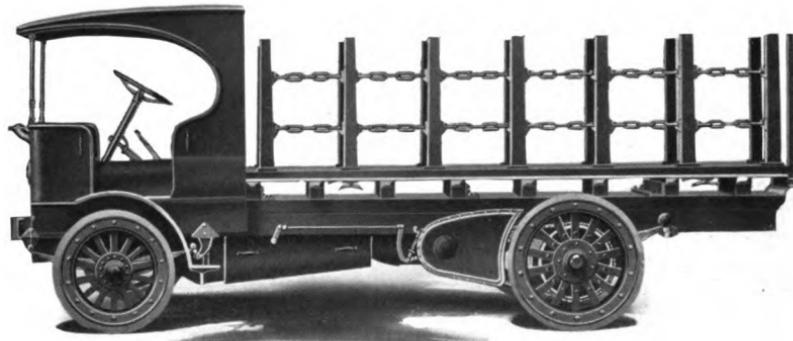


MODEL: GARFORD TWO-TON TRUCK 76

COLOR . . . .	Optional.	ARRANGED . . . .	Vertically, under hood.
CARRYING CAPACITY	Two tons	CAST . . . .	En bloc.
CLUTCH . . . .	Cone.	BORE . . . .	4½ inches.
WHEELBASE . . . .	136 inches.	STROKE . . . .	5¾ inches.
GAUGE . . . .	Front, 66 inches; rear, 66¾ inches.	COOLING . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . .	Vertical tube.
FRONT . . . .	36 x 4 inches (single).	IGNITION . . . .	Make-and-break.
REAR . . . .	40 x 4 inches (dual).	ELECTRIC SOURCE . . . .	Low tension magneto and storage battery.
Brake Systems . . . .	Contracting on transmission and expanding on both rear wheels.	DRIVE . . . .	Double side chain.
HORSE-POWER . . . .	(A. L. A. M. rating) 28.9.	TRANSMISSION . . . .	Selective gear.
CYLINDERS . . . .	Four.	GEAR CHANGES . . . .	Three forward, one reverse.
Price includes cab, windshield, storm curtains, prestolite tank, demountable rims and hub-o-meter.			

THE GARFORD  
C O M P A N Y  
ELYRIA, OHIO

Price, Chassis . \$3500

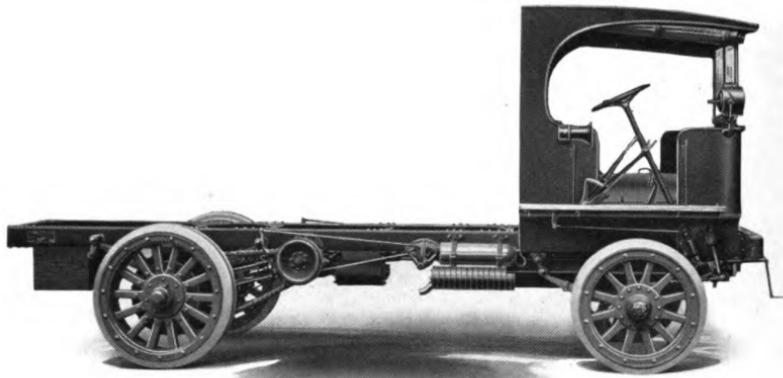


**MODEL: GARFORD THREE-TON TRUCK J**

COLOR . . . . .	Optional.	CAST . . . . .	En bloc.
CARRYING CAPACITY	Three tons.	BORE . . . . .	4 $\frac{1}{4}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	128 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	Front, 61 inches; rear, 63 inches.	RADIATOR . . . . .	Vertical tube.
TIRE DIMENSIONS:		IGNITION . . . . .	Make-and-break.
FRONT . . . . .	36 x 5 inches (single).	ELECTRIC SOURCE . . . . .	Low tension magneto and storage battery.
REAR . . . . .	40 x 4 inches (dual).	DRIVE . . . . .	Double side chain.
Brake Systems . . . . .	Contracting on jack shaft and both rear wheels.	TRANSMISSION . . . . .	Selective gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 28.9.	GEAR CHANGES . . . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER . . . . .	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes cab, windshield, storm curtains, prestolite tank, one searchlight, demountable  
rims and hub-o-meter.

THE GARFORD  
C O M P A N Y  
E L Y R I A , O H I O

Price, Chassis . \$4500

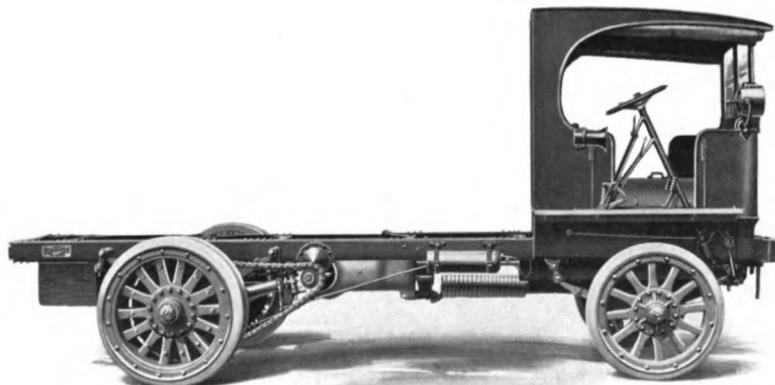


**MODEL: GARFORD FIVE-TON TRUCK D**

COLOR . . . . .	Optional.	CAST . . . . .	En bloc.
CARRYING CAPACITY	Five tons.	BORE . . . . .	4 $\frac{1}{4}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	128 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	Front, 61 inches; rear, 69 $\frac{1}{4}$ inches.	RADIATOR . . . . .	Vertical tube.
TIRE DIMENSIONS:		IGNITION . . . . .	Make-and-break.
FRONT . . . . .	36 x 6 inches (single).	ELECTRIC SOURCE . . .	Low tension magneto and storage battery.
REAR . . . . .	40 x 6 inches (dual).	DRIVE . . . . .	Double side chain.
BRAKE SYSTEMS . . .	Contracting on transmission and both rear wheels.	TRANSMISSION . . .	Selective gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 28.9.	GEAR CHANGES . . .	Four forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes cab, windshield, storm curtains, prestolite tank, one searchlight, demountable rims and hub-o-meter.

**LOCOMOBILE  
COMPANY OF  
AMERICA**  
**B R I D G E P O R T**  
**C O N N E C T I C U T**

Price, Chassis . . . . . \$4800

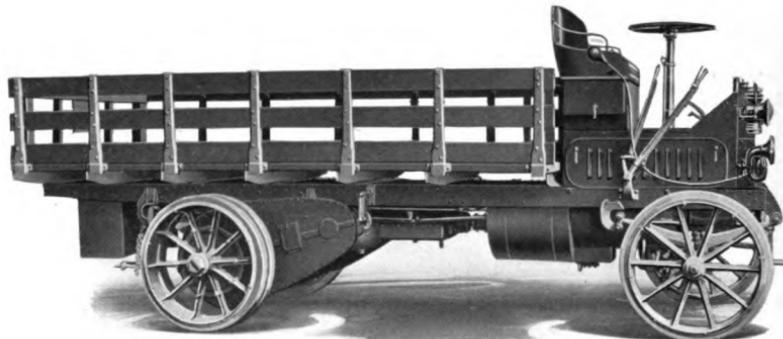

**MODEL: LOCOMOBILE FIVE-TON TRUCK "A"**


COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
CARRYING CAPACITY	10,000 pounds.	BORE . . . . .	5 inches.
CLUTCH . . . . .	Dry Multiple disc.	STROKE . . . . .	6 inches.
WHEELBASE . . . . .	140 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	Front, 65 inches; rear, 70 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	40 x 6 inches (single)	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
REAR . . . . .	40 x 6 inches (dual)	DRIVE . . . . .	Double side chain.
BRAKE SYSTEMS . . . . .	Contracting and ex-panding on both rear wheels.	TRANSMISSION . . . . .	Selective gear.
HORSE-POWER . . . . .	(A.L.A.M. rating) 40.	GEAR CHANGES . . . . .	Four forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under foot boards.		

Price includes hub-odometer and demountable rims.

MACK BROS.  
MOTOR CAR CO.

BROADWAY & 57th ST.  
NEW YORK, N. Y.

Price, Chassis . . . . . \$3000

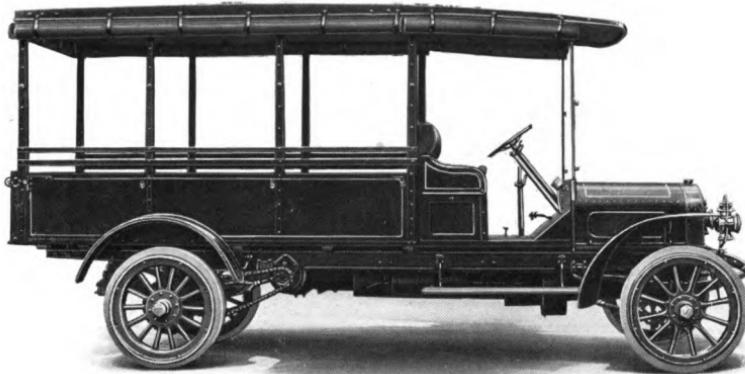


MODEL: MACK 2-TON TRUCK

COLOR . . . . .	Optional.	ARRANGED . . . . .	Vertically, under hood
CARRYING CAPACITY	2 tons.	CAST . . . . .	In pairs.
CLUTCH . . . . .	Multiple disc.	BORE . . . . .	4½ inches.
WHEELBASE . . . . .	126, 138, 150 or 162 inches.	STROKE . . . . .	5½ inches.
GAUGE . . . . .	59 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Honeycomb.
FRONT . . . . .	36 x 4 inches (single)	IGNITION . . . . .	Jump spark.
REAR . . . . .	36 x 3½ inches (dual)	ELECTRIC SOURCE . . . . .	High tension magneto
BRAKE SYSTEMS . . . . .	Contracting on differential and expanding on both rear wheels.	DRIVE . . . . .	Double side chains.
HORSE-POWER . . . . .	(A. L. A. M. rating) 32.4.	TRANSMISSION . . . . .	Mack patent non-sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . . . .	Three forward, one reverse.
		POSITION OF DRIVER . . . . .	Left side drive and center control.

**SAURER MOTOR  
C O M P A N Y**

BROADWAY & 57th ST.  
NEW YORK, N. Y.

Price, Chassis . . . . \$6000

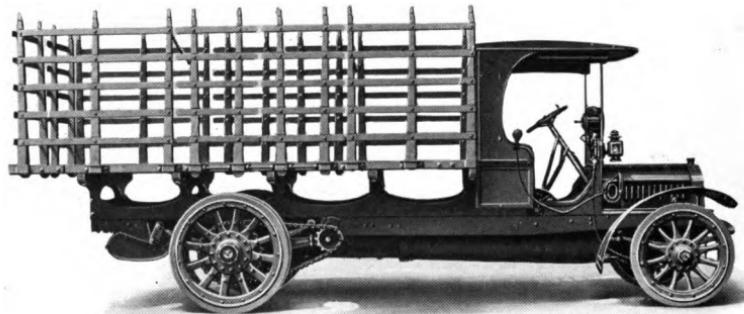


**MODEL: SAURER 6½-TON TRUCK**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
CARRYING CAPACITY	6½ tons.	BORE . . . . .	4¾ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5½ inches.
WHEELBASE . . . . .	159 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	67 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 5 inches (single)	ELECTRIC SOURCE . . .	High tension magneto
REAR . . . . .	42 x 6 inches (dual)	DRIVE . . . . .	Double side chain.
BRAKE SYSTEMS . . .	Air brake, and contracting on differential and expanding on both rear wheels.	TRANSMISSION . . . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 30.6.	GEAR CHANGES . . . . .	Four forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

**HEWITT MOTOR  
C O M P A N Y**

**BROADWAY & 57th ST.  
NEW YORK, N. Y.**

**Price, Chassis . . . \$5500**

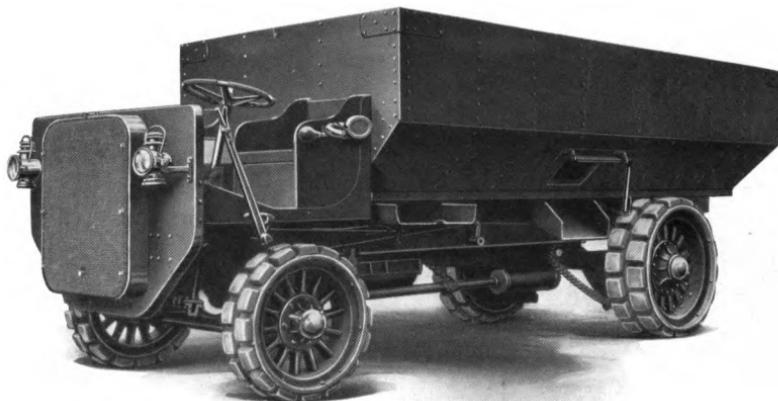

**MODEL: HEWITT 10-TON TRUCK**

**COLOR . . . . .** Optional.

**CARRYING CAPACITY** 10 tons.

**CLUTCH. . . . .** Cone.

**WHEELBASE . . . . .** 138 to 164 inches.

**GAUGE . . . . .** 68 inches.

**TIRE DIMENSIONS :**

FRONT . . . . . 36 x 5 inches (single)

REAR. . . . . 44½ x 7 inches (dual)

**BRAKE SYSTEMS . . . . .** Service brake on gear box and expanding on both rear wheels.

**HORSE-POWER . . . . .** (A. L. A. M. rating) 28.9.

**CYLINDERS . . . . .** Four.

**ARRANGED . . . . .** Vertically, between drivers' seats.

**CAST . . . . .** In pairs.

**BORE . . . . .** 4½ inches.

**STROKE . . . . .** 6 inches.

**COOLING . . . . .** Water.

**RADIATOR . . . . .** Cellular.

**IGNITION . . . . .** Jump spark.

**ELECTRIC SOURCE . . . . .** High tension magneto

**DRIVE . . . . .** Double side chains.


**TRANSMISSION . . . . .** Planetary.

**GEAR CHANGES . . . . .** Two forward, one reverse.

**POSITION OF DRIVER** Left side drive and left hand control.

THE WHITE  
C O M P A N Y  
CLEVELAND, OHIO

Price, Chassis . . . . . \$4500  
With Power Dumping Body . . . \$5200

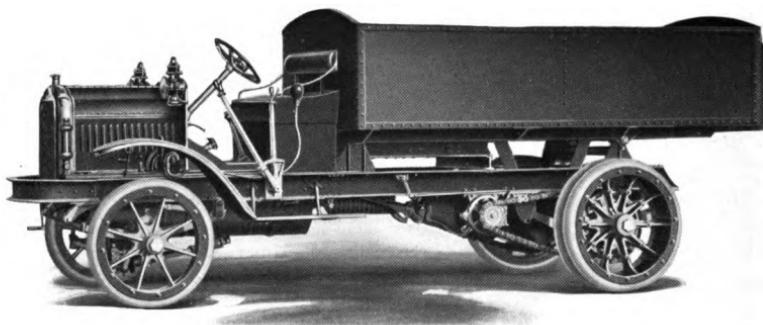


**MODEL: WHITE FIVE-TON POWER-DRIVEN DUMPING TRUCK**

COLOR . . . . .	Red.	CAST . . . . .	En bloc.
CARRYING CAPACITY	Five tons.	BORE . . . . .	4 $\frac{1}{4}$ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	145 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	Front, 63 $\frac{5}{8}$ inches; rear, 63 $\frac{3}{4}$ inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 5 inches (solid)	ELECTRIC SOURCE . . . . .	High tension mag-
REAR . . . . .	40 x 6 inches (dual solid)	neto	
BRAKE SYSTEMS . . .	Contracting on jack- shaft and expanding on both rear wheels.	DRIVE . . . . .	Double side chain.
HORSE-POWER . . . . .	40.	TRANSMISSION . . . . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . . . .	Four forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.		

Price includes demountable rims.

THE WHITE  
C O M P A N Y  
CLEVELAND, OHIO

Price, Chassis . . . . . \$3700  
With Standard Body . . . . . 3850

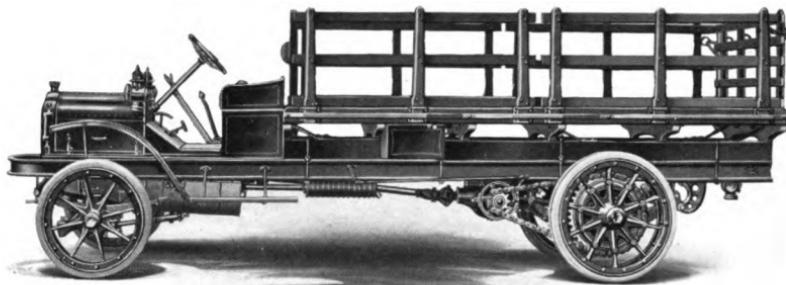


MODEL: WHITE THREE-TON TRUCK

COLOR . . . . .	Red.	CAST . . . . .	En bloc.
CARRYING CAPACITY	Three tons.	BORE . . . . .	3½ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5½ inches.
WHEELBASE . . . . .	163 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	Front, 63¾ inches; rear, 61½ inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 5 inches (solid)	ELECTRIC SOURCE . . .	High tension mag- neto.
REAR . . . . .	40 x 4 inches (dual solid)	DRIVE . . . . .	Double side chain.
BRAKE SYSTEMS . . .	Contracting on jack- shaft and expanding on both rear wheels.	TRANSMISSION . . .	Selective sliding gear.
HORSE-POWER . . .	30.	GEAR CHANGES . . .	Four forward, one reverse.
CYLINDERS . . . . .	Four.		
ARRANGED . . . . .	Vertically, under hood.		

Price includes demountable rims.

THE WHITE  
COMPANY  
CLEVELAND, OHIO

Price, Chassis . . . . . \$3000  
With Standard Body . . . . . 3150

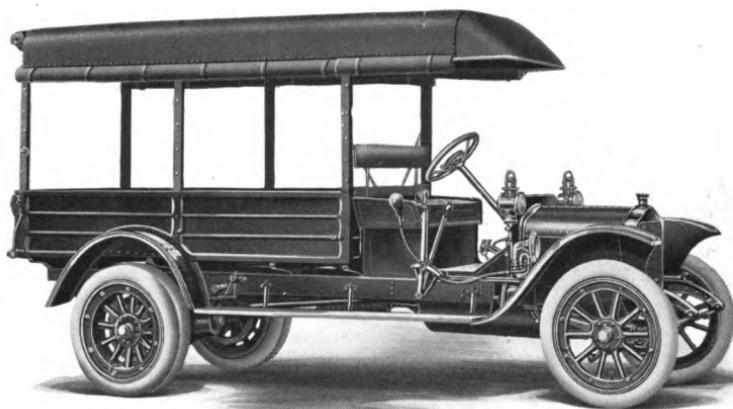


**MODEL: WHITE ONE-AND-ONE-HALF-TON TRUCK**

COLOR . . . . .	Red.	CAST . . . . .	En bloc.
CARRYING CAPACITY	1½ tons.	BORE . . . . .	3¾ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	5⅛ inches.
WHEELBASE . . . . .	144 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56 inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4½ inches (pneumatic).	ELECTRIC SOURCE .	High tension magneto.
REAR . . . . .	36 x 4½ inches (dual pneumatic).	DRIVE . . . . .	Shaft.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . . . .	30.	GEAR CHANGES . .	Four forward, one reverse.
CYLINDERS . . . . .	Four.		
ARRANGED . . . . .	Vertically, under hood.		

Price includes demountable rims.

THE WHITE  
COMPANY  
CLEVELAND, OHIO

Price, Chassis . . . . . \$2100  
With Standard Body . . . . . 2250

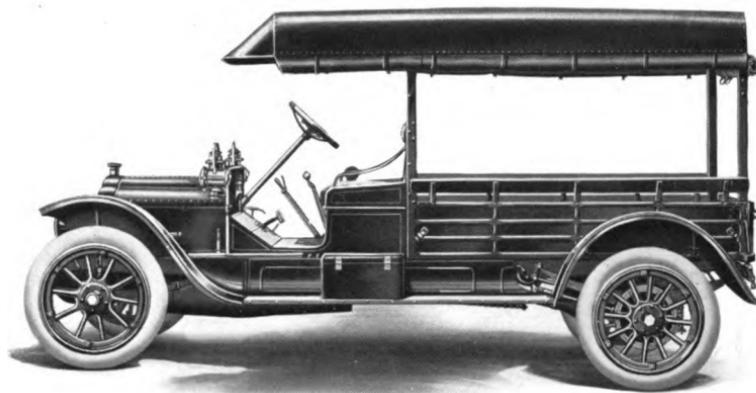


**MODEL: WHITE THREE-QUARTER-TON TRUCK**

COLOR . . . . .	Chassis, red; body, dark green.	ARRANGED . . . . .	Vertically, under hood.
CARRYING CAPACITY . . . . .	1,500 pounds.	CAST . . . . .	En bloc.
CLUTCH . . . . .	Cone.	BORE . . . . .	3½ inches.
WHEELBASE . . . . .	120 inches.	STROKE . . . . .	5⅓ inches.
GAUGE . . . . .	56 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:			
FRONT . . . . .	34 x 4½ inches (pneumatic).	RADIATOR . . . . .	Honeycomb.
REAR . . . . .	34 x 4½ inches (pneumatic).	IGNITION . . . . .	Jump spark.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	ELECTRIC SOURCE . . . . .	High tension magneto.
HORSE-POWER . . . . .	30.	DRIVE . . . . .	Shaft.
CYLINDERS . . . . .	Four.	TRANSMISSION . . . . .	Selective sliding gear.
		GEAR CHANGES . . . . .	Four forward, one reverse.

Price includes demountable rims and prestolite tank.

THE WHITE  
COMPANY  
CLEVELAND, OHIO

Price, Chassis . . . . . \$4500  
With Standard Body . . . . . 4700

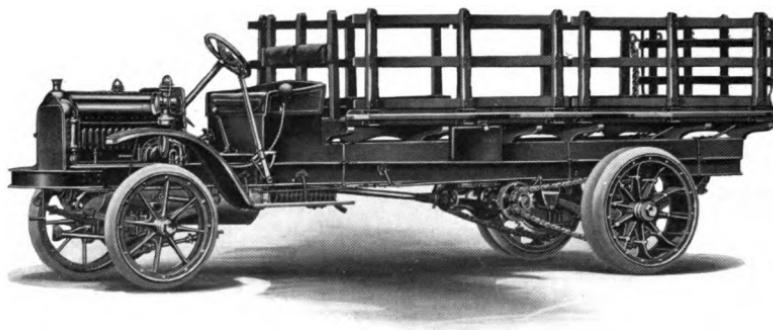


MODEL: WHITE FIVE-TON TRUCK

COLOR . . . . .	Red.	ARRANGED . . . . .	Vertically, under hood.
CARRYING CAPACITY	Five tons.	CAST . . . . .	En bloc.
CLUTCH . . . . .	Cone.	BORE . . . . .	4 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	165 inches.	STROKE . . . . .	5 $\frac{3}{4}$ inches.
GAUGE . . . . .	Front, 64 inches; rear, 64 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Honeycomb.
FRONT . . . . .	36 x 5 inches (solid)	IGNITION . . . . .	Jump spark.
REAR . . . . .	40 x 6 inches (dual solid)	ELECTRIC SOURCE . . . . .	High tension magneto.
BRAKE SYSTEMS . . . . .	Contracting on jack-shaft and expanding on both rear wheels.	DRIVE . . . . .	Double side chain.
HORSE-POWER . . . . .	40.	TRANSMISSION . . . . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . . . .	Four forward, one reverse.

NORDYKE & MARMON  
C O M P A N Y  
INDIANAPOLIS, IND.

Price, Chassis . . . . . \$2500

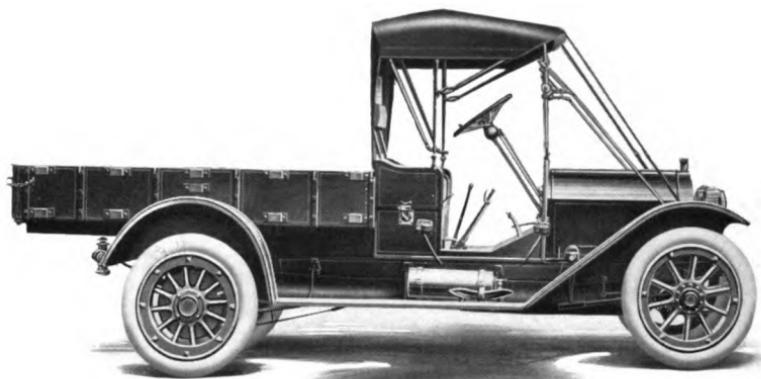


**MODEL: MARMON LIGHT DELIVERY TRUCK**

COLOR . . . . .	In lead.	CAST . . . . .	In pairs.
CARRYING CAPACITY	1500 pounds.	BORE . . . . .	4 inches.
CLUTCH. . . . .	Cone.	STROKE . . . . .	5 inches.
WHEELBASE . . . . .	120 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	56½ inches.	RADIATOR . . . . .	Honeycomb.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	32 x 4 inches.	ELECTRIC SOURCE	High tension magneto and dry batteries.
REAR. . . . .	32 x 4 inches.	DRIVE . . . . .	Shaft.
Brake Systems . . . . .	Internal expanding on both rear wheels.	TRANSMISSION . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 25.6.	GEAR CHANGES . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Right side drive and right hand control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes prestolite tank and self-starter.

P A C K A R D  
M O T O R C A R  
C O M P A N Y  
D E T R O I T , M I C H .

Price, Chassis . . . \$4500

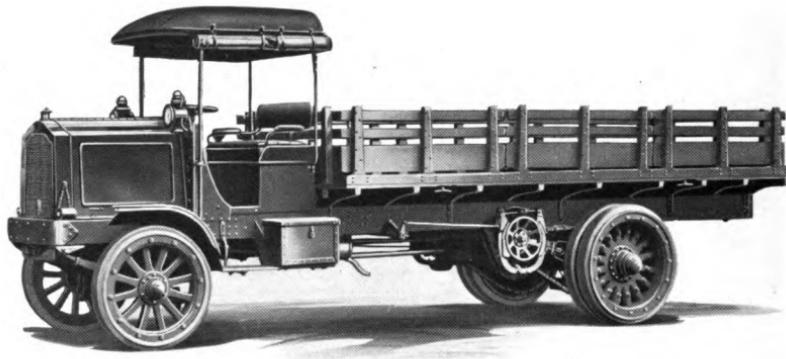


**MODEL: PACKARD FIVE-TON TRUCK**

COLOR . . . . .	Body, Packard blue striped with cream yellow; frame, bonnet, fenders, etc., Packard blue; wheels, cream yellow striped with black.	CYLINDERS . . . . .	Four.
ARRANGED . . . . .	Vertically, under hood.	CAST . . . . .	In pairs.
CARRYING CAPACITY . . . . .	10,000 pounds.	BORE . . . . .	5 inches.
CLUTCH . . . . .	Dry plate.	STROKE . . . . .	5½ inches.
WHEELBASE . . . . .	168 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Cellular.
FRONT . . . . .	36 x 6 inches (single)	IGNITION . . . . .	Jump spark.
REAR . . . . .	40 x 6 inches (dual)	ELECTRIC SOURCE . . . . .	High tension magneto.
BRAKE SYSTEMS . . .	Contracting on countershaft ends and expanding on both rear wheels.	DRIVE . . . . .	Double side chain.
HORSE-POWER . . . . .	(A.L.A.M. rating) 40.	TRANSMISSION . . . . .	Progressive sliding gear.
		GEAR CHANGES . . . . .	Three forward, one reverse.
		POSITION OF DRIVER . . . . .	Right side drive and right hand control.

**POPE MANU-  
FACTURING  
COMPANY**  
**HARTFORD, CONN.**

Price, Chassis . . . . . \$3350  
With Platform and Stake Body . . . 3550

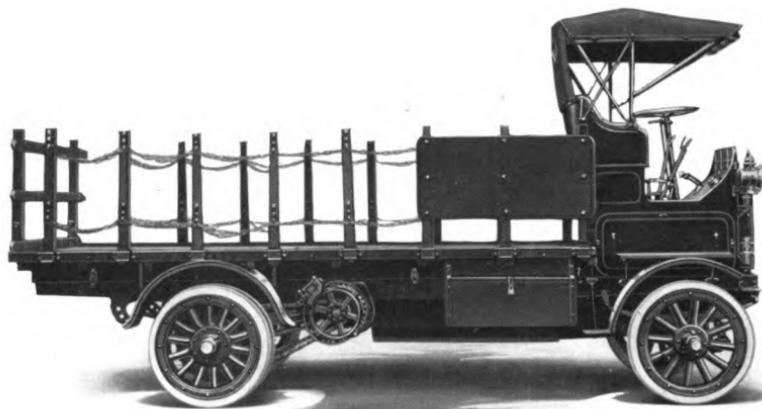


**MODEL: POPE-HARTFORD THREE-TON TRUCK**

COLOR . . . . .	Optional.	ARRANGED . . . . .	Vertically.
CARRYING CAPACITY	Three tons.	CAST . . . . .	In pairs.
CLUTCH . . . . .	Cone.	BORE . . . . .	4 $\frac{3}{4}$ inches.
WHEELBASE . . . . .	138 $\frac{1}{2}$ inches.	STROKE . . . . .	5 $\frac{1}{2}$ inches.
GAUGE . . . . .	67 inches, front; 68 inches, rear.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Planetic.
FRONT . . . . .	36 x 6 inches (single solid).	IGNITION . . . . .	Jump spark.
REAR . . . . .	36 x 4 inches (dual solid).	ELECTRIC SOURCE . . . . .	High tension magneto and storage battery.
BRAKE SYSTEMS . . . . .	Contracting on jack-shaft and expanding on both rear wheels.	DRIVE . . . . .	Double side chain.
HORSE-POWER . . . . .	50.	TRANSMISSION . . . . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . . . .	Four forward, one reverse.
POSITION OF DRIVER Left side drive and center control.			

Price includes top and hub-odometer.

THE AUTOCAR  
C O M P A N Y  
A R D M O R E , P A .

Price, Chassis . . . . .	\$2150
With Piano Body . . . . .	2400
With Straight Side Closed Body . . . . .	2375
With Double Curved Closed Body . . . . .	2375
With Casket Body . . . . .	2600
With Hotel and Station Bus . . . . .	2900
With Coach . . . . .	3350

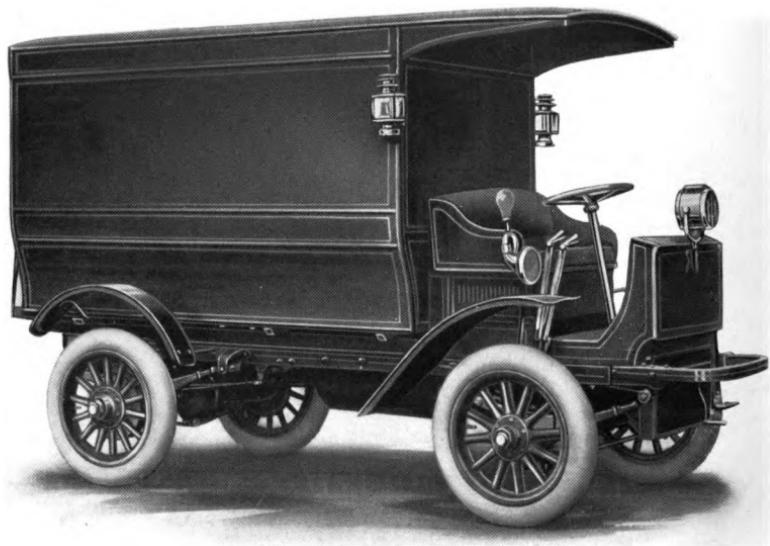

MODEL: AUTOCAR XXI


COLOR . . . . .	Chassis, Autocar red; body, optional.	ARRANGED . . . . .	Horizontally opposed under driver's seat.
CARRYING CAPACITY	3,000 pounds.	CAST . . . . .	Separately.
CLUTCH . . . . .	Multiple disc.	BORE . . . . .	4 $\frac{3}{4}$ inches.
WHEELBASE . . . . .	97 inches.	STROKE . . . . .	4 $\frac{1}{4}$ inches.
GAUGE . . . . .	58 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:			
FRONT . . . . .	34 x 3 $\frac{1}{2}$ inches(solid); or 36 x 5 inches(pneumatic).	RADIATOR . . . . .	Vertical tube.
REAR . . . . .	34 x 4 inches (solid); or 36 x 5 inches(pneumatic).	IGNITION . . . . .	Jump spark.
BRAKE SYSTEMS . . . . .	Contracting and expanding on both rear wheels.	ELECTRIC SOURCE . . . . .	High tension magneto.
HORSE-POWER . . . . .	(A.L.A.M. rating) 18.	DRIVE . . . . .	Shaft.
CYLINDERS . . . . .	Two.	TRANSMISSION . . . . .	Progressive sliding gear.
		GEAR CHANGES . . . . .	Three forward, one reverse.
		POSITION OF DRIVER . . . . .	Right side drive and right hand control.

Price includes gas tank, storm apron and front side curtains.

219  
240  
251  
252  
253  
254  
255  
256  
257  
258  
259

THE AUTOCAR  
C O M P A N Y  
ARDMORE, PA.

Price, Chassis . . . . .	\$2150
With Open Express Body . . . . .	2300
With Stake Body . . . . .	2325
With Six-Post Open Body . . . . .	2325
With Six-Post Open Body with Wheel Pockets . . . . .	2325
With Furniture Body . . . . .	2375
With Single Curved Closed Body	2375

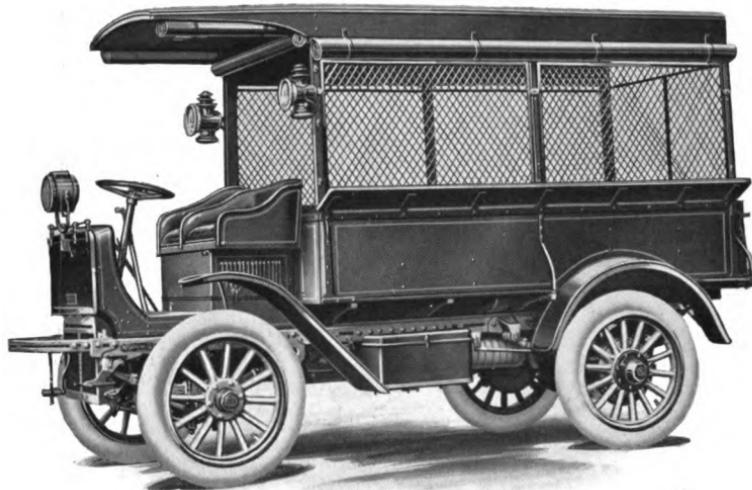


MODEL: AUTOCAR XXI

COLOR . . . . .	Chassis, Autocar red; body, optional.	ARRANGED . . . . .	Horizontally opposed under driver's seat.
CARRYING CAPACITY	3,000 pounds.	CAST . . . . .	Separately.
CLUTCH . . . . .	Multiple disc.	BORE . . . . .	4½ inches.
WHEELBASE . . . . .	97 inches.	STROKE . . . . .	4¾ inches.
GAUGE . . . . .	58 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Vertical tube.
FRONT . . . . .	34 x 3½ inches (solid); or 36 x 5 inches (pneumatic).	IGNITION . . . . .	Jump spark.
REAR . . . . .	34 x 4 inches (solid); or 36 x 5 inches (pneumatic).	ELECTRIC SOURCE	High tension magneto.
BRAKE SYSTEMS . . .	Contracting and expanding on both rear wheels.	DRIVE . . . . .	Shaft.
HORSE-POWER . . .	(A.L.A.M. rating) 18.	TRANSMISSION . .	Progressive sliding gear.
CYLINDERS . . . . .	Two.	GEAR CHANGES . .	Three forward, one reverse.
POSITION OF DRIVER			
Right side drive and right hand control.			

Price includes gas tank, storm apron and front side curtains.

PIERCE-ARROW  
MOTOR CAR  
COMPANY  
BUFFALO, N. Y.

Price, Chassis . . . . . \$4500

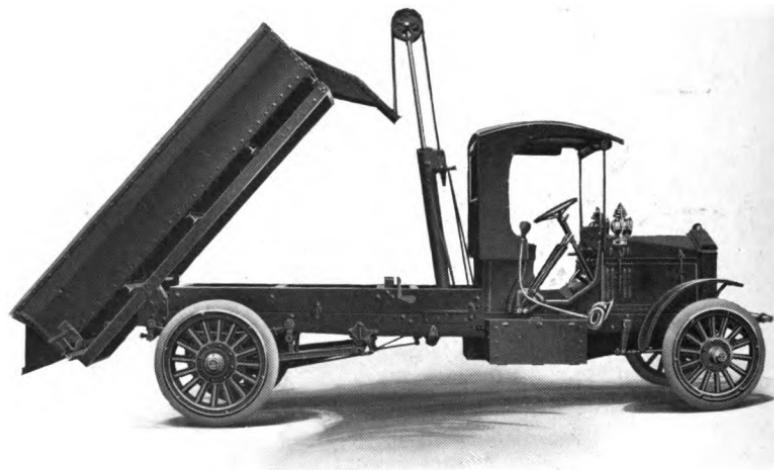

MODEL: PIERCE-ARROW FIVE-TON TRUCK


COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
CARRYING CAPACITY	Five tons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	6 inches.
WHEELBASE . . . . .	168 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	69 inches.	RADIATOR . . . . .	Tubular.
TIRE DIMENSIONS:			
FRONT . . . . .	36 x 5 inches (single).	IGNITION . . . . .	Jump spark.
REAR . . . . .	40 x 6 inches (dual).	ELECTRIC SOURCE	High tension magneto and storage battery.
BRAKE SYSTEMS . . .	Contracting on transmission and both rear wheels.	DRIVE . . . . .	Worm.
HORSE-POWER . . . . .	(A. L. A. M. rating) 38.	TRANSMISSION . . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . .	Three forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER	Right side drive and right hand control.

Price includes driver's seat and top.

**PEERLESS  
MOTOR CAR  
COMPANY**

CLEVELAND, OHIO

Price, Chassis . . . . .	\$4500
Three-Ton . . . . .	3700
Four-Ton . . . . .	4000

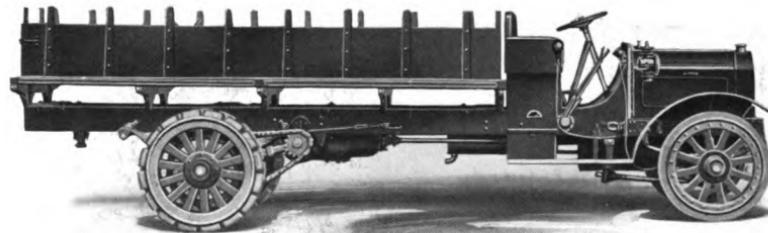


**MODEL: PEERLESS FIVE-TON TRUCK**

COLOR . . . . .	Optional.	CAST . . . . .	In pairs.
CARRYING CAPACITY	Five tons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	6½ inches.
WHEELBASE . . . . .	151 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	Front, 68 inches; rear, 73½ inches.	RADIATOR . . . . .	Tubular.
TIRE DIMENSIONS:			
FRONT . . . . .	38 x 6 inches (solid)	IGNITION . . . . .	Jump spark.
REAR . . . . .	42 x 6 inches (dual solid)	ELECTRIC SOURCE .	High tension magneto and storage battery.
BRAKE SYSTEMS . . .	Contracting on jack-shaft and expanding on both rear wheels.	DRIVE . . . . .	Double side chain.
HORSE-POWER . . . . .	(A. L. A. M. rating) 32.4.	TRANSMISSION . . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . .	Four forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER	Right side drive and right hand control.

**KNOX AUTOMOBILE  
C O M P A N Y  
SPRINGFIELD, MASS.**

Price, Chassis . . . . .	\$3000
With Express Body . . . . .	3250
With Stake and Platform Body . . . . .	3250
With Brewery Body . . . . .	3300

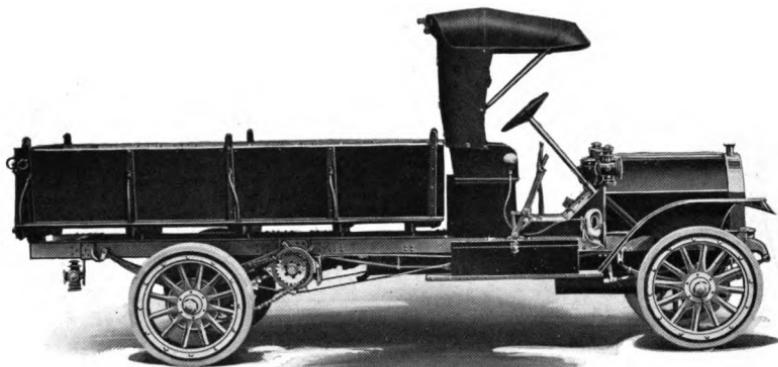


**MODEL: KNOX TWO-TON TRUCK—R-3**

COLOR . . . . .	Optional.	CAST . . . . .	Separately.
CARRYING CAPACITY	Two tons.	BORE . . . . .	5 inches.
CLUTCH . . . . .	Three-plate.	STROKE . . . . .	5 $\frac{1}{2}$ inches.
WHEELBASE . . . . .	145 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	60 inches.	RADIATOR . . . . .	Tubular.
TIRE DIMENSIONS:			
FRONT . . . . .	34 x 4 inches (single).	IGNITION . . . . .	Jump spark.
REAR . . . . .	34 x 4 inches (dual).	ELECTRIC SOURCE . . . . .	High tension magneto and dry batteries.
BRAKE SYSTEMS . . . . .	Contracting on jack-shaft and expanding on both rear wheels.	DRIVE . . . . .	Double side chain.
HORSE-POWER . . . . .	(A. L. A. M. rating) 40.	TRANSMISSION . . . . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . . . .	Three forward, one reverse.
ARRANGED . . . . .	Vertically, under hood.	POSITION OF DRIVER	Right side drive and right hand control.

SELDEN MOTOR  
VEHICLE  
COMPANY  
ROCHESTER  
NEW YORK

Price, Chassis . . . \$2000

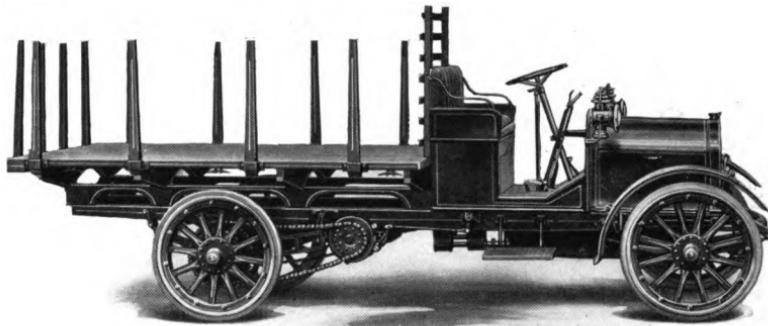


MODEL: SELDEN ONE-TON TRUCK—J

COLOR . . . . .	Optional.	CAST . . . . .	En bloc.
CARRYING CAPACITY	1 ton.	BORE . . . . .	3 $\frac{3}{4}$ inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	5 $\frac{1}{4}$ inches.
WHEELBASE . . . . .	125 inches or 145 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	Front, 56 inches; rear, 60 inches.	RADIATOR . . . . .	Vertical tube.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark (dual system).
FRONT . . . . .	36 x 3 $\frac{1}{2}$ inches.	ELECTRIC SOURCE	High tension magneto and dry batteries.
REAR . . . . .	36 x 4 inches.	DRIVE . . . . .	Double side chain.
BRAKE SYSTEMS . . .	Expanding on jack-shaft and both rear wheels.	TRANSMISSION . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 22.5.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Left side drive and center control.
ARRANGED . . . . .	Vertically, under hood.		

GENERAL  
MOTORS TRUCK  
COMPANY  
PONTIAC, MICH.

Price, Chassis . . . . . \$4400  
With Automatic Dumping Body 5000

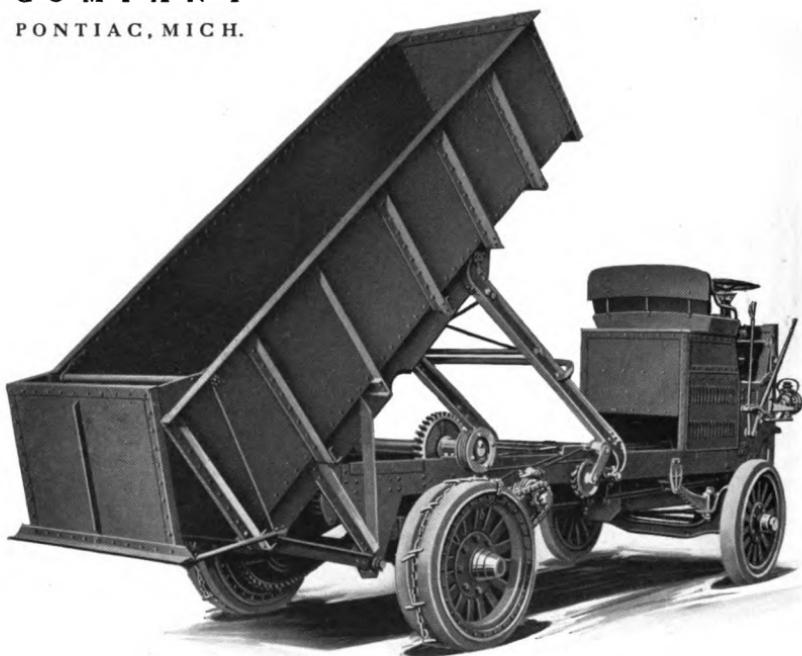


**MODEL: G.M.C. FIVE-TON AUTOMATIC DUMPING TRUCK**

COLOR . . . . .	Chassis, bright red, canary yellow or olive green; body, dark red, orange or olive green.	ARRANGED . . . . .	Vertically, under driver's seat.
CARRYING CAPACITY	Five tons.	CAST . . . . .	In pairs.
CLUTCH . . . . .	Multiple disc.	BORE . . . . .	5 inches.
WHEELBASE . . . . .	132 inches.	STROKE . . . . .	5 inches.
GAUGE . . . . .	Front, 66 inches; rear, 69 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Cellular.
FRONT . . . . .	36 x 6 inches (single)	IGNITION . . . . .	Jump spark.
REAR . . . . .	36 x 5 inches (dual)	ELECTRIC SOURCE . . . . .	High tension magneto and dry batteries.
BRAKE SYSTEMS . . . . .	Contracting on jack-shaft and both rear wheels.	DRIVE . . . . .	Double side chain.
HORSE-POWER . . . . .	(A.L.A.M. rating) 40.	TRANSMISSION . . . . .	Progressive sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . . . .	Three forward, one reverse.
		POSITION OF DRIVER	Right side drive and right hand control.

RELIANCE  
MOTOR TRUCK  
COMPANY  
OWOSO, MICH.

Price, Chassis . . . . . \$3500

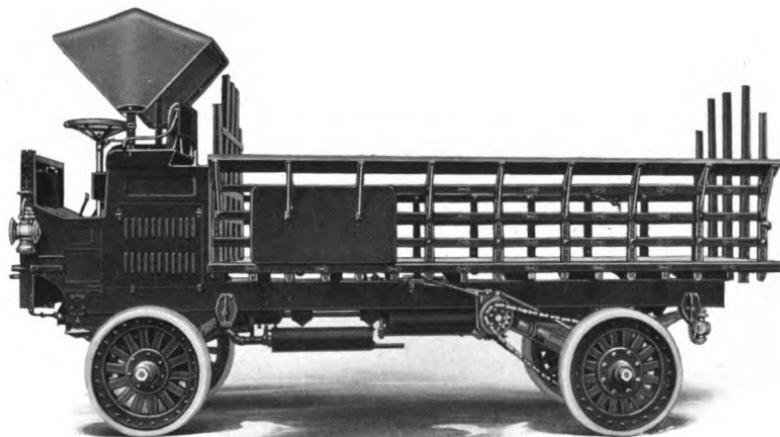


**MODEL: G.M.C. THREE AND A HALF-TON TRUCK**

COLOR . . . . .	Chassis, bright red, canary yellow or olive green; body, dark red, orange or olive green.	ARRANGED . . . . .	Vertically, under driver's seat.
CARRYING CAPACITY	Three and a half tons.	CAST . . . . .	In pairs.
CLUTCH . . . . .	Multiple disc.	BORE . . . . .	5 inches.
WHEELBASE . . . . .	138 inches.	STROKE . . . . .	5 inches.
GAUGE . . . . .	Front, 65 inches; rear, 65 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Cellular.
FRONT . . . . .	36 x 5 inches (single)	IGNITION . . . . .	Jump spark
REAR . . . . .	36 x 4 inches (dual)	ELECTRIC SOURCE . . . . .	High tension magneto and dry batteries.
Brake Systems . . . . .	Contracting on jack-shaft and both rear wheels.	DRIVE . . . . .	Double side chain.
HORSE-POWER . . . . .	(A.L.A.M. rating) 40.	TRANSMISSION . . . . .	Progressive sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . . . .	Three forward, one reverse.
		POSITION OF DRIVER	Right side drive and right hand control.

VELIE MOTOR  
VEHICLE  
COMPANY  
MOLINE, ILL.

Price, Chassis . . . . . \$3350  
With Standard Body . . . . . 3500

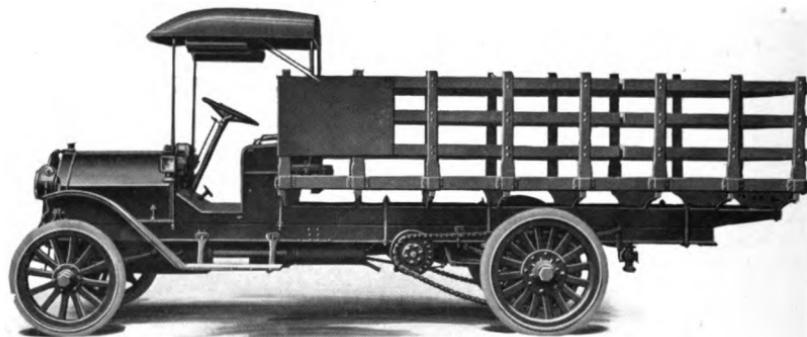

**MODEL: VELIE THREE-TON TRUCK-Z**

COLOR . . . . .	Body, standard blue; running gear, gray.	ARRANGED . . . . .	Vertically, under hood.
CARRYING CAPACITY	Three tons.	CAST . . . . .	In pairs.
CLUTCH . . . . .	Multiple dry disc.	BORE . . . . .	4½ inches.
WHEELBASE . . . . .	148 or 172 inches.	STROKE . . . . .	5½ inches.
GAUGE . . . . .	66 inches.	COOLING . . . . .	Water.
TIRE DIMENSIONS:		RADIATOR . . . . .	Honeycomb.
FRONT . . . . .	36 x 5 inches.	IGNITION . . . . .	Jump spark.
REAR . . . . .	40 x 5 inches (dual)	ELECTRIC SOURCE	High tension magneto and dry batteries.
Brake Systems . . . . .	Expanding on jack shaft and both rear wheels.	DRIVE . . . . .	Double side chain.
HORSE-POWER . . . . .	(A. L. A. M. rating) 32.4.	TRANSMISSION . . . . .	Selective sliding gear.
CYLINDERS . . . . .	Four.	GEAR CHANGES . . . . .	Three forward, one reverse.
POSITION OF DRIVER Right side drive and right hand control.			

Price includes top, prestolite tank and demountable rims.

**R E O M O T O R  
C A R C O M P A N Y**  
**L A N S I N G, M I C H.**

Price . . . . . \$750  
With Express Body . . . . . 750  
With Platform Body . . . . . 750




**MODEL: REO DELIVERY TRUCK-H**

COLOR . . . . .	Green with black fenders.	BORE . . . . .	4 $\frac{3}{4}$ inches.
CARRYING CAPACITY	1500 pounds.	STROKE . . . . .	6 inches.
CLUTCH . . . . .	Multiple disc.	COOLING . . . . .	Water.
WHEELBASE . . . . .	90 inches.	RADIATOR . . . . .	Vertical tube.
GAUGE . . . . .	56 inches.	IGNITION . . . . .	Jump spark.
TIRE DIMENSIONS:		ELECTRIC SOURCE	Dry batteries.
FRONT . . . . .	36 x 2 inches.	DRIVE . . . . .	Double side chain.
REAR . . . . .	36 x 2 $\frac{1}{2}$ inches.	TRANSMISSION . . .	Planetary gears.
BRAKE SYSTEMS . . .	Contracting on jack-shaft and both rear wheels.	GEAR CHANGES . . .	Two forward, one reverse.
HORSE-POWER . . .	(A.L.A.M. rating) 9.	POSITION OF DRIVER	Left side drive and center control.
CYLINDERS . . . . .	One.		
ARRANGED . . . . .	Horizontally, under seat.		

**R E O M O T O R  
C A R C O M P A N Y  
L A N S I N G, M I C H.**

Price . . . . . \$1800  
With Stake Body . . . 1950

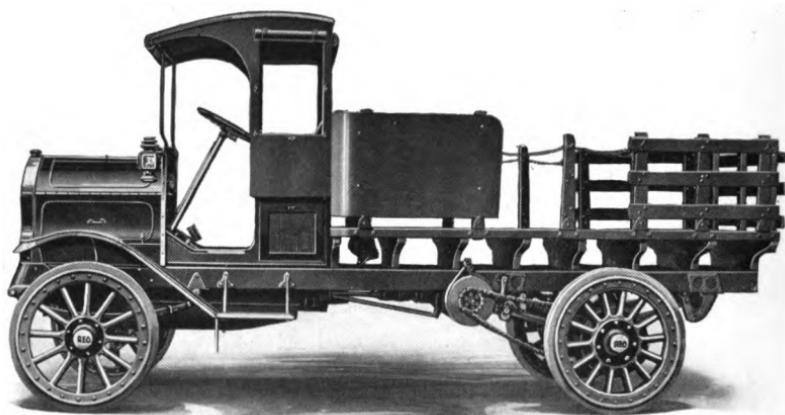


**MODEL: REO TWO-TON TRUCK—J**

COLOR . . . . .	Gray, with black fenders and striping.	CAST . . . . .	In pairs.
CARRYING CAPACITY	Two tons.	BORE . . . . .	4 inches.
CLUTCH . . . . .	Multiple disc.	STROKE . . . . .	4½ inches.
WHEELBASE . . . . .	130 inches.	COOLING . . . . .	Water.
GAUGE . . . . .	60 inches.	RADIATOR . . . . .	Vertical tube.
TIRE DIMENSIONS:		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 4 inches.	ELECTRIC SOURCE	Low tension magneto and dry batteries.
REAR . . . . .	36 x 3 inches (dual).	DRIVE . . . . .	Double side chain.
Brake Systems . . . . .	Contracting on jack-shaft and both rear wheels.	TRANSMISSION . . .	Selective sliding gear.
HORSE-POWER . . . . .	(A. L. A. M. rating) 25.6.	GEAR CHANGES . . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Left side drive and center control.
ARRANGED . . . . .	Vertically, under hood.		

Price includes cab.

F E D E R A L  
M O T O R T R U C K  
C O M P A N Y  
DETROIT, MICH

Price, Chassis . . . \$1800

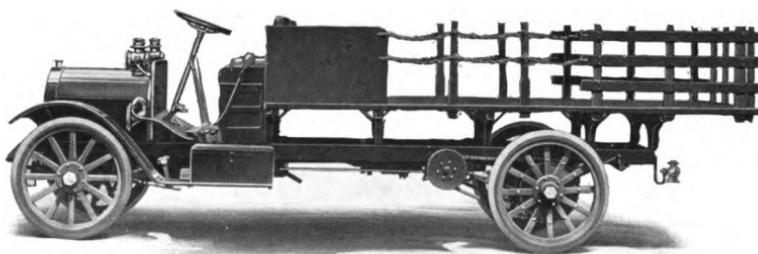

**MODEL: FEDERAL ONE AND ONE-HALF-TON TRUCK—"D" AND "C"**

COLOR . . . . .	In lead.	CAST . . . . .	In pairs.
CARRYING CAPACITY	1½ tons.	BORE . . . . .	4½ inches.
CLUTCH . . . . .	Cone.	STROKE . . . . .	4½ inches.
WHEELBASE . . . . .	144 inches or 110 inches (optional).	COOLING . . . . .	Water.
GAUGE . . . . .	58 inches.	RADIATOR . . . . .	Vertical tube.
TIRE DIMENSIONS :		IGNITION . . . . .	Jump spark.
FRONT . . . . .	36 x 3½ inches.	ELECTRIC SOURCE .	High tension magneto
REAR . . . . .	36 x 4 inches.	DRIVE . . . . .	Double side chain.
BRAKE SYSTEMS . .	Internal expanding on jack-shaft and both rear wheels.	TRANSMISSION . .	Selective sliding gear.
HORSE-POWER . . . .	(A. L. A. M. rating) 28.9.	GEAR CHANGES . .	Three forward, one reverse.
CYLINDERS . . . . .	Four.	POSITION OF DRIVER	Left side drive and left hand control.
ARRANGED . . . . .	Vertically, under hood.		



## CATALOGUE REQUEST BLANK

(To be sent direct to the manufacturer.  
For address see pages on which models are shown)

19

GENTLEMEN:—Please send me catalogue describing your automobiles shown in the HAND BOOK OF GASOLINE AUTOMOBILES, published by the Automobile Board of Trade, and oblige,

Name \_\_\_\_\_

Street \_\_\_\_\_ City \_\_\_\_\_

## CATALOGUE REQUEST BLANK

(To be sent direct to the manufacturer.  
For address see pages on which models are shown)

19

GENTLEMEN:—Please send me catalogue describing your automobiles shown in the HAND BOOK OF GASOLINE AUTOMOBILES, published by the Automobile Board of Trade, and oblige,

Name \_\_\_\_\_

Street \_\_\_\_\_ City \_\_\_\_\_

## CATALOGUE REQUEST BLANK

(To be sent direct to the manufacturer.  
For address see pages on which models are shown)

19

GENTLEMEN:—Please send me catalogue describing your automobiles shown in the HAND BOOK OF GASOLINE AUTOMOBILES, published by the Automobile Board of Trade, and oblige,

Name \_\_\_\_\_

Street \_\_\_\_\_ City \_\_\_\_\_









UNIVERSITY OF CHICAGO



105 712 433

UNIVERSITY OF CHICAGO



105 712 433



UNIVERSITY OF CHICAGO



105 712 433